


CATALOGO STRUMENTI

Ricerca & Sviluppo

MONITORAGGIO E CONTROLLO

OSCILLOSCOPI REGISTRATORI

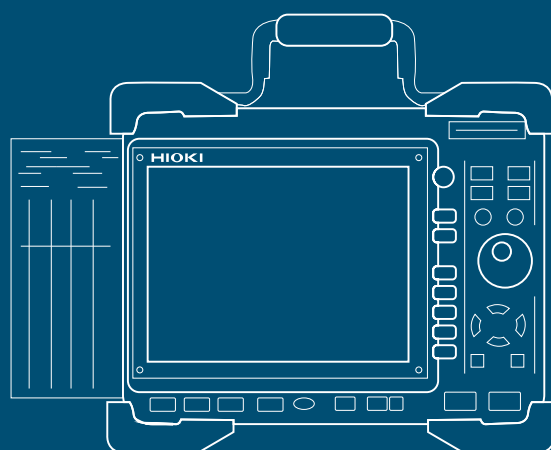

TECNOLOGIA

HIOKI

asita

TECNOLOGIE DI MISURA



INDICE

MONITORAGGIO E CONTROLLO

Oscilloscopi registratori	p 3
MR8880	p 3
MR8870	p 23
MR8847A	p 31
MR8875	p 39
MR8827	p 55
MR8740 - MR8741	p 71
MR6000	p 83



STRUMENTI **R&S**

MISURE PRIMARIE

- IMPEDENZIMETRI
- PONTI LCR
- OHMETRI - MICROHMETRI - MILLIOHMETRI - MEGA-OHMETRI - SUPER-MEGA-OHMETRI
- MULTIMETRI
- VOLTMETRI
- WATTMETRI

MONITORAGGIO E CONTROLLO ◀

- DATA LOGGER
- OSCILLOSCOPI REGISTRATORI ◀

PROVE E VERIFICHE

- PROVA BATTERIA
- PROVA RIGIDITA' DIELETTICA ED ISOLAMENTO
- PROVA ISOLAMENTO
- PROVA DI CONTINUITA'
- PROVA CORRENTE DISPERSA

SENSORI e ACCESSORI

HIOKI

MEMORY HiCORDER MR8847A

Max.
20 MS/s
high-speed sampling

All analog channels
isolated
Max. 16 channels

Logic channels
Max. **64 ch**
16 channels standard



For on-site work and R&D testing
Global Standard Recorder

High-voltage 1000 V direct input measurement

HIGH-VOLTAGE UNIT Max. 1 MS/s high-speed sampling, 16-bit resolution measurement

Generate and record in a single unit

ARBITRARY WAVEFORM GENERATOR UNIT Reproduce and output problematic waveform measurements
No amp needed; max. 15 V output




asita
TECNOLOGIE DI MISURA

Testing




Vibration testing at the product development stage

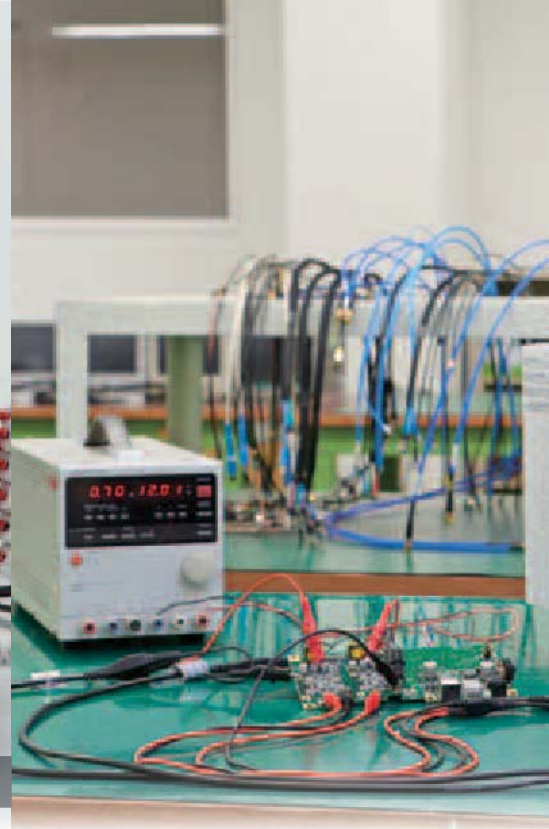

A high-spec, high-quality versatile measuring device

20 MS/sec sampling speed


Perform multi-channel, high-speed sampling at 20 M samples/sec (time axis resolution: 50 nsec) for all channels at the same time.

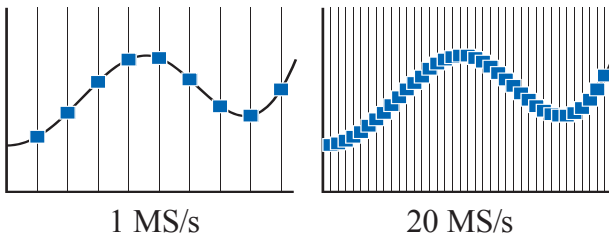

1 MS/s

20 MS/s

High-speed sampling allows you to measure the rising edge of pulses and detect anomaly operations and instantaneous waveforms that occur suddenly with high precision.



Observe the rising edge of pulses



Input amp with integrated A/D converter

Isolated input for all channels

Connections between analog input channels, and between the input channel and the main unit, are isolated by isolation elements. So potential differences can be measured without any concerns, just like with an oscilloscope.



Isolation element

A4 size built-in printer

Print large, high-definition hard copies for easy on-site checking. Paper is easy to replace by inserting a new roll, rolling out the paper slightly, and then closing the cover.



Simply open the cover, insert the new paper, and then close the cover.

Development



Generating + monitoring

Surveys



Power supply surveys for power equipment

Abundant modules

Hioki has added new high-performance modules in response to overwhelming demand. The Memory HiCorder now supports a wide variety of measurements.



64 logic input channels +10 analog channels


The MR8847A has 16 built-in logic input channels. Add 3 logic input units to record a total of 64 channels at once. You can also display the waveforms for all channels on a single screen—ideal for timing measurements. Up to 10 channels of analog waveforms can be recorded at the same time for efficiency.



Measure and display multiple relays at the same time

Large 512 MW capacity (MR8847-53 only)

Hioki has developed an internal storage FPGA for super-high-speed access. Used in combination with large capacity high-speed memory, this enables many hours of high-speed sampling to be recorded.



NEW SSD 128 GB storage media

The new internal SSD unit (available as an additional option) has 128 GB of capacity, allowing large amounts of data to be stored.



Durable design, with resistance to dropping up to 50 cm

The MR8847A is resistant to strong mechanical shock and vibration, such as short drops. The durable design has been tested to withstand vertical drops of up to 50 cm.



* Tested based on in-house conditions. A dropped unit is not guaranteed to be free of damage or trouble.

HIGH VOLTAGE UNIT U8974


Directly input high voltage without a differential probe



2 channels, banana input terminal
Both channels support 1000 V input


1000 V DC, 700 V AC high-voltage direct input

Since you can directly input up to 1000 V DC and 700 V AC, a differential probe is no longer necessary. Maximum rated voltage to ground is 1000 V for CAT III and 600 V for CAT IV environments.

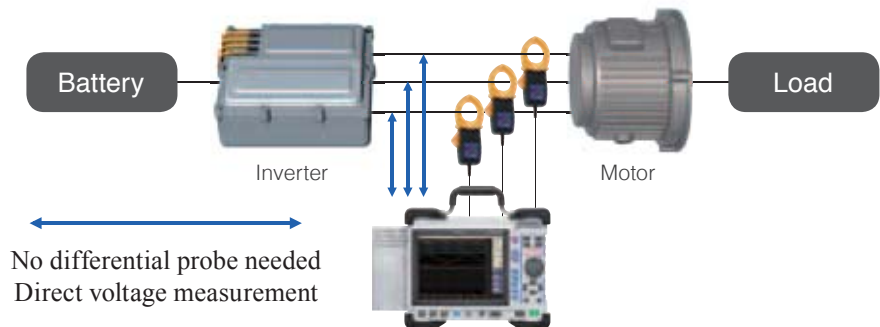

Global power supply line measurement

Ideal for primary and secondary measurements of UPS power supplies and commercial power supply transformers, and for recording the primary and secondary waveforms of inverters. It can also be used to measure high-voltage power supply lines, such as 380 V and 480 V systems used in many countries.

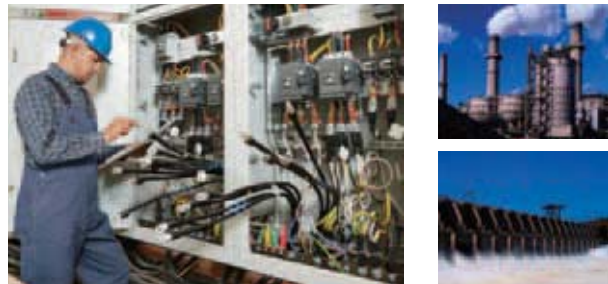


Supports high voltage systems around the world

Applicable to a variety of characteristics tests

Maximum 1 MS/s high-speed sampling and 16-bit resolution allow the MR8847A to be used for interruption testing and switch testing.

The voltage of each battery cell can be input separately. This uses 1000 V DC input, which can withstand even if high voltage is applied when a cell shorts.

The digital voltmeter unit, which allows input up to 500 V DC, is suitable for the testing of individual battery cells.

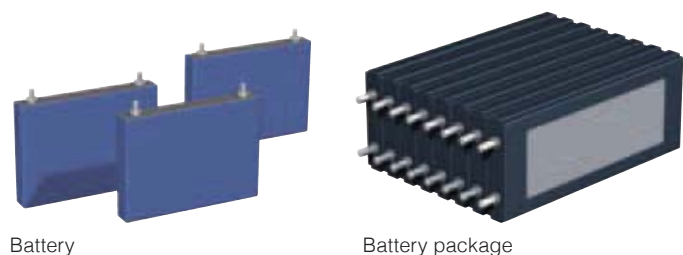

Battery

Battery package

Transformer Dump Tests

Interchannel isolation allows for safe circuit connections. Simultaneous high-speed sampling can record waveforms before and after the dump. Input large numbers of control and circuit signals.

Recommended units



HIGH VOLTAGE UNIT
U8974

CURRENT UNIT
8971

LOGIC UNIT
8973



Application of each unit allows analysis of the correlation between voltage before and after the interruption of a generator, RPM fluctuation rate, governor servo motor operation conditions, and suppression machine switch timing.

- Maximum 1 MS/s high-speed sampling and 16-bit resolution in the high-voltage unit allow the MR8847A to be used for interruption and switch testing.

ARBITRARY WAVEFORM GENERATOR UNIT U8793

Generate and record in a single unit




Output and record results seamlessly

Just one MEMORY HiCORDER gives you a function generator mode, arbitrary waveform generator mode, and waveform measurement mode. This makes it easy to observe waveforms while varying test conditions, such as changing the signal's amplitude and frequency and programming various waveforms to output in order.




Output recorded waveforms without modification

For example, you could output actual waveforms recorded from a car without modification, and then use them for standalone testing. You can also generate isolated output of up to 15 V without a generator or amplifier, which is traditionally necessary in order to generate output while varying the signal's amplitude and frequency.

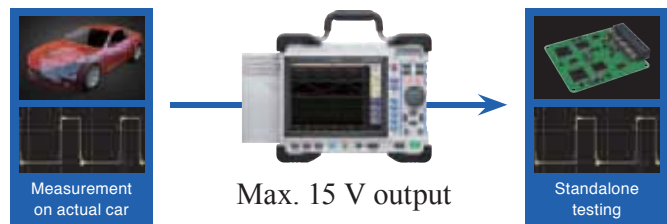


Process actual waveforms for reproducibility testing

Process and calculate signals recorded with the MEMORY HiCORDER and output the arbitrary waveforms that you create.

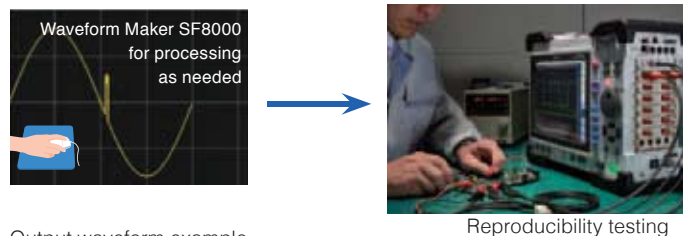

Waveform Maker Software included


After you install the included SF8000 Waveform Maker software on your computer, you can create waveforms easily by either entering them directly or by entering the functions behind them. You can also quickly add noise and multiply waveforms.

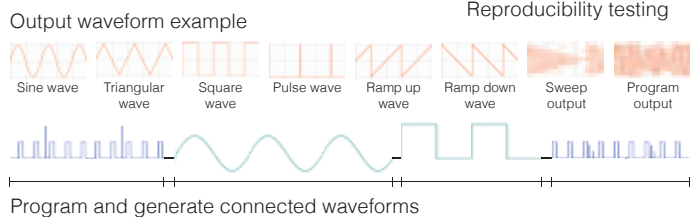

Anomaly Simulation

Reproduce and output the observed waveforms without modification. When resolving problems observed during research or development, you can reproduce such problems for efficient testing.

Recommended units

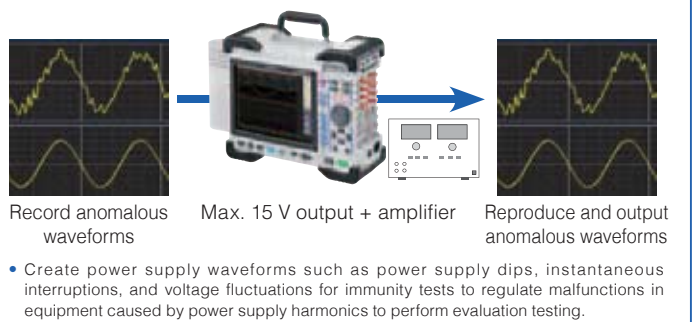

The right unit for your measurement needs

Inverter / UPS Test

- Operation testing and evaluation during load fluctuation
- Confirmation of UPS switching

Recommended units

ANALOG UNIT 8966
LOGIC UNIT 8973
CURRENT UNIT 8971

Perfect for inverter and UPS evaluation / start-up tests. Record using both logic (control signals) and analog (primary/secondary voltage or current for a UPS or inverter).



UPS



Inverter


Power Monitor and Logger

- Identify power fluctuations when power supply is turned ON/OFF and during load fluctuations
- Long-term fluctuations in power

Recommended units

ANALOG UNIT 8966
HIGH RESOLUTION UNIT 8968
FREQ UNIT 8970

Load the analog output for the rms (instant power / voltage / current, etc.) calculated by the power analyzer, or import the waveform output from the power analyzer to observe data for long-term tests or irregular waveforms.

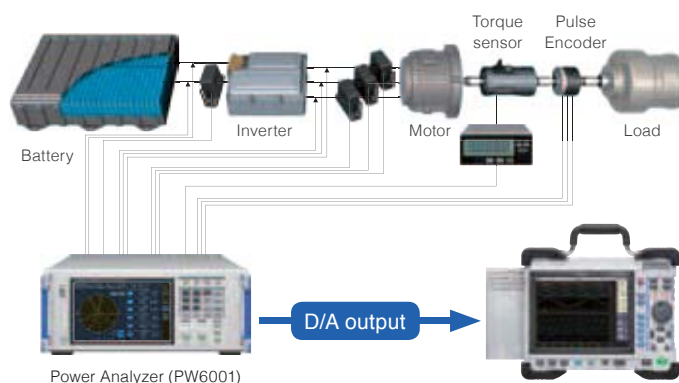

Power Analyzer (PW6001)

Control Simulation

- Generate simulated output of each type of sensor signal
- Fluctuating simulated output for 12 V DC car batteries

Recommended units

ARBITRARY WAVEFORM GENERATOR UNIT U8793
WAVEFORM GENERATOR UNIT MR8490
PULSE GENERATOR UNIT MR8791

Use actual waveforms to perform testing on control boards, such as for engine control, airbags, brake systems, power steering, and active suspension. This allows efficient simulation of actual waveforms obtained from cars.



Perfect for control testing of automobiles, high speed trains, and traditional trains

13 units to choose from


Generation	Voltage	DC voltage	Generation	Pulse	Voltage
ARBITRARY WAVEFORM GENERATOR UNIT U8793	HIGH VOLTAGE UNIT U8974	DIGITAL VOLTMETER UNIT MR8990	WAVEFORM GENERATOR UNIT MR8790	PULSE GENERATOR UNIT MR8791	ANALOG UNIT 8966
No. of channels: 2 Arbitrary waveform output	Measurement resolution: 16-bit 1/1600 of measurement range	Measurement resolution: 24-bit 1/50 000 of measurement range	No. of channels: 4 Waveform output	No. of channels: 8 Pulse output	Measurement resolution: 12-bit 20 MS/s high-speed sampling
• Output frequency range 10m Hz to 100 kHz • Max. output: 15 V	• High voltage • Commercial power supply (primary/secondary) • Power equipment characteristics testing	• Multi-channel • Minute sensor voltage • EV battery voltage	• DC output: -10 V to 10 V • Sine wave output 10 mHz to 20 kHz	• Pulse output 0.1 Hz to 20 kHz • Pattern output	• Various amps • Transducers • Sensors • Industrial meters

Vibration / Endurance Tests

- Analyze the relationship between engine control and vibration
- Confirm equipment durability

Recommended units	ARBITRARY WAVEFORM GENERATOR UNIT U8793
	HIGH RESOLUTION UNIT 8968
	STRAIN UNIT U8969

512 MW of high-capacity memory makes it easy to observe vibration waveforms for many hours while performing high-speed sampling. This feature is perfect for detecting waveform peaks.



Observe minor vibrations with high precision



Vibration testing equipment

Replace multiple DMMs with a single unit

Save space by replacing multiple desktop DMM units with a single MEMORY HiCORDER. This eliminates the need to control multiple units and simplifies your system.

Recommended units	DIGITAL VOLTMETER UNIT MR8990
-------------------	-------------------------------



Install up to 8 DVM Units to expand up to 16 channels

DIGITAL VOLTMETER UNIT MR8990

Fine precision and resolution

Proprietary specifications for DC voltage measurements

Measure minute fluctuations in sensor output for automobiles or voltage fluctuations in batteries with high precision and at high resolution. The maximum voltage that you can input is 500 V DC. Another feature is high input resistance.

Measurement range		Effective input range (Guaranteed measurement accuracy range)	Max. resolution	Input resistance	Measurement accuracy	
					NPLC: less than 1	NPLC: 1 or more
5 mV/div	(f.s. = 100 mV)	-120 mV to 120 mV	0.1 μ V	100 M Ω or more	\pm 0.01% rdg.	\pm 0.01% rdg.
50 mV/div	(f.s. = 1000 mV)	-1200 mV to 1200 mV	1 μ V		\pm 0.015% f.s.	\pm 0.01% f.s.
500 mV/div	(f.s. = 10 V)	-12 V to 12 V	10 μ V	10 M Ω \pm 5%	\pm 0.01% rdg.	
5 V/div	(f.s. = 100 V)	-120 V to 120 V	100 μ V		\pm 0.0025% f.s.	
50 V/div	(f.s. = 1000 V)	-500 V to 500 V	1 mV		\pm 0.025% rdg.	
					\pm 0.0025% f.s.	

● 6.5-digit display (Resolution: 0.1 μ V), 24-bit high resolution

Temperature	Voltage	Distortion	Frequency, RPM	Current	Voltage	Contact
TEMP UNIT 8967 	HIGH RESOLUTION UNIT 8968 	STRAIN UNIT U8969 	FREQ UNIT 8970 	CURRENT UNIT 8971 	DC/RMS UNIT 8972 	LOGIC UNIT 8973
Measurement resolution: 16-bit 1/1000 of measurement range	Measurement resolution: 16-bit 1/1600 of measurement range	Measurement resolution: 16-bit 1/1250 of measurement range	Measurement resolution: 16-bit 1/2000 of measurement range	Measurement resolution: 12-bit Clamp sensor direct connection	Measurement resolution: 12-bit RMS measurement	No. of channels: 16 Observation of control signal
• Thermocouple K, J, E, T, N, R, S, B, W	• Supply voltage • Primary / secondary inverter voltage • Motor voltage, etc.	• Strain gauge converter • Dynamic strain * Vibration • Pressure * Acceleration • Weight, etc.	• Encoder • Rotating pulse	• Supply current • Inverter current • Motor current, etc.	• Supply voltage • Primary / secondary inverter voltage • Motor voltage, etc.	• Voltage / non-voltage contacts • Relay signals • AC / DC signals

Full range of supporting functions


On-site assistance

Help function

Understand operation methods without even reading the instruction manual using the built-in Help function. Place the cursor on a field in the settings and press the HELP button to view a detailed description of that setting.



Press the HELP button.

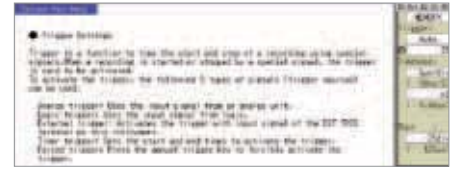

A detailed description of the setting is displayed.

Master triggers

Set triggers while viewing waveforms

Set input triggers while checking waveforms. You can also display the settings screen separately as a floating screen.

Trigger functions for monitoring all measurement channels

- Level trigger for comparing a single voltage value
- Window trigger for comparing 2 voltage values
- Voltage drop trigger for detecting voltage drops in commercial power lines
- Period trigger for monitoring periods
- Glitch trigger for detecting anomalies in pulses
- Pattern trigger for comparisons when the logic signal is ON/OFF


Acquiring data with triggers, and post-acquisition searching

The MR8847A includes a search function for finding abnormal waveforms within all of the acquired data. You can use this function to search for anomalies after data has been acquired, when it is too difficult to set triggers because it is not possible to predict what types of anomalies might be observed.


Set the number of events for each source

* Only for level and glitch triggers

Set trigger conditions in a variety of combinations.

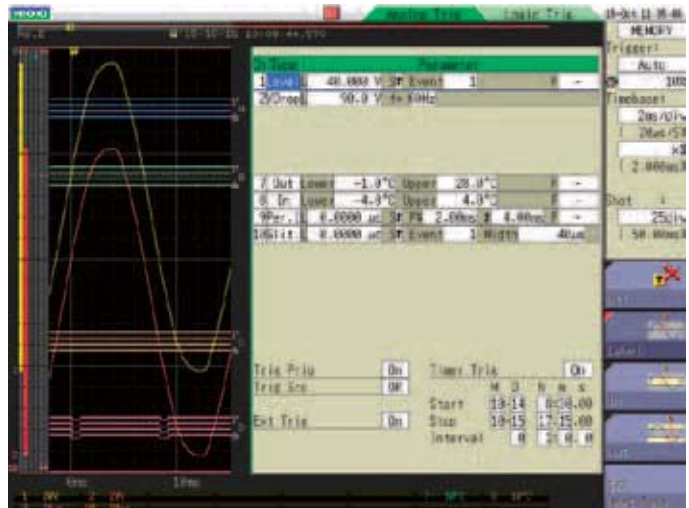

Adjust levels while displaying waveforms



Detect instantaneous outages

Ch Type	Parameter	Event
1LevelL	100.0 V	Event 1
2LevelL	80.00 V	Event 5
3LevelL	0.000 V	Event 1
4LevelL	0.000 V	Event 1
5LevelL	0.000 V	Event 1

Setting screen for number of events


Label each channel

Comment entry function

Set comments for each channel and display them on the screen, even when observing multiple channels, making identification easy.

When printing, you can also print the channel comments.

Input comments directly on the unit or by using a USB keyboard.

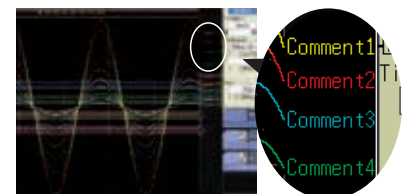

Enlarge waveforms

Zoom function

Display time axis reduced waveforms at the top of the screen, and time axis enlarged waveforms at the bottom of the screen. You can use the scroll function to display the entire waveform while also observing specific parts.

Collapse waveform




Check the entire waveform.

Expand waveform



Enlarge/shrink along the time/vertical axes.

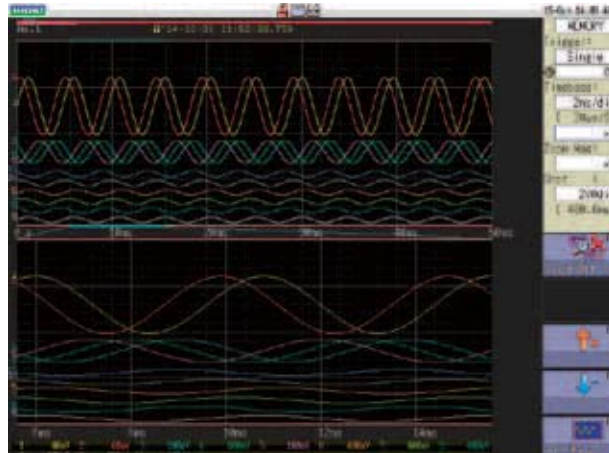

Enlarge to observe waveform details

Scan and clip

AB cursor function

Apply the Zoom function to set point A and point B for the area you want to clip.

Scan




Scan data at the cursor and the waveform's cross point.

Extract



Specify the segment to save as binary or CSV data.

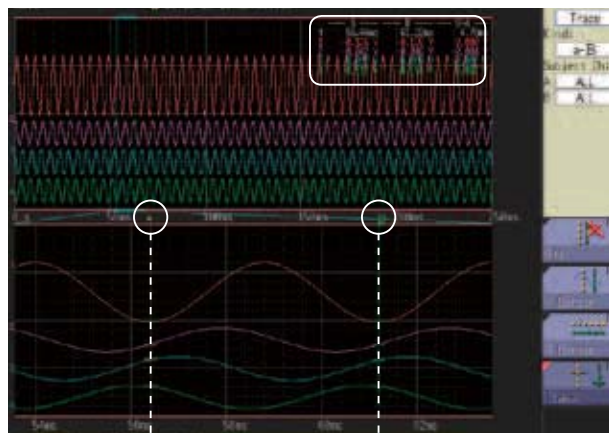


Conveniently manage scanned data on your computer

PC operations

Connect to LAN for HTTP/FTP server functions

Use the HTTP function to operate the MEMORY HiCORDER with a browser on a PC connected via LAN. You can also use the FTP function to acquire data from the internal memory or from storage media inserted in the MEMORY HiCORDER.

You can even acquire data from the internal memory or from storage media connected to the MEMORY HiCORDER via USB.

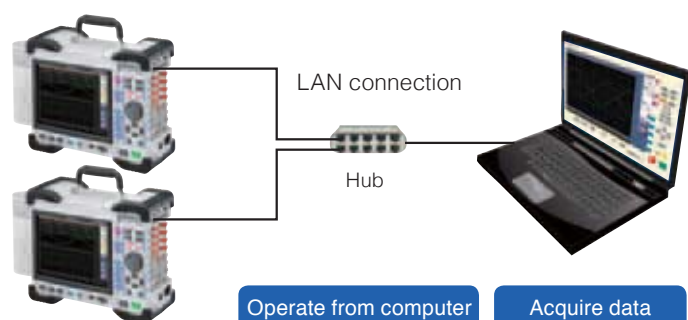

Record the data you need

Simultaneous recording on storage media


Memory functions

Recording method Sampling is done at the set period, and all data is recorded.

- Automatic data saving on SSD / CF card or USB memory stick
- During high-speed sampling, data is written to internal memory first and later saved on other media
- During low-speed sampling, data is written to internal memory while also saved on other media
- Highly effective for long-term recording

Maximum Recording Time to internal memory (excerpt)

		MR8847-51 (64 MW)	MR8847-52 (256 MW)	MR8847-53 (512 MW)
Maximum recording length fluctuates depending on number of channels used.		16 analog channels + 16 internal logic channels	16 analog channels + 16 internal logic channels	16 analog channels + 16 internal logic channels
Time axis	Sampling period	40 000 divisions	160 000 divisions	320 000 div
5 μ s/div	50 ns	0.2 s	0.8 s	1.6 s
10 μ s/div	100 ns	0.4 s	1.6 s	3.2 s
100 μ s/div	1 μ s	4 s	16 s	32 s
1 ms/div	10 μ s	40 s	2 min 40 s	5 min 20 s
100 ms/div	1 ms	1 h 06 min 40 s	4 h 26 min 40 s	8 h 53 min 20 s
1 s/div	10 ms	11 h 06 min 40 s	1 d 20 h 26 min 40 s	3 d 16 h 53 min 20 s
1 min/div	600 ms	27 d 18 h 40 min 00 s	111 d 02 h 40 min 00 s	222 d 05 h 20 min 00 s
5 min/div	3.0 s	138 d 21 h 20 min 00 s	555 d 13 h 20 min 00 s	1111 d 02 h 40 min 00 s

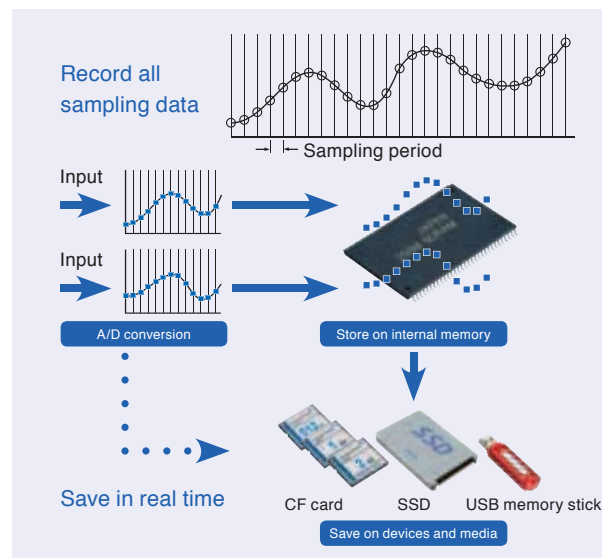


- Caution: Available recording duration is determined by internal RAM capacity, not by external media.
- Caution: Although USB memory sticks enable automatic data saving, for more reliable data protection, we recommend use of HIOKI CF cards, which are guaranteed to work with the instrument.
- Note: Table shows maximum values at arbitrary recording length settings.
- Note: Saving to media in near real-time is possible at sampling speeds of 100 ms/div (1 msec sampling) or slower.

Analysis software

WAVE PROCESSOR 9335

(Software sold separately)

- Waveform display, calculations
- Print function




9335 Brief Specifications

Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP
Functions	- Display functions: Waveform display, X-Y display, Cursor function, etc. - File loading: Readable data formats (.MEM, .REC, .RMS, .POW) / Maximum loadable file size: Maximum file size that can be saved by a given device (file size may be limited depending on the computer configuration) - Data conversion: Conversion to CSV format, Batch conversion of multiple files, etc.
Printing	- Print function: Printing image file output (expanded META type, *.EMF*) - Print formatting: 1 up, 2-to-16 up, 2-to-16 rows, X-Y 1-to-4 up, preview, hard copy

LAN COMMUNICATOR 9333

(Software sold separately)

- Auto-save waveform data to PC
- Remote control via LAN connection
- Save in CSV format and transfer to spreadsheet programs



9333 Brief Specifications

Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP, (9333 ver.1.09 or later)
Functions	- Auto-saves waveform data to PC, Remote control of Memory HiCorder (by sending key codes and receiving images on screen), print report, print images from the screen, receive waveform data in same format as waveform files from the Memory HiCorder (binary only) - Waveform data acquisition: Accept auto-saves from the Memory HiCorder, same format as auto-save files of Memory HiCorder (binary only), print automatically with a Memory HiCorder from a PC. The Memory HiCorder's print key launches printouts on the PC - Waveform viewer: Simple display of waveform files, conversion to CSV format, etc.

Chart recording without missing transient events

Recorder functions


Recording method

Sampling is done at the set period, and data other than the maximum and minimum values is thinned out for recording.

- High-speed sampling ensures that transient events are captured also with slow recording
- Data compression achieved by recording maximum/minimum value pairs
- Max. 833-day (1 hr/div) long-term recording even for 64 MW model
- Continuous recording until paper runs out for chart output

Maximum Recording Time with the Recorder function

REC time axis	Sampling period	To internal memory 20000 divisions	Continuous (approx. recording time with 30 m paper roll) <small>*Calculated as 30 m = 2,970 divisions *Changing paper enables semi-permanent continuation of recording.</small>
100 ms/div		33 min 20 s	Display only
200 ms/div		1 h 6 min 40 s	Display only
500 ms/div		2 h 46 min 40 s	24 min 45 s
1 s/div	1 μs, 10 μs,	5 h 33 min 20 s	49 min 30 s
2 s/div	100 μs,	11 h 6 min 40 s	1 h 39 min 00 s
5 s/div	1 ms, 10 ms,	1 d 3 h 46 min 40 s	4 h 7 min 30 s
10 s/div	100 ms	2 d 7 h 33 min 20 s	8 h 15 min 00 s
30 s/div		6 d 22 h 40 min 00 s	24 h 45 min 00 s
50 s/div	* Limited by combination of selections under	11 d 13 h 46 min 40 s	1 d 17 h 15 min 00 s
100 s/div	1/100 on time axis and time axis setting for memory recording	23 d 3 h 33 min 20 s	3 d 10 h 30 min 00 s
1 min/div		13 d 21 h 20 min 00 s	2 d 1 h 30 min 00 s
2 min/div		27 d 18 h 40 min 00 s	4 d 3 h 00 min 00 s
5 min/div		69 d 10 h 40 min 00 s	10 d 7 h 30 min 00 s
10 min/div		138 d 21 h 20 min 00 s	20 d 15 h 00 min 00 s
30 min/div		416 d 16 h 00 min 00 s	61 d 21 h 00 min 00 s
1 hr/div		833 d 8 h 00 min 00 s	123 d 18 h 00 min 00 s

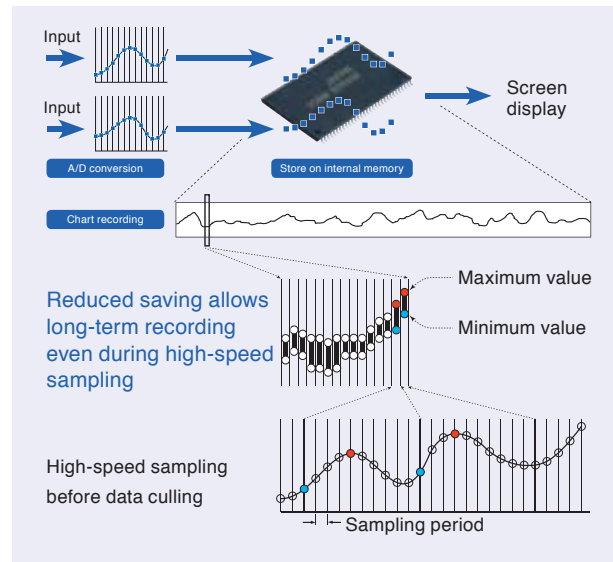

- Notes
- When opening data created with the Recorder function on a computer, the maximum and minimum data pairs are lined up in a time series.
 - Length of printer paper roll is 30 meters. Paper can be changed during operation without stopping the recording process.
 - With settings between 100 ms and 200 ms/div on the time axis, continuous recording is not possible if printer is ON.
 - The table shows values for the MR8847-51 (64 M-words memory capacity). Model MR8847-52 (256 MW) can record four times and Model MR8847-53 (512 MW) eight times as much. At "Continuous" setting in recording length, total recording time cannot be increased.

iPad App for Memory HiCorder HMR Terminal

Free app (exclusively for iPad) downloadable from the App Store

- Freely control waveforms using iPad's gesture controls
- Fingertip operation of Max. 32 channels of waveform data
- Operate the Memory HiCorder via network
You can change settings, and monitor waveforms during measurement.
*New function on Ver 2.0



■ Data can view by the iPad using Hioki's dedicated apps available from the App Store. Search for "HIOKI" and download the "HMR Terminal" app.



*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.
*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.
*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.
*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.


■ HMR Terminal Brief specifications (free software)

Operating environment	iOS on the iPad (Apple Inc.)
Functions	- Data acquisition: Send to iPad via FTP using a WiFi router, or load to iPad via iTunes (PC app) - Intuitively operate waveform level searches, maximum / minimum / average values, zero position adjustment, and more at your fingertips - Waveform monitoring - Meter setting * Logic waveforms and computational waveforms are not supported.

Wave Viewer Wv

(Bundled software)

- Check waveforms with binary data on a PC
- Save data in CSV format and transfer to spreadsheet programs




■ Wave Viewer (Wv) Brief Specifications

Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP
Functions	- Simple display of waveform files - Convert binary data files to text format, CSV, etc. - Scroll function, enlarge/reduce display, jump to cursor/trigger position, etc.

Definitive analysis of important data

Calculate parameter values from measured waveforms

The MR8847A can perform 24 calculations, including RMS, peak value, and maximum value, from measured waveforms. It can also perform time difference measurements, histogram measurements, phase difference measurements, histogram measurements for HIGH level and LOW level, and statistical processing. Calculation results are displayed together on the waveform observation screen.

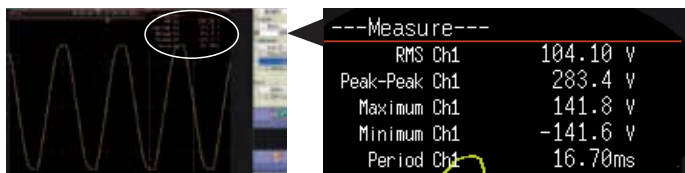

Process waveforms with formulas


If you know the required formulas, you can also perform complicated calculations. By entering formulas, you can perform a variety of calculations even after measurements are complete. For example, you can make the settings shown on the right to find the RMS value from a measured waveform.

$$RMS = \sqrt{\frac{1}{n} \sum_{i=1}^n d_i^2}$$

RMS = RMS value
 n = Data number
 di = Data for channel i

```
Z1 = SQR(MOV(CH2*CH2,500))
```

Enter formula

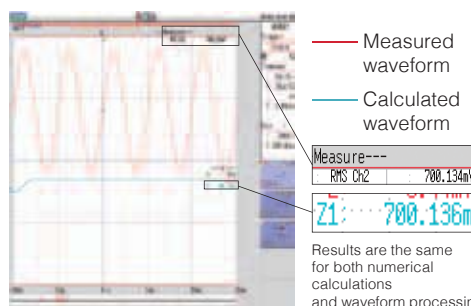


FFT analysis function

The MR8847A can perform one-signal FFT for analyzing frequency components, two-signal FFT for analyzing transfer functions, and octave analysis for acoustics.


FFT calculations from memory waveforms

When performing FFT analysis of data measured with the memory function, you can use the jog shuttle to specify analysis points while also viewing the calculation results at the same time. You can also display both the raw data measured with the memory function and the calculation results for storage waveforms at the same time, which improves operability during analysis by displaying spectrum waveforms while checking the results of window functions.

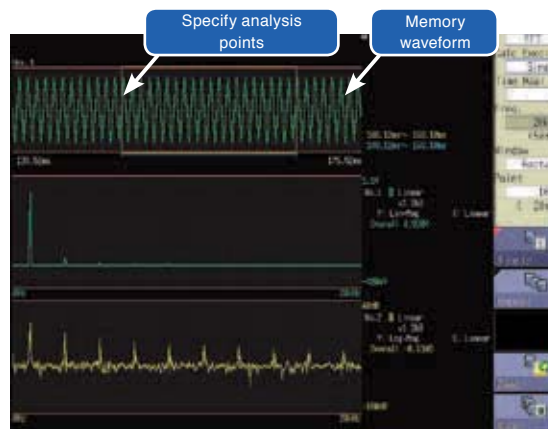


Display the calculation source (memory waveform) and FFT calculation results at the same time

Running spectrum display

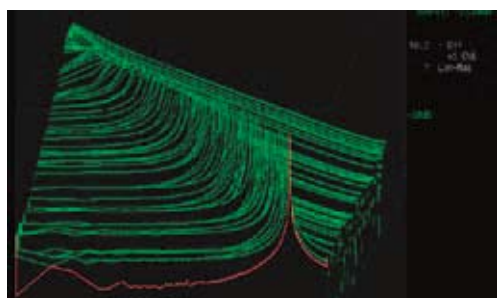


Display the spectrum as it changes over time in 3D

Change the number of calculation points after measurement

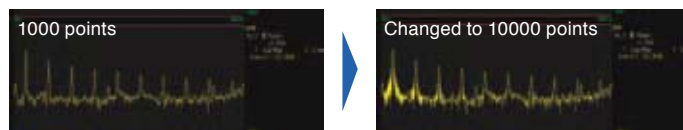

Scaling by "dB"

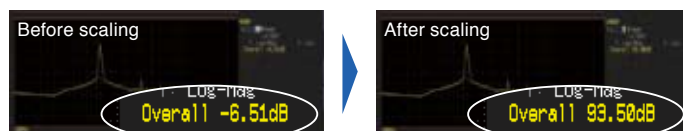

X-Y RECORDER


Now even easier to use with independent pen up/down control. Saving data in chronological order allows records to be saved as digital data, rather than paper hardcopies that need to be stored.

Pen up/down control


Pen up/down during X-Y recording is controlled independently. Press the function button or use an external control terminal (EXT. IN 1, 2, 3) for external control.

Replaces mechanical pen recorders

Use pen up/down control to record only the required data. This allows you to reduce the amount of unnecessary data that is recorded, and lower the running cost for paper.

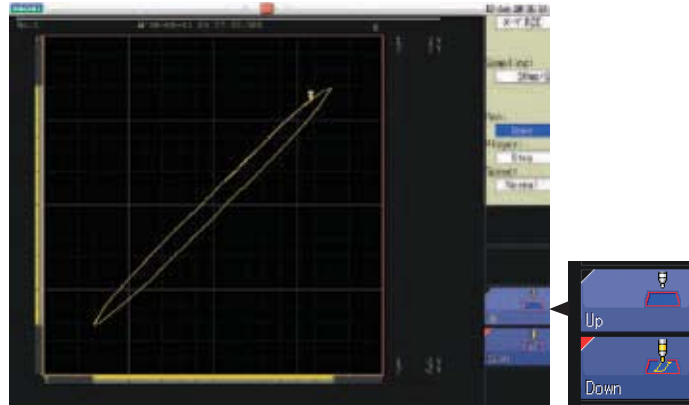

Pen up/down while recording X-Y waveforms

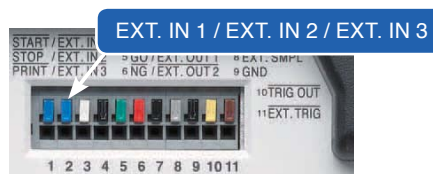

Control terminals

Determine waveform quality

Use the waveform judgment function, which monitors whether a waveform extends beyond the given area, to easily determine the quality of signal waveforms that are normally difficult to judge.

For time axis ranges that are slower than 100 msec/div, you can even make judgments while loading waveforms. This allows you to take the appropriate action the moment a poor waveform is detected on the production line. You can stop the line as soon as an abnormality is detected.

Judge FFT analysis waveforms


Judge FFT analysis waveforms in the same way.

Judge X-Y waveforms

In addition to time axis signals, the MR8847A also has a waveform judgment function for X-Y waveforms built in. Use this to detect:


- Displacement and pressure of presses
- Pressure and flow rate of pumps

The X-Y waveforms of the above and other data can be tested automatically based on area judgment.

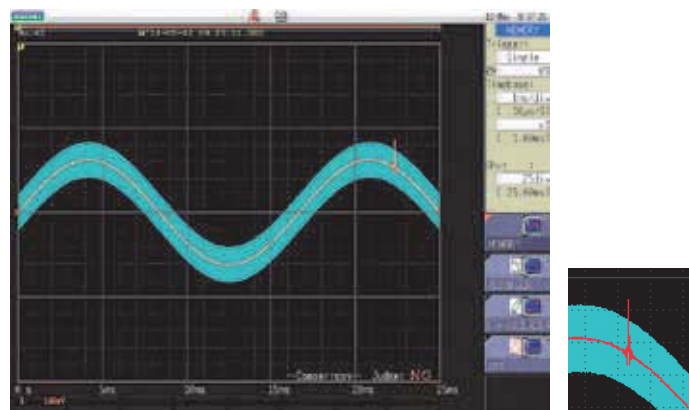

Judge waveform quality by area

Judgment: Poor

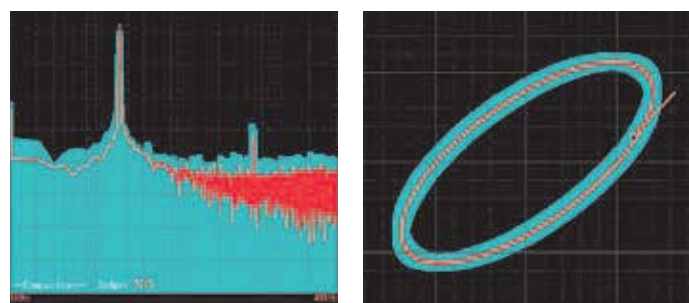

Judge FFT analysis waveforms and X-Y waveforms by area

Product Specifications

Basic specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	MEMORY (high-speed recording), RECORDER (real-time recording) X-Y RECORDER, FFT
Number of input units	[8 analog input modules]: 16 analog channels + 16 logic channels (built-in) [5 analog input modules + 3 logic input modules]: 10 analog channels + 64 logic channels (16 built-in channels + 48 channels in logic input modules) * For analog units, channels are isolated from each other and from frame GND. For logic units and internal standard logic terminals, all channels have a common ground.
Max. sampling speed	20 MS/second (50 ns period, all channels simultaneously) External sampling (10 MS/second, 100 ns period)
Memory capacity	MR8847-51: Total 64 M-words (Memory expansion: none) 32 MW/ch (using 2 Analog channels), to 4 MW/ch (using 16 Analog channels) MR8847-52: Total 256 M-words (Memory expansion: none) 128 MW/ch (using 2 Analog channels), to 16 MW/ch (using 16 Analog channels) MR8847-53: Total 512 M-words (Memory expansion: none) 256 MW/ch (using 2 Analog channels), to 32 MW/ch (using 16 Analog channels)
Removable storage	CF card slot (standard) × 1 (up to 2GB, FAT, or FAT-32 format), SSD (128 GB, optional), USB memory stick (USB 2.0)
Backup function (At 25°C/ 77°F)	Clock and parameter setting backup: at least 10 years, Waveform backup function: none
Control terminals	External trigger input, Trigger output, External sampling input, Two external outputs (GO, NG), Three external inputs (START, STOP, PRINT)
External interface	LAN: 100BASE-TX (FTP server, HTTP server) USB: USB2.0 compliant, series A receptacle ×1, series B receptacle ×1, (File transfer internal drive/CF card to PC, or remote control from PC)
Environmental conditions (no condensation)	Operation: -10°C to 40°C (14°F to 104°F), 20% to 80% RH With printer and/or SSD in use: 0°C to 40°C (32°F to 104°F), 20% to 80% RH Storage: -20°C to 50°C (-4°F to 122°F), 90% RH or less
Compliance standard	Safety: EN61010 EMC: EN61326, EN61000-3-2, EN61000-3-3
Power supply	100 to 240 V AC, 50/60 Hz 10 to 28 V DC (use the DC POWER UNIT 9784: Factory installation only)
Power consumption	130 VA max. (Printer not used), 220 VA max. (Printer used)
Dimensions and mass	Approx. 351 mm (13.82 in) W × 261 mm (10.28 in) H × 140 mm (5.51 in) D, 7.6 kg (268.1 oz) (main unit only)
Accessories	Instruction Manual ×1, Measurement Guide ×1, Application Disk (Waveform Maker Software SF8000, Wave Viewer Wv, Communication Commands table) ×1, Power cord ×1, Input cord label ×1, USB cable ×1, Printer paper ×1, Roll paper attachment ×2, Ferrite clamp ×1
Internal printer	
Features	Printer paper one-touch loading, high-speed thermal printing
Recording Paper	216 mm (8.50 in) × 30 mm (98.43 ft), thermal paper roll (use 9231 paper) Waveform section recording width: 200 mm (7.87 in) 20 division full scale, 1 div = 10 mm (0.39 in) 80 dots
Recording speed	Max. 50 mm (1.97 in)/sec
Paper feed density	10 dots/mm
Display	
Display section	10.4 inch SVGA-TFT color LCD (800 × 600 dots) (Time axis 25 div × Voltage axis 20 div, X-Y waveform 20 div × 20 div)
Display languages	English, Japanese, Korean, Chinese
Waveform display zoom/compression	Time axis: x10 to x2 (zoom at MEMORY function only), x1, x1/2 to x1/20 000 Voltage axis: x100 to x2, x1, x1/2 to x1/10
Variable display	Upper/Lower limit set, display/div set
Scaling	10:1 to 1000:1, automatic scaling for various probes Manual scaling (conversion ratio setting, 2-point setting, unit setting)
Comment entry	Alphanumeric input (title, analog and logic channels), Simple input, history input, phrase input
Logic waveform	Display point move 1% step, Line width 3 types
Display partition	Max. 16 graphs
Monitor functions	- Level monitor - Numerical value (sampling 10 kS/s fixed, refresh rate 0.5 s)
Other display functions	- Waveform inversion (positive/negative) - Cursor measurement (A, B, 2-cursor, for all channels) - Vernier function (amplitude fine adjustment) - Zoom function (horizontal screen division, zoomed waveform shown in lower section) - 16 selectable colors for waveform display - Zero position shift in 1% steps for analog waveform - Global zero adjust for all channels and all ranges

MEMORY (High-speed recording)	
Time axis	5 μs to 5 min/div (100 samples/div) 26 ranges, External sampling (100 samples/div, or free setting), Time axis zoom: x2 to x10 in 3 stages, compression: 1/2 to 1/200 000 in 16 stages
Sampling period	1/100 of time axis range (minimum 50 ns period)
Recording length	MR8847-51: 16 ch mode: 25 to 20 000 div, 2 ch mode: 25 to 200 000 div (built-in presets) or arbitrary setting in 1-div steps (max. 320 000 div) MR8847-52: 16 ch mode: 25 to 100 000 div, 2 ch mode: 25 to 1 000 000 div (built-in presets) or arbitrary setting in 1-div steps (max. 1 280 000 div) MR8847-53: 16 ch mode: 25 to 200 000 div, 2 ch mode: 25 to 2 000 000 div (built-in presets) or arbitrary setting in 1-div steps (max. 2 560 000 div)
Pre-trigger	Record data from before the trigger point at 0 to +100% or -95% of the recording length in 15 stages, or in 1 div step settings
Numerical calculations	- Simultaneous calculation for up to 16 selected channels Average value, effective (rms) value, peak to peak value, maximum value, time to maximum value, minimum value, time to minimum value, period, frequency, rise time, fall time, standard deviation, area value, X-Y area value, specified level time, specified time level, pulse width, duty ratio, pulse count, four arithmetic operations, time difference, phase difference, high-level and low-level - Calculation result evaluation output: GO/NG (with open-collector 5 V output) - Automatic saving of calculation results
Waveform processing	- For up to 16 freely selectable channels, the following functions can be performed (results are automatically stored): Automatic saving of four arithmetic operations, absolute value, exponentiation, common logarithm, square root, moving average, differentiation (primary, secondary), integration (primary, secondary), parallel displacement along time axis, trigonometric functions, reverse trigonometric functions, calculation results
Memory segmentation	- Max. 1024 blocks, sequential storage, multi-block storage
Other	- No logging - X-Y waveform synthesis (1-screen, 4-screens) - Overlay (always overlay when started/overlay only required waveforms) - Automatic/ Manual/ A-B cursor range printing/ Report printing
RECORDER (Real-time recording)	
Time axis	10 ms to 1 hour/div, 19 ranges, time axis resolution 100 points/div * Out of data acquired at selected sampling rate, only maximum and minimum value data determined using 100 points/div units are stored. Time axis compression selectable in 14 steps, from ×1/2 to ×1/50 000
Sampling period	1/10/100 μs, 1/10/100 ms (selectable from 1/100 or less of time axis)
Real-time printing	Supported * Real-time printing is possible at time axis settings slower than 500 ms/div * Delayed print is performed when recording length is not set to "Continuous" and time axis setting is 10 ms to 200 ms/div * When recording length is set to "Continuous" and time axis setting is 10 ms to 200 ms/div, manual printing can be performed after measurement stop
Recording length	MR8847-51: Built-in presets of 25 to 20 000 div, or "Continuous" or arbitrary setting in 1-div steps (max. 20 000 div) MR8847-52: Built-in presets of 25 to 50 000 div, or "Continuous" or arbitrary setting in 1-div steps (max. 80 000 div) MR8847-53: Built-in presets of 25 to 100 000 div, or "Continuous" or arbitrary setting in 1-div steps (max. 160 000 div)
Additional recording	Supported (recording is resumed without overwriting previous data)
Waveform memory	MR8847-51: Store data for most recent 20 000 div in memory MR8847-52: Store data for most recent 80 000 div in memory MR8847-53: Store data for most recent 160 000 div in memory * Backward scrolling and re-printing available
Auto saving	Data are automatically saved on CF card, USB memory stick or internal drive after measurement stops.
Other	- No logging - Manual/ A-B cursor range printing/ Report printing
X-Y RECORDER (X-Y real-time recording)	
Sampling period	1/10/100 ms (dot), 10/100 ms (line)
Recording length	Continuous
Screen, Printing	Split screen (1 or 4), Manual printing only
Number of X-Y	1 to 8 phenomena
X-Y channel setting	Any 8 channels out of 16 can be selected for X axis and Y axis respectively
X-Y axis resolution	25 dots/div (screen), horizontal 80 dots/div × vertical 80 dots/div (printer)
Waveform memory	Sampling data for last 4 000 000 points are stored in memory
Pen up/down	Simultaneous for all phenomena
External pen control	Possible via external input connector (simultaneous up/down for all phenomena)

Trigger functions	
Trigger mode	MEMORY (high-speed recording), FFT: Single, Repeat, Auto RECORDER (real-time recording): Single, Repeat
Trigger source	CH1 to CH16 (analog), Standard Logic 16ch + Logic Unit (Max. 3 units 48 channels), External (a rise of 2.5V or terminal short circuit), Timer, Manual (either ON or OFF for each source), Logical AND/OR of sources
Trigger types	- Level: Triggering occurs when preset voltage level is crossed (upwards or downwards) - Voltage drop: Triggering occurs when voltage drops below peak voltage setting (for 50/60 Hz commercial power supply only) - Window: Triggering occurs when window defined by upper and lower limit is entered or exited - Period: Rising edge or falling edge cycle of preset voltage value is measured and triggering occurs when defined cycle range is exceeded - Glitch: Triggering occurs when pulse width from rising or falling edge of preset voltage value is under run - Event setting: Event count is performed for each source, and triggering occurs when a preset count is exceeded - Logic: 1, 0, or ×, Pattern setting
Level setting resolution	0.1% of full scale (full scale = 20 divisions)
Trigger filter	Selectable 0.1 div to 10.0 div, or OFF (high-speed recording) ON (10 ms fixed) or OFF (at RECORDER function)
Trigger output	Open collector (5 voltage output, active Low) At Level setting: pulse width (Sampling period × data number after trigger) At Pulse setting: pulse width (2 ms)
Other functions	Trigger priority (OFF/ON), Pre-trigger function for capturing data from before / after trigger event (at MEMORY function), Level display during trigger standby, Start and stop trigger (at RECORDER function), Trigger search function

Other	
Waveform judgment function (In MEMORY or FFT function)	- Area comparison with reference waveform area for time domain waveform, X-Y waveform, or FFT analysis waveform - Parameter calculated value comparison with reference value - Output: GO/NG decision, Open-collector 5V, *100 msec/div (1 msec sampling) and thereafter allows for evaluation in almost real-time.
FFT function	
Analysis mode	Storage waveform, Linear spectrum, RMS spectrum, Power spectrum, Density of power spectrum, Cross power spectrum, Auto-correlation function, Histogram, Transfer function, Cross-correlation function, Impulse response, Coherence function, 1/1 Octave analysis, 1/3 Octave analysis, LPC analysis, Phase spectrum
Analysis channels	Selectable from all analog input channels
Frequency range	133 mHz to 8 MHz, External (resolution 1/400, 1/800, 1/2000, 1/4000)
Number of sampling points	1000, 2000, 5000, 10 000 points
Window functions	Rectangular, Hanning, Hamming, Blackman, Blackman-Harris, Flat-top, Exponential
Display format	Single, Dual, Nyquist, Running spectrum
Averaging function	Time axis / frequency axis simple averaging, Exponential averaging, Peak hold (frequency axis), Averaging times: 2 times to 10000 times
Print functions	Same as the MEMORY function (partial print not available)

- Maximum Internal Memory Recording Time (MEMORY Function)

		MR8847-51 (64 MW)		MR8847-52 (256 MW)		MR8847-53 (512 MW)	
		Analog 16 ch + internal Logic 16 ch	Analog 2 ch + internal Logic 16 ch	Analog 16 ch + internal Logic 16 ch	Analog 2 ch + internal Logic 16 ch	Analog 16 ch + internal Logic 16 ch	Analog 2 ch + internal Logic 16 ch
Time axis	Sampling period	40 000 divisions	320 000 div	160 000 divisions	1 280 000 divisions	320 000 div	2 560 000 divisions
5 µs/div	50 ns	0.2 s	1.6 s	0.8 s	6.4 s	1.6 s	12.8 s
10 µs/div	100 ns	0.4 s	3.2 s	1.6 s	12.8 s	3.2 s	25.6 s
20 µs/div	200 ns	0.8 s	6.4 s	3.2 s	25.6 s	6.4 s	51.2 s
50 µs/div	500 ns	2 s	16 s	8 s	1 min 04 s	16 s	2 min 08 s
100 µs/div	1 µs	4 s	32 s	16 s	2 min 08 s	32 s	4 min 16 s
200 µs/div	2 µs	8 s	1 min 04 s	32 s	4 min 16 s	1 min 04 s	8 min 32 s
500 µs/div	5 µs	20 s	2 min 40 s	1 min 20 s	10 min 40 s	2 min 40 s	21 min 20 s
1 ms/div	10 µs	40 s	5 min 20 s	2 min 40 s	21 min 20 s	5 min 20 s	42 min 40 s
2 ms/div	20 µs	1 min 20 s	10 min 40 s	5 min 20 s	42 min 40 s	10 min 40 s	1 h 25 min 20 s
5 ms/div	50 µs	3 min 20 s	26 min 40 s	13 min 20 s	1 h 46 min 40 s	26 min 40 s	3 h 33 min 20 s
10 ms/div	100 µs	6 min 40 s	53 min 20 s	26 min 40 s	3 h 33 min 20 s	53 min 20 s	7 h 06 min 40 s
20 ms/div	200 µs	13 min 20 s	1 h 46 min 40 s	53 min 20 s	7 h 06 min 40 s	1 h 46 min 40 s	14 h 13 min 20 s
50 ms/div	500 µs	33 min 20 s	4 h 26 min 40 s	2 h 13 min 20 s	17 h 46 min 40 s	4 h 26 min 40 s	35 h 33 min 20 s
100 ms/div	1 ms	1 h 06 min 40 s	8 h 53 min 20 s	4 h 26 min 40 s	1 d 11 h 33 min 20 s	8 h 53 min 20 s	2 d 23 h 06 min 40 s
200 ms/div	2 ms	2 h 13 min 20 s	17 h 46 min 40 s	8 h 53 min 20 s	2 d 23 h 06 min 40 s	17 h 46 min 40 s	5 d 22 h 13 min 20 s
500 ms/div	5 ms	5 h 33 min 20 s	1 d 20 h 26 min 40 s	22 h 13 min 20 s	7 d 09 h 46 min 40 s	44 h 26 min 40 s	14 d 19 h 33 min 20 s
1 s/div	10 ms	11 h 06 min 40 s	3 d 16 h 53 min 20 s	1 d 20 h 26 min 40 s	14 d 19 h 33 min 20 s	3 d 16 h 53 min 20 s	29 d 15 h 06 min 40 s
2 s/div	20 ms	22 h 13 min 20 s	7 d 09 h 46 min 40 s	3 d 16 h 53 min 20 s	29 d 15 h 06 min 40 s	7 d 09 h 46 min 40 s	59 d 06 h 13 min 20 s
5 s/div	50 ms	2 d 07 h 33 min 20 s	18 d 12 h 26 min 40 s	9 d 06 h 13 min 20 s	74 d 01 h 46 min 40 s	18 d 12 h 26 min 40 s	148 d 03 h 33 min 20 s
10 s/div	100 ms	4 d 15 h 06 min 40 s	37 d 00 h 53 min 20 s	18 d 12 h 06 min 40 s	148 d 03 h 33 min 20 s	37 d 00 h 53 min 20 s	296 d 07 h 06 min 40 s
30 s/div	300 ms	13 d 21 h 20 min 00 s	111 d 02 h 40 min 00 s	55 d 13 h 20 min 00 s	444 d 10 h 40 min 00 s	111 d 02 h 40 min 00 s	888 d 21 h 20 min 00 s
50 s/div	500 ms	23 d 03 h 33 min 20 s	185 d 04 h 26 min 40 s	92 d 14 h 13 min 20 s	740 d 17 h 46 min 40 s	185 d 04 h 26 min 40 s	"H"
1 min/div	600 ms	27 d 18 h 40 min 00 s	222 d 05 h 20 min 00 s	111 d 02 h 40 min 00 s	888 d 21 h 20 min 00 s	222 d 05 h 20 min 00 s	"H"
100 s/div	1.0 s	46 d 07 h 06 min 40 s	370 d 08 h 53 min 20 s	185 d 04 h 26 min 40 s	"H"	370 d 08 h 53 min 20 s	"H"
2 min/div	1.2 s	55 d 13 h 20 min 00 s	444 d 10 h 40 min 00 s	222 d 05 h 20 min 00 s	"H"	444 d 10 h 40 min 00 s	"H"
5 min/div	3.0 s	138 d 21 h 20 min 00 s	"H"	555 d 13 h 20 min 00 s	"H"	"H"	"H"

Notes

- The above table shows maximum values at arbitrary recording length settings.
- Saving to media in near real-time is possible at sampling speeds of 100 ms/div (1 msec sampling) or slower.
- Operation cannot be guaranteed for extended recording periods one year or longer. The above table represents theoretical values.

- Measurement Indices (Input units sold separately)

Measurement targets	With use input unit	Display range	Max. resolution
Voltage	ANALOG UNIT 8966	100 mV f.s. to 400 V f.s.	50 µV
	HIGH RESOLUTION UNIT 8968	100 mV f.s. to 400 V f.s.	3.125 µV
	DC/RMS UNIT 8972	100 mV f.s. to 400 V f.s.	50 µV
	HIGH-VOLTAGE UNIT U8974	4 V f.s. to 1000 V f.s.	0.125 mV
Current	CURRENT UNIT 8971 + optional current sensor	20 A f.s. or larger When driving current sensors with separate power supply, measurement can be conducted with voltage input units.	1 mA or larger
RMS AC voltage	DC/RMS UNIT 8972	100 mV f.s. to 400 V f.s.	50 µV
Temperature (Thermocouple input)	TEMP UNIT 8967	200°C (392°F) f.s. to 2000°C (3632°F) f.s. Note: Upper and lower limit values depend on the thermocouple	0.01°C (0.02°F)
Frequency, RPM	FREQ UNIT 8970	20 Hz f.s. to 100 kHz f.s. 2 (kr/min) f.s. to 2000 (kr/min) f.s.	2 mHz 0.2 (r/min)
Power supply frequency	FREQ UNIT 8970	40 to 60 Hz, 50 to 70 Hz, 390 to 410 Hz	0.01 Hz
Integration count	FREQ UNIT 8970	40 k-counts f.s. to 20 M-counts f.s.	1 count
Pulse duty ratio	FREQ UNIT 8970	100% f.s.	0.01%
Pulse width	FREQ UNIT 8970	0.01 s f.s. to 2 s f.s.	1 µs
Vibration stress	STRAIN UNIT U8969	400 µε f.s. to 20000 µε f.s.	0.016 µε
Relay contacts, voltage on/off	LOGIC UNIT 8973	—	—

Notes

- Each unit has two input channels, except Logic Unit.
- Besides logic units (16 channels), the MR8847A series comes standard with 16 logic inputs integrated in the device.

Optional Specifications (sold separately)

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



ANALOG UNIT 8966 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF). Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5 k/50 k/500 kHz
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	20 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% of full scale (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 5 MHz -3 dB, (with AC coupling: 7 Hz to 5 MHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 204.5 mm (8.05 in) D, approx. 240 g (8.5 oz)
Accessories: Ferrite clamp x 2



TEMP UNIT 8967 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for temperature measurement with thermocouple (voltage measurement not available)
Input terminals	Thermocouple input: plug-in connector, Recommended wire diameter: single-wire, 0.14 to 1.5 mm ² , braided wire 0.14 to 1.0 mm ² (conductor wire diameter min. 0.18 mm), AWG 26 to 16 Input impedance: min. 5 MΩ (with line fault detection ON/OFF). Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Temperature measurement range	10°C (50°F)/div (-100°C to 200°C (-148°F to 392°F)), 50°C (122°F)/div (-200°C to 1000°C (-328°F to 1832°F)), 100°C (212°F)/div (-200°C to 2000°C (-328°F to 3632°F)), 3 ranges, full scale: 20 div, Measurement resolution: 1/1000 of measurement range (using 16-bit A/D conversion)
Thermocouple range (JIS C 1602-1995) (ASTM E-988-96)	K: -200°C to 1350°C (-328°F to 2462°F), J: -200°C to 1100°C (-328°F to 2012°F), E: -200°C to 800°C (-328°F to 1472°F), T: -200°C to 400°C (-328°F to 752°F), N: -200°C to 1300°C (-328°F to 2372°F), R: 0°C to 1700°C (32°F to 3092°F), S: 0°C to 1700°C (32°F to 3092°F), B: 400°C to 1800°C (752°F to 3272°F), W (WRe5-26): 0°C to 2000°C (32°F to 3632°F). Reference junction compensation: internal/external (switchable), Line fault detection ON/OFF possible
Data refresh rate	3 methods, Fast: 1.2 ms (digital filter OFF), Normal: 100 ms (digital filter 50/60 Hz), Slow: 500 ms (digital filter 10 Hz)
Measurement accuracy	Thermocouple K, J, E, T, N: ±0.1% of full scale ±1°C (±1.8°F) (±0.1% of full scale ±2°C (±3.6°F) at -200°C to 0°C (-328°F to 32°F)), Thermocouple R, S, B, W: ±0.1% of full scale ±3.5°C (±6.3°F) (at 0°C (32°F) to less than 400°C (752°F)); However, no accuracy guarantee of less than 400°C (752°F) for B), ±0.1% f.s. ±3°C (±5.4°F) (at 400°C (752°F) or more) Reference junction compensation accuracy: ±1.5°C (±2.7°F) (added to measurement accuracy with internal reference junction compensation)

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



HIGH RESOLUTION UNIT 8968 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF). Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5k/50k Hz
Anti-aliasing filter	Integrated filter for suppressing aliasing distortion caused by FFT processing (automatic cutoff frequency setting/OFF)
Measurement resolution	1/1600 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.3% of full scale (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 100 kHz -3 dB (with AC coupling: 7 Hz to 100 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 245 g (8.6 oz)
Accessories: Conversion cable L9769 x 2 (cable length 60 cm/1.97 ft)



STRAIN UNIT U8969 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less, after 30 minutes of warm-up time and auto-balance; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for distortion measurement (electronic auto-balancing, balance adjustment range within ±10 000 μe or less)
Input terminals	NDIS connector EPRC07-R9FNDIS (via Conversion Cable L9769, NDIS connector PRC03-12A10-7M10.5) Max. rated voltage to ground: 30 V rms or 60 V DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Suitable transducer	Strain gauge converter, Bridge impedance: 120 Ω to 1 kΩ, Bridge voltage: 2 V ±0.05 V, Gauge rate: 2.0
Measurement range	20 μe to 1000 μe/div, 6 ranges, full scale: 20 div, Low-pass filter: 5/10/100 Hz, 1 kHz
Measurement resolution	1/1250 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	200 kS/s (simultaneous sampling across 2 channels)
Measurement accuracy After auto-balancing	±0.5% f.s. ±4 μe (5 Hz filter ON)
Frequency characteristics	DC to 20 kHz +1/-3 dB

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



FREQ UNIT 8970 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for voltage input based frequency measurement, rotation, power frequency, integration, pulse duty ratio, pulse width
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF). Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Frequency mode	Range: Between DC to 100 kHz (minimum pulse width 2 μs), 1 Hz/div to 5 kHz/div (full scale = 20 div), 8 settings Accuracy: ±0.1% f.s. (exclude 5 kHz/div), ±0.7% f.s. (at 5 kHz/div)
Rotation mode	Range: Between 0 to 2 million rotations/minute (minimum pulse width 2 μs), 100 (r/min)/div to 100 k (r/min)/div (full scale = 20 div), 7 settings Accuracy: ±0.1% f.s. (excluding 100 k (r/min)/div), ±0.7% f.s. (at 100 k (r/min)/div)
Power frequency mode	Range: 50 Hz (40 to 60 Hz), 60 Hz (50 to 70 Hz), 400 Hz (390 to 410 Hz) (full scale = 20 div), 3 settings Accuracy: ±0.03 Hz (50, 60 Hz), ±0.1 Hz (400 Hz range)
Integration mode	Range: 2 k counts/div to 1 M counts/div, 6 settings Accuracy: ±range/2000
Duty ratio mode	Range: Between 10 Hz to 100 kHz (minimum pulse width 2 μs), 5%/div (full scale = 20 div) Accuracy: ±1% (10 Hz to 10 kHz), ±4% (10 kHz to 100 kHz)
Pulse width mode	Range: Between 2 μs to 2 sec, 500 μs/div to 100 ms/div (full scale = 20 div), Accuracy: ±0.1% f.s.
Measurement resolution	1/2000 of range (Integration mode), 1/500 of range (exclude integration, power frequency mode), 1/100 of range (power frequency mode)
Input voltage range and threshold level	±10 V to ±400 V, 6 settings, selectable threshold level at each range
Other functions	Slope, Level, Hold, Smoothing, Low-pass filter, Switchable DC/AC input coupling, Frequency dividing, Integration over-range keep/return

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: CONVERSION CABLE 9318 x 2 (To connect the current sensor to the 8971)



CURRENT UNIT 8971 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, Current measurement with optional current sensor,
Input terminals	Sensor connector (input impedance 1 MΩ, exclusive connector for current sensor via conversion cable the 9318, common GND with recorder)
Compatible current sensors	CT6863, CT6862, 9709, CT6841, CT6843, CT6844, CT6845, 9272-10 (To connect the 8971 via conversion cable the 9318)
Measurement range	Using 9272-10 (20 A), CT6841: 100 mA to 5 A/div (f.s. = 20 div, 6 settings) Using CT6862: 200 mA to 10 A/div (f.s. = 20 div, 6 settings) Using 9272-10 (200 A), CT6843, CT6863: 1 A to 50 A/div (f.s. = 20 div, 6 settings) Using CT6844, CT6845, 9709: 2 A to 100 A/div (f.s. = 20 div, 6 settings)
Measurement accuracy	±0.65% f.s. RMS amplitude accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 10 kHz) RMS response time: 100 ms (rise time from 0 to 90% of full scale), Crest factor: 2 Frequency characteristics: DC to 100 kHz, ±3 dB (with AC coupling: 7 Hz to 100 kHz)
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Other functions	Input coupling: AC/DC/GND, Low-pass filter: 5, 50, 500, 5 k, 50 kHz

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



DC/RMS UNIT 8972 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for voltage measurement, DC/RMS selectable
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF). Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5 k/100 kHz
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% of full scale (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS amplitude accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz), ±3% of full scale (1 kHz to 100 kHz) Response time: SLOW 5 s (rise time from 0 to 90% of full scale), MID 800 ms (rise time from 0 to 90% of full scale), FAST 100 ms (rise time from 0 to 90% of full scale), Crest factor: 2
Frequency characteristics	DC to 400 kHz -3 dB, (with AC coupling: 7 Hz to 400 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 190 g (6.7 oz)
Accessories: None



LOGIC UNIT 8973	
Measurement functions	Number of channels: 16 channels (4 ch/1 probe connector x 4 connectors)
Input terminals	Mini DIN connector (for HIOKI logic probes only), Compatible logic probes: 9320-01, 9327, MR9321-01

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 260 g (9.2 oz)
Accessories: None



DIGITAL VOLTMETER UNIT MR8990 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and calibration, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for DC voltage measurement
Input terminals	Banana input connectors (Input resistance: 100 MΩ or higher with 100 mV f.s. to 10 V f.s. range, otherwise 10 MΩ) Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	100 mV f.s. (5 mV/div) to 1000 V f.s. (50 V/div), 5 ranges, full scale: 20 div
Measurement resolution	1/50 000 of measurement range (using 24 bit ΔΣ modulation A/D)
Integration time	20 ms ×NPLC (during 50 Hz), 16.67 ms ×NPLC (during 60 Hz)
Response time	2 ms +2× integration time or less (rise - f.s. → + f.s., fall + f.s. → - f.s.)
Basic measurement accuracy	±0.01% rdg. ±0.0025% f.s. (at range of 1000 mV f.s.)
Maximum input voltage	500 V DC (maximum voltage that can be applied between input connectors without damage)

Note: Cannot use with legacy models of the 8847 or MR8847

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)
Accessories: None



HIGH-VOLTAGE UNIT U8974 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for voltage measurement, DC/RMS selectable Maximum rated voltage to ground: 1000 V AC or DC (CAT III), 600 V AC or DC (CAT IV)
Input terminals	Banana input terminal (Input impedance: 4 MΩ, Input capacitance: 5 pF)
Measurement range	200 mV, 500 mV, 1, 2, 5, 10, 20, 50 V/div (DC mode) 500 mV, 1, 2, 5, 10, 20, 50 V/div (RMS mode)
Measurement resolution	1/1600 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s
Measurement accuracy	±0.25% f.s. (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS accuracy: ±1.5% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 100 kHz) Response time: High speed 150 ms, Medium speed 500 ms, Low speed 2.5 s
Frequency characteristics	DC to 100 kHz -3 dB
Input coupling	DC / GND
Maximum input voltage	1000 V DC, 700 V AC

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



ARBITRARY WAVEFORM GENERATOR UNIT U8793 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less after 30 minutes or more of warm-up time, Power supply frequency range of resolved MEMORY RECORDER at 50 Hz/60 Hz ±2 Hz, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 2, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 33 V rms AC or 70 V DC
Output voltage range	-10 V to 15 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	10 mA (Allowable load resistance: 1.5 kΩ or more)
FG function	DC, Sine wave, Square wave, Pulse wave, Triangular wave, Ramp wave, Output frequency: 0 Hz to 100 kHz
Arbitrary waveform generator mode	Waveforms measured by MR8847A, etc., generated by Hioki Model 7075 or SF8000, CSV waveforms D/A refresh rate: 2 MHz (using 16-bit D/A)
Sweep function	Frequency, Amplitude, Offset, Duty (Pulse only)
Program function	Max. 128 steps (Number of loops for each step, Number of total loops)
Other	Self-test function (Voltage), External input/output control

Note: Cannot use with legacy models of the 8847 or MR8847

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)
Accessories: None



WAVEFORM GENERATOR UNIT MR8790 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less after 30 minutes of warm-up time, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 4, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 33 V rms AC or 70 V DC
Output voltage range	-10 V to 10 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	5 mA
Output function	DC, Sine wave (Output frequency range: 0 Hz to 20 kHz)
Accuracy	Amplitude accuracy: ±0.25% of setting ±2 mV p-p (1 Hz to 10 kHz) Offset accuracy: ±3 mV DC output accuracy: ±0.6 mV
Other	Self-test function (Voltage, Current)

Note: Cannot use with legacy models of the 8847 or MR8847

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)
Accessories: None



PULSE GENERATOR UNIT MR8791 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less with no condensation, Accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 8, Connector: D-sub, half-pitch, 50-pin Max. rated voltage to ground: 33 V rms AC or 70 V DC (between unit and output channels) Logic output/Open collector output
Output mode 1	Pattern output: Read frequency: 0 Hz to 120 kHz, 2048 logic patterns Pulse output: Frequency 0 Hz to 20 kHz, Duty 0.1% to 99.9%
Output mode 2	Logic output: Output voltage level: 0 V to 5 V (H level: 3.8 V or more, L level: 0.8 V or less) Open collector output: Absolute maximum rated voltage for collector/emitter: 50 V Overcurrent protection: 100 mA
Other	Self-test function

Note: Cannot use with legacy models of the 8847 or MR8847

Cable length and mass: Input side: 70 cm (2.30 ft), Output side: 1.5 m (4.92 ft), Approx. 170 g (6.0 oz)



DIFFERENTIAL PROBE P9000 <small>(Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement modes	P9000-01: For waveform monitor output, Frequency characteristics: DC to 100 kHz -3 dB P9000-02: Switches between waveform monitor output/AC effective value output Wave mode frequency characteristics: DC to 100 kHz -3 dB, RMS mode frequency characteristics: 30 Hz to 10 kHz, Response time: Rise 300 ms, Fall 600 ms
Division ratio	Switches between 1000:1, 100:1
DC output accuracy	±0.5% f.s. (f.s. = 1.0 V, division ratio 1000:1), (f.s. = 3.5 V, division ratio 100:1)
Effective value measurement accuracy	±1% f.s. (30 Hz to less than 1 kHz, sine wave), ±3% f.s. (1 kHz to 10 kHz, sine wave)
Input resistance/capacity	H-L: 10.5 MΩ, 5 pF or less (At 100 kHz)
Maximum input voltage	1000 V AC, DC
Maximum rated voltage to ground	1000 V AC, DC (CAT III)
Operating temperature range	-40°C to 80°C (-40°F to 176°F)
Power supply	(1) AC adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter), 0.9 VA (main unit only) (2) USB bus power (5 V DC, USB micro-B connector), 0.8 VA (3) External power source 2.7 V to 15 V DC, 1 VA
Accessories	Instruction manual x1, Alligator clip x2, Carrying case x1

Cable length and mass: Main unit cable 1.3 m (4.27 ft), input section cable 46 cm (1.51 ft), approx. 350 g (12.3 oz)



DIFFERENTIAL PROBE 9322 <small>(Accuracy guaranteed for 1 year)</small>	
Functions	For high-voltage floating measurement, power line surge noise detection, RMS rectified output measurement
DC mode	For waveform monitor output, Frequency characteristics: DC to 10 MHz (±3 dB), Amplitude accuracy: ±1% of full scale (at max. 1000 V DC), ±3% of full scale (at max. 2000 V DC) (full scale: 2000 V DC)
AC mode	For detection of power line surge noise, Frequency characteristics: 1 kHz to 10 MHz ±3 dB
RMS mode	DC/AC voltage RMS output detection, Frequency characteristics: DC, 40 Hz to 100 kHz, Response speed: 200 ms or less (400 V AC), Accuracy: ±1% of full scale (DC, 40 Hz to 1 kHz), ±4% of full scale (1 kHz to 100 kHz) (full scale: 1000 V AC)
Input	Input type: balanced differential input, Input impedance/capacitance: H-L 9 MΩ/10 pF, H/L-unit 4.5 MΩ/20 pF, Max. rated voltage to ground: when using grabber clip 1500 V AC/DC (CAT II), 600 V AC/DC (CAT III), when using alligator clip: 1000 V AC/DC (CAT II), 600 V AC/DC (CAT III)
Maximum input voltage	2000 V DC, 1000 V AC (CAT II), 600 V AC/DC (CAT III)
Output	Voltage divider for 1/1000 of input, BNC connectors (output switchable for 3 modes DC, AC, RMS)
Power supply	Any of the following: (1) AC Adapte 9418-15, (2) Power Cord 9248 with Probe Power Unit 9687, (3) Power Cord 9324 + Conversion Cable 9323 with HiCORDER Logic terminal, (4) Power Cord 9325 with F/V Unit 8940

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 30 cm (0.98 ft), approx. 150 g (5.3 oz)



Note: The unit-side plug of the 9320-01 and 9327 is different from the 9320.

LOGIC PROBE 9320-01/9327	
Functions	Detection of voltage signal or relay contact signal for High/Low state recording
Input	4 channels (common ground between unit and channels), digital/contact input, switchable (contact input can detect open-collector signals) Input resistance: 1 MΩ (with digital input, 0 to +5 V) 500 kΩ or more (with digital input, +5 to +50 V) Pull-up resistance: 2 kΩ (contact input: internally pulled up to +5 V)
Digital input threshold	1.4 V / 2.5 V / 4.0 V
Contact input detection resistance	1.4 V: 1.5 kΩ or higher (open) and 500 Ω or lower (short) 2.5 V: 3.5 kΩ or higher (open) and 1.5 kΩ or lower (short) 4.0 V: 25 kΩ or higher (open) and 8 kΩ or lower (short)
Response speed	9320-01: 500 ns or lower, 9327: detectable pulse width 100 ns or higher
Maximum input voltage	0 to +50 V DC (the maximum voltage that can be applied across input pins without damage)

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 1 m (3.28 ft), approx. 320 g (11.3 oz)



Note: The unit-side plug of the MR9321-01 is different from the MR9321.

LOGIC PROBE MR9321-01	
Functions	Detection of AC or DC relay drive signal for High/Low state recording Can also be used for power line interruption detection
Input	4 channels (isolated between unit and channels), HIGH/LOW range switching Input resistance: 100 kΩ or higher (HIGH range), 30 kΩ or higher (LOW range)
Output (H) detection	170 to 250 V AC, ±DC 70 to 250 V (HIGH range) 60 to 150 V AC, ±DC 20 to 150 V (LOW range)
Output (L) detection	0 to 30 V AC, ±DC 0 to 43 V (HIGH range) 0 to 10 V AC, ±DC 0 to 15 V (LOW range)
Response time	Rising edge 1 ms max., falling edge 3 ms max. (with HIGH range at 200 V DC, LOW range at 100 V DC)
Maximum input voltage	250 V rms (HIGH range), 150 V rms (LOW range) (the maximum voltage that can be applied across input pins without damage)

System Chart of Options

Model : MEMORY HiCORDER MR8847A

Model No. (Order Code) (Note)

MR8847-51	(MR8847A, 64MW memory, main unit only)
MR8847-52	(MR8847A, 256MW memory, main unit only)
MR8847-53	(MR8847A, 512MW memory, main unit only)

*Cannot operate alone, You must install other options



Note: Main unit MR8847A cannot operate alone.
You must install one or more optional input modules in the unit.

Factory-installed option A *Must specify when ordering



DC POWER UNIT 9784
Factory-installed option - not user installable, built in on the bottom case. 10 to 28 V DC drive.

Factory-installed option B *Must specify when ordering



SSD UNIT U8331
Specified upon order, built-in type, 128 GB

Storage media * The CF card includes a PC card adapter.

* CF Card Precaution

Use only CF Cards sold by HIOKI. Compatibility and performance are not guaranteed for CF cards made by other manufacturers. You may be unable to read from or save data to such cards.



PC CARD 2G 9830
(2 GB)

PC CARD 1G 9729
(1 GB)

PC CARD 512M 9728
(512 MB)

PC Software



WAVE PROCESSOR 9335
Convert data, print and display waveforms



LAN COMMUNICATOR 9333
• Waveform data collect function
• Remote control with the PC



iPad App for MEMORY HiCORDER HMR Terminal
Download from the App Store (exclusively for Apple iPad)



LAN CABLE 9642
Straight Ethernet cable, supplied with straight to cross conversion cable, 5 m (16.41 ft) length

Printer options



RECORDING PAPER 9231
A4 width 216 mm (8.50 in) x 30 m (98.43 ft), 6 rolls/set

Case



CARRYING CASE 9783
Hard trunk type to protect unit during transport

Input modules

* Input cords not included. Please purchase them separately.
* When using 9709 with Current Unit 8971, a total of 7 current probes can be used.



ANALOG UNIT 8966
2 ch, Voltage input, DC to 5 MHz bandwidth



TEMP UNIT 8967
2 ch, thermocouple temperature input



HIGH RESOLUTION UNIT 8968
2 ch, voltage input, DC to 100 kHz bandwidth



STRAIN UNIT U8969
2 ch, strain gauge type converter amp



Conversion Cable L9769
(For and bundled with the U8969 strain unit)



FREQ UNIT 8970
2 ch, for measurement of frequency, RPM, pulse, etc.



CURRENT UNIT 8971
2 ch, for measuring current using dedicated current sensors, bundled two Conversion cable 9318
Note: Max. up to 4 modules can be installed in the MR8847A, MR8827



DC/RMS UNIT 8972
2 ch, voltage/DC to 400 kHz, RMS rectifier, DC and 30 to 100 kHz bandwidth



LOGIC UNIT 8973
4 terminals, 16 ch
Note: Max. up to 3 modules can be installed in the MR8847A



DIGITAL VOLTMETER UNIT MR8990
2ch, high-precision DC V, 0.1 μ V resolution, maximum sampling rate 500 times/s



HIGH-VOLTAGE UNIT U8974
2ch, voltage input, max. 1000 V DC and 700 V AC

Output modules

* Input cords not included. Please purchase separately.



WAVEFORM GENERATOR UNIT MR8790
4ch, DC Output: \pm 10 V,
Sine wave output: 10 mHz to 20 kHz



PULSE GENERATOR UNIT MR8791
8ch, Pulse output: 0.1 Hz to 20 kHz, Pattern output



ARBITRARY WAVEFORM GENERATOR UNIT U8793
2ch, 10 mHz to 100 kHz function generator, arbitrary waveform generator with 2 MHz D/A refresh rate, -10 V to 15 V output

Output cable

* Please contact your local HIOKI distributor for connectors that support Model MR8791.




CONNECTION CABLE L9795-01
Maximum rated voltage to ground: 33 V AC rms or 70 V DC, SMB terminal - alligator clip, Cord length: 1.5 m (4.92 ft)




CONNECTION CABLE L9795-02
Maximum rated voltage to ground: 33 V AC rms or 70 V DC, SMB terminal - BNC terminal, Cord length: 1.5 m (4.92 ft)

Logic signal measurement



LOGIC PROBE 9327 
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 100 ns or more, miniature terminal type)



LOGIC PROBE MR9321-01 
4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)



LOGIC PROBE 9320-01
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)



CONVERSION CABLE 9323
* Used for connecting the 9320/9321/MR9321 and the 9324 to the Memory HiCorder with small logic terminal models * This cable is not required for the small-terminal types 9327, 9320-01, 9321-01 and MR9321-01.

INPUT CORD (A)

* Voltage is limited to the specifications of the input modules in use



CONNECTION CORD L9790
Flexible ϕ 4.1 mm (0.16 in) thin dia. cable allowing for up to 600 V input, 1.8 m (5.91 ft) length * The end clip is sold separately.

ALLIGATOR CLIP L9790-01
Red/black set attaches to the ends of the cables L9790

GRABBER CLIP 9790-02
Red/black set attaches to the ends of the cables L9790 * When this clip is attached to the end of the L9790, input is limited to CAT II 300 V. Red/black set.

CONTACT PIN 9790-03
Red/black set attaches to the ends of the cables L9790

INPUT CORD (B)

* Voltage is limited to the specifications of the input modules in use



CONNECTION CORD L9198
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 300 V input, 1.7 m (5.58 ft) length, small alligator clip

CONNECTION CORD L9197
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 600 V input, 1.8 m (5.91 ft) length, detachable large alligator clips are bundled

GRABBER CLIP 9243
Attaches to the tip of the banana plug cable, CAT III 1000 V, 196 mm (7.72 in) length

INPUT CORD (C)

* This probe does not expand the maximum rated voltage above ground of an isolated input.



10:1 PROBE 9665
Max. rated voltage to earth is same as for input module, max. input voltage 1 kV rms (up to 500 kHz), 1.5 m (4.92 ft) length

10:1 PROBE 9666
Max. rated voltage to earth is same as for input module, max. input voltage 5 kV peak (up to 1MHz), 1.5 m (4.92 ft) length

INPUT CORD (D)

* Voltage to ground is within this product's specifications, separate power source is also required.



DIFFERENTIAL PROBE P9000-01 (Wave Only) For Memory HiCorder, 1 kV AC, DC, Frequency band: 100 kHz

DIFFERENTIAL PROBE P9000-02 (Switch between Wave/RMS) For Memory HiCorder, 1 kV AC, DC, Frequency band: 100 kHz

AC ADAPTER Z1008
100 to 240 V AC

INPUT CORD (E)

* Voltage to ground is within this product's specifications, separate power source is also required.



DIFFERENTIAL PROBE 9322
1 kV AC, 2 kV DC, Frequency band: 10 MHz

AC ADAPTER 9418-15
100 to 240 V AC

INPUT CORD (F)

* Voltage input via banana terminals limited by the voltage specifications of the respective input unit.



CONNECTION CABLE L4940
Banana plug - banana plug, Cord length: 1.5 m (4.92 ft)

EXTENSION CABLE L4931
Extend the length of banana plug cables, Cable length: 1.5 m (4.92 ft)

ALLIGATOR CLIP L4935
Attach to the tip of banana plug cables, CAT IV 600 V, CAT III 1000 V

BUS BAR CLIP L4936
Attach to the tip of banana plug cables, CAT III 600 V

MAGNETIC ADAPTER L4937
Attach to the tip of banana plug cables, CAT III 1000 V

GRABBER CLIP 9243
Attach to the tip of banana plug cables, red/black set, full length: 196mm (7.72 in), CAT III 1000 V

INPUT CORD (G)


*For the MR8990 *Voltage is limited to the specifications of the input modules in use



TEST LEAD L2200
Cable length: 70 cm, tips interchangeable with a pin test lead or alligator clip, maximum input voltage: CAT IV 600 V, CAT III 1000 V

* You can connect up to 4 Current Unit 8971 to the Memory HiCorder main unit, allowing up to 8 current sensors to be used.
* There is no limit if you connect a current sensor to the voltage input analog unit.

Up to 200 A (High precision) *ME15W (12-pin) terminal type

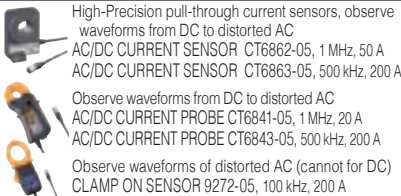

High-Precision pull-through current sensors, observe waveforms from DC to distorted AC

AC/DC CURRENT SENSOR CT6862-05, 1 MHz, 50 A

AC/DC CURRENT SENSOR CT6863-05, 500 kHz, 200 A

Observe waveforms from DC to distorted AC


AC/DC CURRENT PROBE CT6841-05, 1 MHz, 20 A

AC/DC CURRENT PROBE CT6843-05, 500 kHz, 200 A

Observe waveforms of distorted AC (cannot for DC)

CLAMP ON SENSOR 9272-05, 100 kHz, 200 A

Up to 1000 A (High precision) *ME15W (12-pin) terminal type

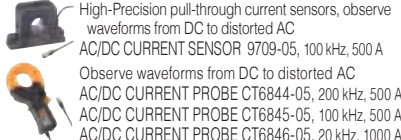

High-Precision pull-through current sensors, observe waveforms from DC to distorted AC

AC/DC CURRENT SENSOR 9709-05, 100 kHz, 500 A

Observe waveforms from DC to distorted AC

AC/DC CURRENT PROBE CT6844-05, 200 kHz, 500 A

AC/DC CURRENT PROBE CT6845-05, 100 kHz, 500 A

AC/DC CURRENT PROBE CT6846-05, 20 kHz, 1000 A


Precautions when connecting a high-precision current sensor to a Memory HiCorder Connecting to the MR8847A / MR8827 / MR8740

- High-precision current sensor (ME15W) + CT9901 + 9318 → CURRENT UNIT 8971
- High-precision current sensor (ME15W) + CT955x + BNC cable → except CURRENT UNIT 8971
- High-precision current sensor (PL23) + 9318 → CURRENT UNIT 8971
- High-precision current sensor (PL23) + CT9900 + CT955x + BNC cable → except CURRENT UNIT 8971

Other current sensor types

The Memory HiCorder can be used with various types of current sensors and probes. For details, see product information on Hioki's website.

10 mA class to 500 A (High speed)

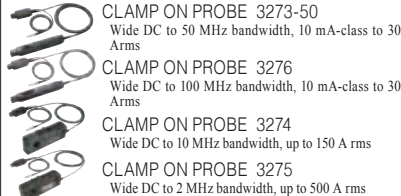

CLAMP ON PROBE 3273-50
Wide DC to 50 MHz bandwidth, 10 mA-class to 30 Arms

CLAMP ON PROBE 3276
Wide DC to 100 MHz bandwidth, 10 mA-class to 30 Arms

CLAMP ON PROBE 3274
Wide DC to 10 MHz bandwidth, up to 150 A rms

CLAMP ON PROBE 3275
Wide DC to 2 MHz bandwidth, up to 500 A rms

*A separate power supply (CT9555) is required in order to use a high-precision current sensor.
*Only sensors with ME15W (12-pin) terminals (-05 type) can be connected to the CT9555.
*The separately available Conversion Cable CT9900 is required in order to use a sensor with PL23 (10-pin) terminal.

POWER SUPPLY for Current Sensors
SENSOR UNIT CT9555 1ch, with Waveform output
CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length

PL23 (10-pin) - ME15W (12-pin) conversion
CONVERSION CABLE CT9900
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

*The separately available Conversion Cable CT9900 is required in order to use a high-precision current sensor equipped with a ME15W (12-pin) terminal (-05 type) with the Current Measuring Module 8971 (which is designed for use with the MR8847, MR8827, and MR8740).
*While the CT955x is not required in order to use a sensor equipped with a PL23 (10-pin) terminal with the 8971 or 8940, the Conversion Cable 9318 (which comes with the 8971) is required for that setup.


Direct connectable with the Current Sensor
CURRENT UNIT 8971 For the MR8847, MR8827, MR8740
CONVERSION CABLE 9318 For the CT6841/43 or other

ME15W (12-pin) - PL23 (10-pin) conversion
CONVERSION CABLE CT9901
Convert ME15W (12-pin) terminal to PL23 (10-pin) terminal

Custom cable *For P9000. Inquire with your local Hioki distributor.

- (1) Bus powered USB cable
- (2) USB(A)- Micro B cable
- (3) 3-prong cable

Non-contact Voltage measuring




NON-CONTACT AC VOLTAGE PROBE SP3000-01
5 Vrms rated, 10 Hz to 100 kHz band width

NON-CONTACT AC VOLTAGE PROBE SP3000
Sold individually

AC VOLTAGE PROBE SP9001
Sold individually

Other options for Input



CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, signal output use, 1.6 m (5.25 ft) length

CONVERSION ADAPTER 9199
Receiving side banana terminal, output BNC terminal

CONNECTION CORD 9165
Metallic BNC at both ends, for metallic BNC terminals, 1.5 m (4.92 ft), not CE marked

CONVERSION CABLE 9318
For connecting CT6841/43 and similar probes to 8971/40/51.


Temperature sensor



THERMOCOUPLE
*For reference only. Please purchase locally.

The CM7290 (available separately) is required in order to use these current sensors

100 A to 2000 A (Medium speed)

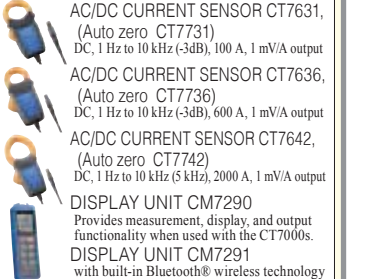

AC/DC CURRENT SENSOR CT7631, (Auto zero CT7731)
DC, 1 Hz to 10 kHz (-3dB), 100 A, 1 mV/A output


AC/DC CURRENT SENSOR CT7636, (Auto zero CT7736)
DC, 1 Hz to 10 kHz (-3dB), 600 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7642, (Auto zero CT7742)
DC, 1 Hz to 10 kHz (5 kHz), 2000 A, 1 mV/A output

DISPLAY UNIT CM7290
Provides measurement, display, and output functionality when used with the CT7000s.

DISPLAY UNIT CM7291
with built-in Bluetooth® wireless technology

500 A to 5000 A *For commercial power lines, 50/60 Hz

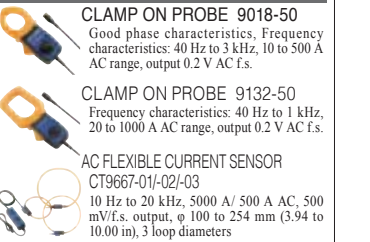


CLAMP ON PROBE 9018-50
Good phase characteristics. Frequency characteristics: 40 Hz to 3 kHz, 10 to 500 A AC range, output 0.2 V AC f.s.

CLAMP ON PROBE 9132-50
Frequency characteristics: 40 Hz to 1 kHz, 20 to 1000 A AC range, output 0.2 V AC f.s.

AC FLEXIBLE CURRENT SENSOR CT9667-01/-02/-03
10 Hz to 20 kHz, 5000 A/ 500 A AC, 500 mV/f.s. output, ϕ 100 to 254 mm (3.94 to 10.00 in), 3 loop diameters

Leak Current *For commercial power lines, 50/60 Hz

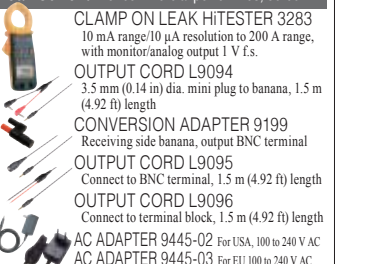

CLAMP ON LEAK HISTER 3283
10 mA range/10 μ A resolution to 200 A range, with monitor/analog output 1 V f.s.

OUTPUT CORD L9094
3.5 mm (0.14 in) dia. mini plug to banana, 1.5 m (4.92 ft) length

CONVERSION ADAPTER 9199
Receiving side banana, output BNC terminal

OUTPUT CORD L9095
Connect to BNC terminal, 1.5 m (4.92 ft) length

OUTPUT CORD L9096
Connect to terminal block, 1.5 m (4.92 ft) length

AC ADAPTER 9445-02 For USA, 100 to 240 V AC
AC ADAPTER 9445-03 For EU 100 to 240 V AC


Example sets

8 ch
voltage
output

8 ch
voltage
measurement

Anomaly simulation testing

Output measured anomalous waveforms and processed arbitrary waveforms at max. 15 V, and record the results without modification.

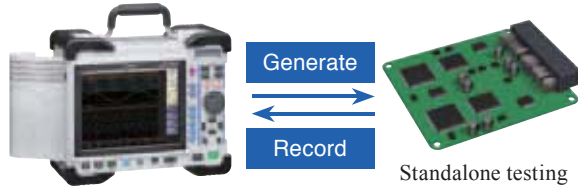

Set example

MEMORY HiCORDER	MR8847-51	1 unit
ARBITRARY WAVEFORM GENERATOR UNIT	U8793	4
ANALOG UNIT	8966	4
CONNECTION CABLE	L9795-01	8
CONNECTION CORD	L9198	8



Reproduce anomalous waveforms
Record results while testing

Output both measured anomalous waveforms and waveforms that you created yourself for testing. You can also measure the results at the same time.



Arbitrary waveforms generated for 8 units,
max. 16 channels
Isolated output for all channels


Channels can be expanded without connecting additional recorders. Isolation between the Memory HiCorder and each channel and between the channels allows connections with devices with different potentials.

3 ch
voltage
measurement

3 ch
current
measurement

High-voltage direct input measurement

Direct input is also possible without a differential probe for high voltage of 1000 V DC and 700 V AC.

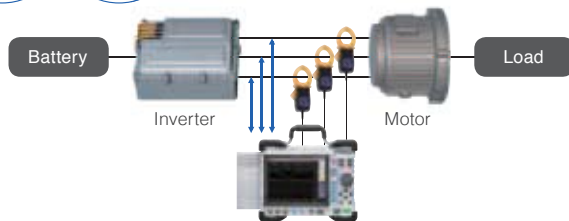

Set example

MEMORY HiCORDER	MR8847-51	1 unit
HIGH-VOLTAGE UNIT	U8974	2
CURRENT UNIT	8971	2
CLAMP ON SENSOR	9272-10	3
CONNECTION CABLE	L4940	3
ALLIGATOR CLIP	L4935	3



No DIFFERENTIAL PROBE
needed for direct high-voltage
measurements

Perform direct measurement of up to 1000 V DC and 700 V AC for high-voltage power equipment as well as 380 V and 480 V systems used globally.




Test ECUs, inverters and motors.

Video
recording

Multi-type
multi-
channel
measurement

Simultaneous measurement with high-speed camera recording

Synchronize high-speed video with multi-channel signals for recording.



Visualize prototype evaluations and
problem analyses together with
measurement data.

Easily visualize the relationship between various factors through the simultaneous measurement of data such as multi-system voltage, current and vibration together with high-speed camera recording.



* Please contact your local Hioki distributor for more information about the use of high-speed cameras.

Set example

MEMORY HiCORDER	MR8847-51	1 unit
ANALOG UNIT	8966	1
CONNECTION CORD	9197	1
High-speed camera	—	1 unit

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI
HIOKI E. E. CORPORATION

HIOKI

MEMORY HiCORDER MR8880



Capture high- to low-voltage signals in a single device

Rugged, Professional and Ready for the Field

■ CAT III 600 V insulation performance

- Maximum 600V AC/DC input - no need for a differential probe
- 4 completely isolated channels let you simultaneously record data on a 3-phase power line plus have one extra channel

■ Tough against harsh environments

- Operating temperature range: **-10°C to 50°C**
- Built to withstand mechanical shocks and vibrations (ships standard with side protectors)

■ Make settings easily with **PRESETS**

Simply select what you'd like to measure and follow the on-screen instructions to select the appropriate settings. The recorder can be easily configured to measure voltage drops and power outages.



Safe & Reliable Measurement

The MR8880 offers safe, reliable operation featuring CAT III 600 V isolated inputs in a compact yet durable design that excels at taking measurements in harsh environments.

Direct input and measurement of 3-phase power lines

CAT III 600 V isolated inputs (4 channels)

- 4 analog + 8 logic channels
- Directly input 600 V AC/DC (CAT III) and 300 V AC/DC (CAT IV) input. Measure up to 2000 V DC / 1000 V AC (CAT II) with the DIFFERENTIAL PROBE 9322 (separate power supply required.)

Don't let extreme temperatures keep you from taking measurements!

Built to withstand harsh environments

- Extensive operating temperature range [-10°C(14°F) to 50°C(122°F)] Even when operating on battery power, the MR8880 can take measurements from 0°C(32°F) to 40°C(104°F).
- Rugged, damage-resistant design features standard side protectors that guard the instrument's case.



Shown with optional printer unit.

Tough & Professional

MR8880

asita

Settings are as Easy as 1-2-3 with PRESETS

To configure the MR8880, you need only select what you'd like to measure—"Measure a commercial power supply," "Monitor a power source for a voltage drop," etc.—and follow the on-screen instructions to select the appropriate settings.

Example: Configuring the MR8880 to monitor a power source for a voltage drop:

Press the "PRESETS" key.

Select what you'd like to measure with the cursor keys.

Select "Measurement Guide"

- Basic Guide
- Measurement Guide
- Load Set.

Select "Voltage drop of power outage, etc."

- Measure Power Supply on INSTANT
- Measure Power Supply on RMS
- Voltage drop of power outage, etc.
- Save data to media

"Voltage drop of power outage, etc." settings screen

1. Channel Settings

Channel	Use	Start when	100Vrms(141.4Vpeak)	50Hz drops to	90Vrms(127.2Vp)
CH1	Use	Start when	100Vrms(141.4Vpeak)	50Hz drops to	90Vrms(127.2Vp)
CH2	Use	Start when	100Vrms(141.4Vpeak)	50Hz drops to	90Vrms(127.2Vp)
CH3	Use	Start when	100Vrms(141.4Vpeak)	50Hz drops to	90Vrms(127.2Vp)
CH4	Use	Start when	100Vrms(141.4Vpeak)	50Hz drops to	90Vrms(127.2Vp)

2. Recording Length Settings

Measure for 25ms after voltage drops

3. Pre-trigger Settings

Do not record waveform before voltage drop

4. Repeat & Save Settings

Measure only once in accordance with the set values.

Save measured data Do not save

Start measurement

1. Select the channel you wish to use. Use · Not Use

Select the power line voltage. 100V · 200V

Select the frequency. 50Hz · 60Hz

Select the threshold. 90/85/80/75/70/65/60 V

2. Select the recording length. 25ms/50ms/100ms/200ms

3. Save pre-triggered waveforms. Record · Do not record

4. Select whether to repeat measurement. Only once · Repeatedly

Select the desired save settings.

- Do not save
- Save to CF card in Binary Format
- Save to CF card in Text Format
- Save to USB memory in Binary Format
- Save to USB memory in Text Format

Start measurement

Press the START key


Press START to begin measuring.

START

Other Convenient Functions

Basic Guide

Press the "PRESETS" key and select "Basic Guide"

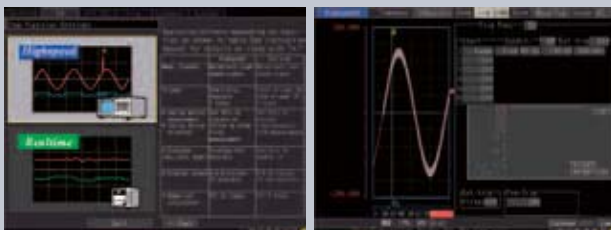


Select the high-speed or real-time function.
(The auto-range settings can be enabled when using the high-speed function.)

Make the necessary settings in accordance with information provided by the guide.
(Settings can be configured while checking the measurement waveform.)

Start measurement

Loading settings

Press the "PRESETS" key and select "Loading settings"

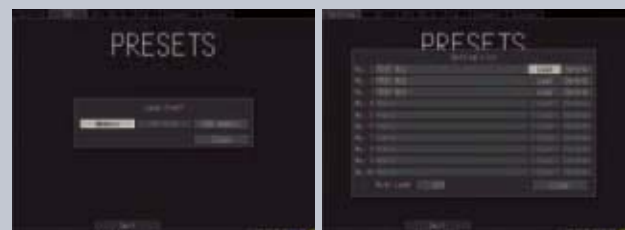

Select the source from which to load settings.
(Memory / CF card / USB memory)

Select the settings file to load from a list of settings stored on the selected source and press the "Load" key.

Start measurement

Applications

The MR8880 provides a turnkey solution for both high-speed measurement at 1 MS/s and long-term measurement. Its ability to measure everything from high- to low-voltage signals allows it to play an important role in a variety of measurement scenarios.

1 Measure the instantaneous waveform at startup or a suddenly generated abnormal waveform.


High-speed measurement using the high-speed function

- Fastest sampling period of 1 μ s (measuring all channels simultaneously)
- Measurement data is recorded in the instrument's internal memory (1 MW).

Recording Time (Internal memory)

All channels (4 analog + 8 logic channels)			
Time Axis Range	Sampling Speed	Recording Interval	Max. Recording Time
100 μ s/DIV	1 MS/s	1 μ s	1 s
200 μ s/DIV	500 kS/s	2 μ s	2 s
500 μ s/DIV	200 kS/s	5 μ s	5 s
1ms/DIV	100 kS/s	10 μ s	10 s
2ms/DIV	50 kS/s	20 μ s	20 s
5ms/DIV	20 kS/s	50 μ s	50 s
10ms/DIV	10 kS/s	100 μ s	1m 40 s
20ms/DIV	5 kS/s	200 μ s	3m 20 s
50ms/DIV	2 kS/s	500 μ s	8m 20 s
100ms/DIV	1 kS/s	1 ms	16m 40 s

The maximum recording length is fixed regardless of the number of channels in use.

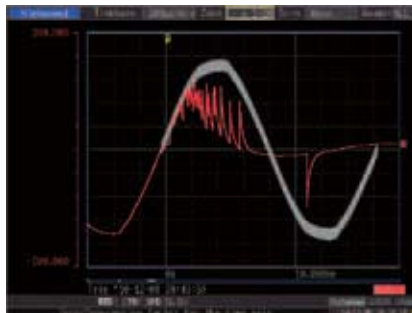

Example record of an abnormal waveform

A waveform recorded using a waveform judgment trigger. The judgment area can be displayed simultaneously.

2 Measure RMS value fluctuations for a power line over an extended period of time

Long-term measurement and recording using the real-time function


Recording Capacity

Note: Use only Hioki CF cards that are guaranteed to operate with the HiCorder for continuous long-term recording.

Recording Interval	All channels (4 analog + 8 logic channels), recording waveform (binary) data only			
	Internal memory (8MB)	512MB (9728)	1GB (9729)	2GB (9830)
100 μ s	1m 40s	1h 25m 20s	2h 46m 40s	5h 33m 20s
200 μ s	3m 20s	2h 50m 40s	5h 33m 20s	11h 6m 40s
500 μ s	8m 20s	7h 6m 39s	13h 53m 19s	1d 3h 46m 39s
1ms	16m 40s	14h 13m 19s	1d 3h 46m 39s	2d 7h 33m 19s
2ms	33m 20s	1d 4h 26m 38s	2d 7h 33m 18s	4d 15h 6m 38s
5ms	1h 23m 20s	2d 23h 6m 34s	5d 18h 53m 14s	11d 13h 46m 34s
10ms	2h 46m 40s	5d 22h 13m 8s	11d 13h 46m 28s	23d 3h 33m 8s
20ms	5h 33m 20s	11d 20h 26m 15s	23d 3h 32m 55s	46d 7h 6m 15s
50ms	13h 53m 20s	29d 15h 5m 39s	57d 20h 52m 19s	115d 17h 45m 39s
100ms	1d 3h 46m 40s	59d 6h 11m 17s	115d 17h 44m 37s	231d 11h 31m 17s
200ms	2d 7h 33m 20s	118d 12h 22m 34s	231d 11h 29m 14s	-*-
500ms	5d 18h 53m 20s	296d 6h 56m 26s	-*-	∴
1s	11d 13h 46m 40s	-*-	∴	∴
2s	23d 3h 33m 20s	∴	∴	∴
∴	∴	∴	∴	∴
1 min	694d 10h 40m	-*-	-*-	-*-

- Maximum recording time is inversely proportional to number of recording analog channels.
- Because the actual capacity of a CF card is less than that indicated, expect actual maximum times to be about 90% of those in the table.
- "*" exceeds 1 year.
- Proper operation is not guaranteed for extended recording periods (one year or longer). This type of operation impacts the product's warranty period and service life.

- Recording interval of 100 μ s to 1 min
- Waveform data is saved directly in a binary format to a CF card or USB memory.

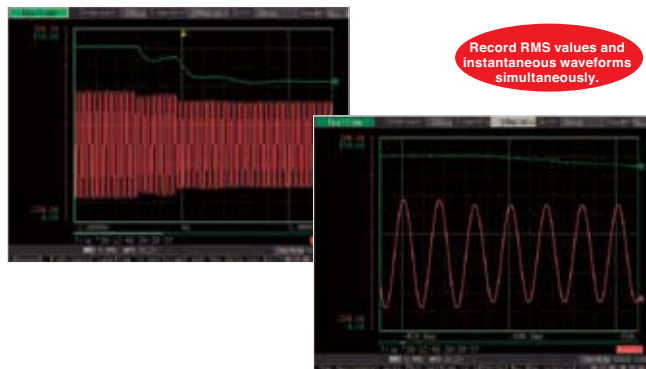

3 Measure the phase voltages for all three phases of a three-phase motor simultaneously.

Four channels of isolated CAT III 600 V input

The MR8880 can measure the voltages at different contacts without the need for a differential probe.



4 Check for fluctuations in low-voltage signals such as instrumentation or sensor output.

Thanks to its 14-bit, high-resolution A/D converter and the combination of a high-sensitivity 10 mV/div range and a 5 Hz filter (for noise rejection), the MR8880 can deliver stable measurement of sensor output.

5 Investigate why your office's power supply occasionally exhibits instability.

The MR8880 is capable of mixed recording of RMS values, DC voltage, and logic signals, allowing it to simultaneously record data describing the interrelationships between equipment power supplies and UPS output and control signals.


Functionality and Performance

The MR8880 delivers convenient functionality designed to maximize ease of use along with exceptional performance. See how this instrument can transform your concern and discontent to peace of mind and satisfaction.

1 Take home data for later viewing on a computer

Data can be saved directly to external media.

- In addition to CF cards, the MR8880 can store data on handy USB memory sticks.
- Data can be saved in real time to external media (at up to 10 kS/s).
- External media can be switched while measurement continues.
If the recording interval is set to 100 μ s, media must be swapped out within 20 seconds.
- External media is protected in the event of an unexpected power outage during measurement.
By backing up the internal power supply until processing to save data to the external media completes, the instrument enables highly reliable data collection.

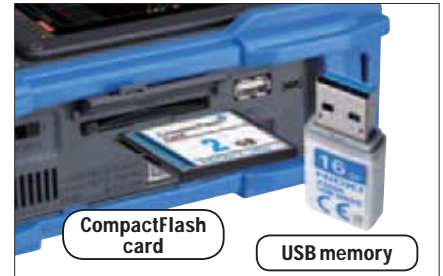


Use only HIOKI CF cards, which are manufactured to strict industrial standards, for long-term storage of important data.
Note: Operation of non-HIOKI CF cards is not guaranteed

2 Can the MR8880 withstand the vibrations in a moving vehicle?


The instrument complies with JIS automotive vibration standards.

Thanks to its ability to withstand a high level of vibration, the MR8880 can be used to collect data in moving vehicles. Included side protectors further increase the device's durability.

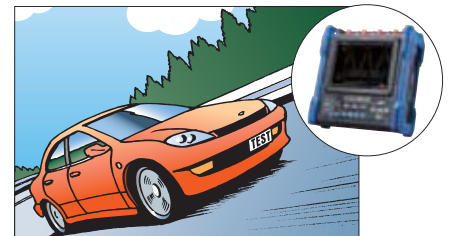

3 Will the screen be hard to read while taking measurements outdoors?

The MR8880 features a 5.7-inch TFT color LCD that offers excellent visibility, even while taking measurements in an outdoor setting. The display is even engineered for easy viewing in the presence of reflections.



4 What if there's no power available in the vehicle being tested?

A high-capacity battery is available. The MR8880 can be used continuously for 4 hours on battery power.



5 Is the printer easy to use?

Loading recording paper is a snap thanks to the MR8880's one-touch loading mechanism. Quickly print data on-site. (Real-time print function: 1s/div ~)




Shown with optional printer unit.

Simply load the recording paper roll and close the cover.



Example printout (actual size)

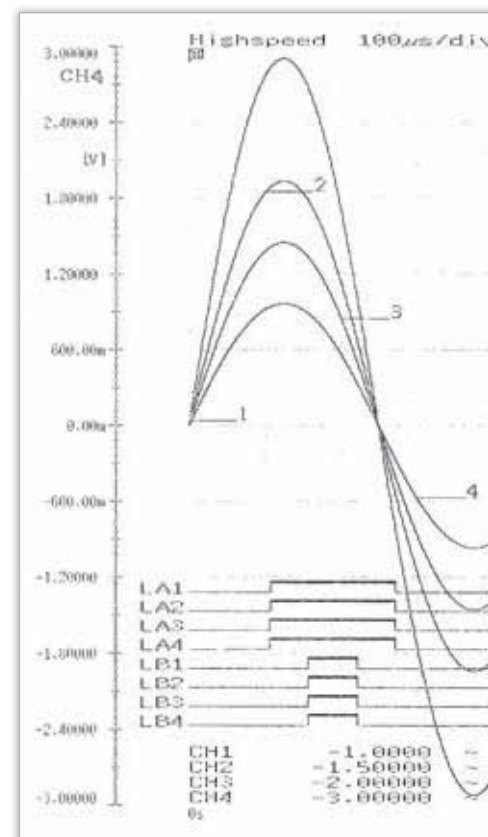

Specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Basic specifications	
Measurement functions	High-speed function (high speed recording) Real-time function (actual time recording)
Number of channels	4 analog + 8 logic Isolated analog channels, isolated input and outputs, logic has common GND.
Maximum sampling rate	1Msamples/s (1 μ s cycle, all channels simultaneously)
Memory capacity	14bit \times 1 M words/ch (1 word = 2 bytes, not expandible)
External memory	CF card slot \times 1 (Up to 2 GB, supports FAT16 and FAT32 formats) USB memory \times 1 (USB 2.0 -A receptacle)
Time accuracy (at 23°C)	Sampling time accuracy: \pm 0.0005 %, Clock precision: \pm 3s/day
Backup function (reference value at 23°C)	Clock and settings: 10 years or more (at 25°C / 77°F) Waveform backup function: Approx. 40 minutes • When instrument is powered off at least 3 minutes after being turned on
External control	External trigger input, Trigger output, external start input, external stop input, status output, ground pin
Interface	USB: 1 port USB 2.0 High Speed mini-B receptacle Functions: Configure settings/perform measurement using communications commands: transfer file stored in CF/USB memory to computer (USB drive mode)
Environmental conditions for use (no condensation)	Temperature range: -10°C (14°F) to 50°C (122°F) Humidity range: -10°C (14°F) to 40°C (104°F), 80% rh or less 40°C (104°F) to 45°C (113°F), 60% rh or less 45°C (113°F) to 50°C (122°F), 50% rh or less When powered by BATTERY PACK Z1000: 0°C (32°F) to 40°C (104°F), 80% rh or less When recharging the Z1000: 10°C (50°F) to 40°C (104°F), 80% rh or less
Environmental conditions for storage (no condensation)	Temperature range: -20°C (-4°F) to 60°C (140°F) Humidity range: 80% rh or less (-20°C (-4°F) to 40°C (104°F)), 60% rh or less (40°C (104°F) to 45°C (113°F)), 50% rh or less (45°C (113°F) to 60°C (140°F)) BATTERY PACK Z1000: -20°C (-4°F) to 40°C (104°F), 80% rh or less
Compliance standard	Safety: EN61010 EMC: EN61326, EN61000-3-2, EN61000-3-3 Vibration resistance: JIS D 1601, Type 1: passenger vehicle, Conditions: equivalent to Type A
Power requirements	1) AC ADAPTER Z1002: 100 to 240V AC (50/60 Hz) 2) BATTERY PACK Z1000: 7.2V DC Note: LR6/AA alkaline batteries are not sufficient to power the unit when it is connected with the Printer Unit MR9000. Use of other power supplies is required. (Continuous operating time is given as a reference value at 23°C.) Continuous operating time: Approx. 3 hours with backlight on, approx. 3.5 hours with backlight off (AC adapter has priority when both are used) 3) LR6 (AA) \times 8 Approx. 40 minutes with backlight on. Approx. 50minutes with backlight off. (when used with AC adapter, AC adapter takes precedence) 4) 10 to 28V DC (using special order cable)
Charging functions (reference value at 23°C)	Charging time is about 3 hours (can be charged by connecting the AC adapter while the Z1000 battery pack is attached)
Max. rated power	1) When instrument is powered with the Z1002 AC adapter or an external DC power supply: 11 VA ^{*1} , 10 VA ^{*2} , 40 VA ^{*3} 2) When instrument is powered with the Z1000 battery pack; 9 VA ^{*1} , 8 VA ^{*2} , 22 VA ^{*3} ^{*1} Real-time data storage, backlight on ^{*2} Real-time data storage, backlight off ^{*3} Real-time data storage, backlight on, with printer used
Dimensions, mass (including battery pack)	205 mm (8.07 in)W \times 199 mm (7.83 in)H \times 67 mm (2.64 in)D, 1.66 kg (58.6 oz) (printer detached) 303 mm (11.93 in)W \times 199 mm (7.83 in)H \times 67 mm (2.64 in)D, 2.16 kg (76.2 oz) (printer attached)
Accessories	Instruction manual \times 1, AC adapter Z1002 \times 1, Alkaline battery box \times 1, Strap \times 1, USB cable \times 1, Application disk (Wave viewer Wv, Communication commands table) \times 1

Function	
Presets	Select from basic measurement guide, example measurement guide, and commands for loading internally stored settings.
Scaling function	Select decimal or scientific notation for each channel. 1) Scaling ratio: Select scaling ratio, offset value, and units. 2) Two-point configuration: Set input values, post-scaling values, and units. 3) HIOKI sensor: Set HIOKI clamp-on probe and range value. 4) Output rate setting: Select scaled value per 1 V from a list.
Data protection	Open files are closed before the instrument turns itself off when a power outage occurs while saving data to recording media. When powering the instrument with a battery, open files are closed and access to the media is stopped when remaining battery power falls below a certain level. *Valid when at least 3 minutes has elapsed since the instrument was turned on.
Reservation function	Up to 10 measurement start and measurement stop conditions can be set.
Other	Settings can be automatically loaded from internal memory or media when the instrument is turned on. Up to 10 settings can be saved in the instrument's internal memory.

Printer (Printer Unit MR9000 docks onto the main device)	
Features	Printer paper one-touch loading, high-speed thermal printing
Printer paper	112 mm (4.4 in) \times 18 m (59.06 ft), thermal paper roll (using 9234) Recording width: 100 mm, 10 div f.s., 1 div=10 mm (80 dot/div)
Recording speed	Max. 10 mm/s (0.39 inch/s) (Printing is not supported when using alkaline batteries.)

High-speed function (high speed recording)	
Time axis	100 μ s to 100ms/div, 10 range, resolution: 100 points/div
Sampling period	1/100 of time axis ranges (minimum sampling period 1 μ s, all channels simultaneously)
Recording length	5 to 10000 divisions fixed (5division steps)
Automatic save function	Binary data, text data, calculation results, binary + calculation results, text + calculation results, or NONE
Other save functions	Save and delete function: ON/OFF
Screen settings	Split screen (1, 2, or 4 segments), X-Y waveform compositing (1 screen)
Pre-trigger	Can record data from before the trigger point, 0 to 100 % of recording length; 13 settings, or user-configured
Waveform scrolling	Backwards scrolling through past waveform data both during and after measurement
Calculation functions	Up to four arithmetic operations simultaneously Average value, effective (RMS) value, peak to peak value, maximum value, time to maximum value, minimum value, time to minimum value, period, and frequency, area, X-Y area.

Real-time function (actual time recording)	
Recording interval	100 μ s to 500 μ s, 1ms to 500ms, 1s to 1min, 19 settings Display time axis: 10ms to 1day/div, 22 ranges
Real-time printing (with optional MR9000)	ON/OFF *Simultaneous printing: Supported when using a time axis slower than 1 s/div.
Recording Time	Continuous save to CF card or USB memory can be set ON/OFF
Envelope mode	ON/OFF
Waveform recording	The last 1 Mwords (before measurement was stopped) are saved in the instrument's internal memory (when envelope mode is on, 500 kwords).
Real-time save function	Binary data, text data, calculation results, binary + calculation results, text + calculation results, or NONE
Other save functions	Split save: ON/OFF/fixd time Save and delete: ON/OFF Eject media: Media can be ejected while saving data in real time.
Event marks	1) Event marks can be input during measurement (up to 100 marks). 2) Can move to waveform before or after an event mark based on specified event number input.

Trigger function	
Repeat recording	Single/Repeat
Trigger timing	High-speed function: Start Real-time function: Start, Stop, Start & Stop
Trigger conditions	AND/OR supported for all trigger sources Trigger sources can be selected for each channel. Instrument enters free-run mode when all trigger sources are off.
Trigger source	1) Analog input CH1 - CH4 2) Logic input LA1 - LA4, LB1 - LB4 (4ch \times 2 probes) 3) External trigger 4) Interval trigger: Fixed-time recording for specified measurement interval (month/day/hours/minutes/seconds)
Trigger types	1) Level 2) In 3) Out 4) Voltage drop (High-speed function) : For AC 50/60 Hz power lines 5) Waveform judgment (High-speed function): For AC 50/60 Hz power lines 6) Logic 7) External: Rising edge/falling edge
Level setting resolution	0.1 % f.s. (f.s.=10 div)
Trigger filter	High-speed function: 7 settings from 10 to 1000 samples or OFF Real-time function: ON/OFF
Trigger output	Open collector (5 V output, active Low)

Analog input <small>(Accuracy defined at 23\pm5°C, 80% rh or less, for measurements taken following zero adjustment 30 minutes after instrument is turned on)</small>	
Measurement functions	4-channel voltage measurement; switchable between instantaneous value (waveform) and RMS value
Input connectors	Isolated BNC connector (input impedance 1 M Ω , input capacitance 7 pF)
Max. rated voltage to earth	600 V AC, DC CAT III / 300 V AC, DC CAT IV (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	10 mV to 100 V/div, 13 ranges, full scale: 10 div, AC voltage that can be measured and displayed using high-speed function: 600 Vrms Low-pass filter: 5 Hz/50 Hz/500 Hz/5 kHz/50 kHz
Measurement resolution	1/640 of measurement range (using 14-bit A/D conversion, at \times 1)
Highest sampling rate	1 MS/s (simultaneous sampling in 4 channels)
Instantaneous value measurement accuracy	\pm 0.5% f.s. (after zero-adjust)
RMS measurement	RMS accuracy: \pm 1.5% f.s. (30Hz to 1kHz) \pm 3% f.s. (1kHz to 10kHz) Response time: 300ms (rising edge 0 to 90% of full scale with filter off) Crest factor: 2
Frequency characteristics	DC to 100 kHz \pm 3dB
Input coupling	DC/GND
Max. rated voltage between terminals	600 V AC, DC (maximum voltage which when applied to between input terminals does not damage them)

Screen display	
Display	5.7-inch VGA-TFT color LCD (640 × 480dot)
Waveform display scale	Time axis: × 10 to × 2 (zoom view supported for high-speed recording only), × 1, × 1/2 to × 1/2,000 Voltage axis: × 20 to × 2, × 1, × 1/2 to × 1/10
Comment input	Titles and comments input for individual channels
Logic waveform display	Select 2 recording widths; display positions can be set separately
Display items	Waveform display; simultaneous display of waveform and gage; simultaneous display of waveform, gage, and settings; simultaneous display of waveform and calculation results; simultaneous display of waveform and cursor values (A/B cursor values) The following display items are supported when using real-time functionality:
Monitor function	Value (instantaneous value or RMS value) and measured waveform (monitor screen display with refresh rate of 0.5 sec) Display digits: 5
Instantaneous value display	Time: Display of time elapsed since start of measurement or trigger point Date: Display of date and time at which data was captured Number of data points: Display of number of data points captured since start of measurement
Other display functions	<ul style="list-style-type: none"> • Cursor measurement (two cursors [A/B], support for all channels) • Upper and lower limits can be set (to align waveform amplitude with upper and lower limits). • The zero position of the analog waveform can be moved in 1% steps. • The waveform display can be set to any of 24 colors. • Zero adjustment can be performed for all channels and ranges at once.

■ PC Software Specifications Bundled with the MR8880 in the CD-R

Wave Viewer (Wv) Software	
Functions	<ul style="list-style-type: none"> • Simple display of waveform file • Text conversion: convert binary data file to text format, with selectable space or tab separators in addition to CSV, and specifiable section, thinning available • Display format settings: scroll functions, enlarge/reduce display, display channel settings • Others: voltage value trace function, jump to cursor/trigger position function
Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP

■ Specifications of Options (sold separately)

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 30 cm (0.98 ft), approx. 150 g (5.3 oz)
Note: The unit-side plug of the 9320-01 is different from the 9320.




LOGIC PROBE 9320-01	
Function	Detection of voltage signal or relay contact signal for High/Low state recording
Input	4 channels (common ground between unit and channels), digital/contact input, switchable (contact input can detect open-collector signals) Input resistance: 1 MΩ (with digital input, 0 to +5 V) 500 kΩ or more (with digital input, +5 to +50V) Pull-up resistance: 2 kΩ (contact input: internally pulled up to +5 V)
Digital input threshold	1.4V/ 2.5V/ 4.0V
Contact input detection resistance	1.4 V: 1.5 kΩ or higher (open) and 500 Ω or lower (short) 2.5 V: 3.5 kΩ or higher (open) and 1.5 kΩ or lower (short) 4.0 V: 25 kΩ or higher (open) and 8 kΩ or lower (short)
Response speed	500ns or lower
Max. allowable input	0 to +50V DC (the maximum voltage that can be applied across input pins without damage)

Cable length and mass: 70 cm (2.30 ft), Output side: 1.5 m (4.92 ft), 170g (6.0 oz)



DIFFERENTIAL PROBE P9000 (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement modes	P9000-01: For waveform monitor output, Frequency properties: DC to 100 kHz -3 dB P9000-02: Switches between waveform monitor output/AC effective value output Wave mode frequency properties: DC to 100 kHz -3 dB, RMS mode frequency properties: 30 Hz to 10 kHz, Response time: Rise 300 ms, Fall 600 ms
Division ratio	Switches between 1000:1, 100:1
DC output accuracy	±0.5 % f.s. (f.s. = 1.0 V, division ratio 1000:1), (f.s. = 3.5 V, division ratio 100:1)
Effective value measurement accuracy	±1 % f.s. (30 Hz to less than 1 kHz, sine wave), ±3 % f.s. (1 kHz to 10 kHz, sine wave)
Input resistance/capacity	H-L: 10.5 MΩ, 5 pF or less (at 100 kHz)
Maximum input voltage	1000 V AC, DC
Maximum rated voltage to ground	1000 V AC, DC (CAT III)
Operating temperature range	-40°C to 80°C (-40°F to 176°F)
Power supply	(1) AC adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter), 0.9 VA (main unit only) (2) USB bus power (5 V DC, USB-microB terminal), 0.8 VA (3) External power source 2.7 V to 15 V DC, 1 VA
Accessories	Instruction manual ×1, Alligator clip ×2, Carrying case ×1

■ Appearance and Dimensions

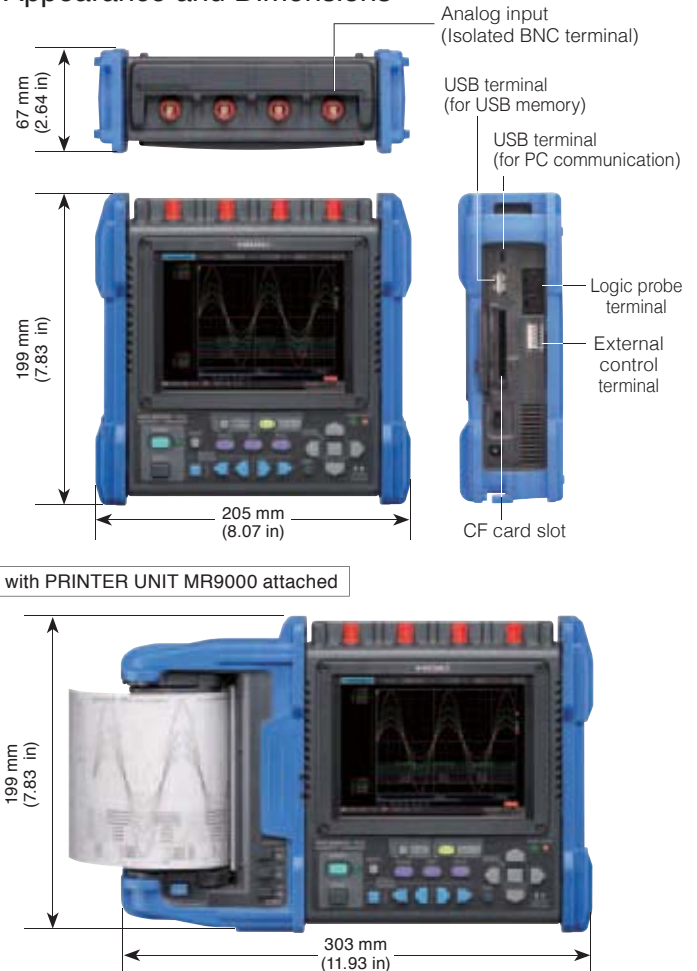

with PRINTER UNIT MR9000 attached

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 1 m (3.28 ft), approx. 320 g (11.3 oz)
Note: The unit-side plug of the MR9321-01 is different from the MR9321.



LOGIC PROBE MR9321-01	
Function	Detection of AC or DC relay drive signal for High/Low state recording Can also be used for power line interruption detection
Input	4 channels (isolated between unit and channels), HIGH/LOW range switching Input resistance: 100 kΩ or higher (HIGH range), 30 kΩ or higher (LOW range)
Output (H) detection	170 to 250 V AC, ±DC 70 to 250 V (HIGH range) 60 to 150 V AC, ±DC 20 to 150 V (LOW range)
Output (L) detection	0 to 30 V AC, ±DC 0 to 43 V (HIGH range) 0 to 10 V AC, ±DC 0 to 15 V (LOW range)
Response time	Rising edge 1 ms max., falling edge 3 ms max. (with HIGH range at 200 V DC, LOW range at 100 V DC)
Max. allowable input	250 Vrms (HIGH range), 150 Vrms (LOW range) (the maximum voltage that can be applied across input pins without damage)

WAVE PROCESSOR 9335	
Distribution media	One CD-R
Operating environment	Computer running under Windows 10/8/7 (32/64-bit), Vista (32-bit), XP
Display functions	Waveform display, X-Y display, Digital value display, Cursor function, Scroll function, Maximum number of channels (32 channels analog, 32 channels logic), Gauge display (time, voltage axes), Graphical display
File loading	Readable data formats (MEM, REC, RMS, POW), Maximum loadable file size: Maximum file size that can be saved by a given device (file size may be limited depending on the computer configuration)
Data conversion	Conversion to CSV format , Tab delimited, Space delimited, Data culling (simple), Convert for specified channel, Batch conversion of multiple files
Print functions	Printing image file output (expanded META type, "EMF"), Supported printer: usable on any printer supported by operating system Print formatting: (1 up, 2-to-16 up, 2-to-16 rows, X-Y 1-to-4 up, preview, hard copy)
Other	Parameter calculation, Search, Clipboard copy, Launching of other applications



MR8880 Options in Detail

Recommended

Input cable (A)

*Voltage is limited to the specifications of the input section

ALLIGATOR CLIP L9790-01
Red/black set attaches to the ends of the cables L9790

CONTACT PIN 9790-03
Red/black set attaches to the ends of the cables L9790

GRABBER CLIP 9790-02
Red/black set attaches to the ends of the cables L9790

CONNECTION CORD L9790
Flexible ϕ 4.1 mm (0.16 in) thin dia., cable allowing for up to 600 V input. 1.8 m (5.91 ft) length
* The end clip is sold separately.

**When this clip is attached to the end of the L9790, input is limited to CAT II 300 V. Red/black set.*

Input cable (B)

*Voltage is limited to the specifications of the input section

CONNECTION CORD L9198
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 300 V input. 1.7 m (5.58 ft) length, small alligator clip

GRABBER CLIP 9243
Attaches to the tip of the banana plug cable, CAT III 1000 V, 196 mm (7.72 in) length

CONNECTION CORD L9197
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 600 V input. 1.8 m (5.91 ft) length, a detachable large alligator clips are bundled

Input cable (D)

*Voltage to ground is within this product's specifications. Separate power source is also required.

DIFFERENTIAL PROBE P9000-01
Waveform only, up to 1 kV AC/DC, band width up to 100kHz

DIFFERENTIAL PROBE P9000-02
Waveform/RMS value switchable, up to 1 kV AC/DC, band width up to 100kHz

AC ADAPTER Z1008
100 to 240 V AC

Custom cable

*For P9000. Inquire with your Hioki distributor.

- (1) Bus powered USB cable
- (2) USB(A)- Micro B cable
- (3) 3-prong cable

Input cable (E)

*Voltage to ground is within this product's specifications. Separate power source is also required.

DIFFERENTIAL PROBE 9322
For up to 1kV AC or 2kV DC, frequency band width up to 10MHz

AC ADAPTER 9418-15
100 to 240 V AC.

Logic signal measurement

* Only the small terminal types can be used. * The 9323 is not required for the small-terminal types 9327, 9320-01, 9321-01 and MR9321-01.

LOGIC PROBE 9320-01
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)

LOGIC PROBE MR9321-01
4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)

CONVERSION CABLE 9323
*Used for connecting the 9320/9321/MR9321 and the 9324 to the Memory HiCorder with small logic terminal models

Other options

CARRYING CASE C1003
Includes compartment for options, soft case type

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, for signal output, 1.6 m (5.25 ft) length



Model : MEMORY HiCORDER MR8880

Model No. (Order Code) (Note)

MR8880-20 (4ch, printer unit option)
*Test leads are not included. Purchase the leads appropriate for your application separately

Printer options

PRINTER UNIT MR9000
Printing width 100 mm (3.94 in), used together with the MR8880-20 main body, includes 1 roll of recording paper

RECORDING PAPER 9234
112 mm (4.41 in) \times 18 m (59.06 ft), roll type, 10 rolls/set

MR8880 + MR9000

Storage media

Includes a PC card adapter with the 9728/9729, and the 9830
Use only CF Cards or USB drive sold by HIOKI. Compatibility and performance are not guaranteed for CF cards/USB memory stick made by other manufacturers. You may be unable to read from or save data to such cards.

PC CARD 2G 9830
2 GB capacity

PC CARD 1G 9729
1 GB capacity

PC CARD 512M 9728
512 MB capacity

USB DRIVE Z4006
16 GB, Long-life, High-reliability SLC Flash Memory

PC Software

WAVE PROCESSOR 9335
Convert data, print and display waveforms

Power supply

*Z1002 is a bundled accessory

AC ADAPTER Z1002
For main unit, 100 to 240 V AC

BATTERY PACK Z1000
NiMH, Charges while installed in the main unit

*A separate power supply (CT955x) is required in order to use a high-precision current sensor.
*Only sensors with ME15W (12-pin) terminals (-05 type) can be connected to the CT955x.
*The separately available Conversion Cable CT9900 is required in order to use a sensor with PL23 (10-pin) terminal

POWER SUPPLY for Current Sensors

SENSOR UNIT CT9555 1ch, with Waveform output

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length

PL23 (10-pin) - ME15W (12-pin) conversion

CONVERSION CABLE CT9900
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

Up to 1000 A (High precision) *ME15W (12-pin) terminal type

High-precision pull-through type, monitor the waveforms of DC to distorted AC current

AC/DC CURRENT SENSOR 9709-05, 100 kHz band width, 500A

Monitor the waveforms of DC to distorted AC current

AC/DC CURRENT PROBE CT6844-05, 200 kHz band width, 500A

AC/DC CURRENT PROBE CT6845-05, 100 kHz band width, 500A

AC/DC CURRENT PROBE CT6846-05, 20 kHz band width, 1000A

Precautions when connecting a high-precision current sensor to a Memory HiCorder

Connecting to the MR8880/MR8875/MR8870

- High-precision current sensor (ME15W) + CT9555 + BNC cable \rightarrow MR8880
- High-precision current sensor (PL23) + CT9900 + CT9555 + BNC cable \rightarrow MR8880

Other current sensor types

The MR8880 can be used with various types of current sensors and probes. For details, see product information on Hioki's website.

The CT7290 (available separately) is required in order to use these current sensors.

100 A to 2000 A (Medium speed)

AC/DC CURRENT SENSOR CT7631, (Auto zero CT7731)
DC, 1 Hz to 10 kHz (-3dB), 100 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7636, (Auto zero CT7736)
DC, 1 Hz to 10 kHz (-3dB), 600 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7642, (Auto zero CT7742)
DC, 1 Hz to 10 kHz (5 kHz), 2000 A, 1 mV/A output

DISPLAY UNIT CM7290
Provides measurement, display, and output functionality when used with the CT7000s.

DISPLAY UNIT CM7291
with built-in Bluetooth® wireless technology

500 A to 5000 A *For commercial power lines, 50/60 Hz

CLAMP ON PROBE 9018-50
Good phase characteristics, Frequency characteristics: 40 Hz to 3 kHz, 10 to 500 A AC range, output 0.2 V AC f.s.

CLAMP ON PROBE 9132-50
Frequency characteristics: 40 Hz to 1 kHz, 20 to 1000 A AC range, output 0.2 V AC f.s.

AC FLEXIBLE CURRENT SENSOR CT9667-01/-02/-03
10 Hz to 20 kHz, 5000 A/ 500 A AC, 500 mV/f.s. output, ϕ 100 to 254 mm (3.94 to 10.00 in), 3 loop diameters

Leak Current *For commercial power lines, 50/60 Hz

CLAMP ON LEAK HITESTER 3283
10 mA range/10 μ A resolution to 200 A range, with monitor/analog output 1 V f.s.

OUTPUT CORD L9095
Connect to BNC terminal, 1.5 m (4.92 ft) length

AC ADAPTER 9445-02
For USA, 100 to 240 V AC, 9 V/ 1 A

AC ADAPTER 9445-03
For EU 100 to 240 V AC, 9 V/ 1 A

Non-contact Voltage measuring

NON-CONTACT AC VOLTAGE PROBE SP3000-01
5 Vrms rated, 10 Hz to 100 kHz band width

NON-CONTACT AC VOLTAGE PROBE SP3000
Sold individually

AC VOLTAGE PROBE SP9001
Sold individually

HIOKI

MEMORY HiCORDER MR8870



Oscilloscope-like Waveform Observation, Plus Recording of RMS Variations - In a Single Device!

RMS recording function makes its debut on this device!

Enhancing the ultra-compact oscilloscope-functioning Hioki 8870, the new MR8870 features a new RMS recording mode and real-time save to a CF card.

- **Measure safely, with isolated input for all channels**
Test commercial power lines with ease of mind thanks to isolated input for both channels
- **Monitor instantaneous waveforms on-site**
High-speed waveform observation/recording with 1 M sampling, despite compact size
- **Monitor fluctuations in commercial power lines**
Real-time recording of data to CF card with 1 ms recording interval in a compact package
- **Synchronize two HiCORDERs together to measure three-phase lines and other channels needing three or more channels**
Bundled PC application enables integration/observation of synchronized data from two HiCORDERs on a single screen

CE

asita
TECNOLOGIE DI MISURA

Memory Recorder

An oscilloscope in the palm of your hand

Capture unpredictable phenomena using waveforms !

Recording of EV and HEV starting current waveforms


The MR8870 can be used with a clamp-on AC/DC current sensor to observe the current waveform at motor start. Hioki's clamp-on sensor line covers a frequency band ranging from DC to frequencies of 10 kHz and higher.



The photograph shows the MR8880, the MR8870's four-channel sister product.

Recording of motor rush current

Motor power-on inrush current waveforms can be precisely recorded. The Clamp On Probe the 9018-50 is available for current measurement, as is the Clamp On Leak HiTester 3283. In addition, to measure direct current waveforms, a variety of Current meters such as the CLAMP ON AC/DC HiTESTER 3284/3285 are available upon request.



3285



Signal input requires Connection Cord L9095 (for use with BNC terminals).



9018-50


Analysis of sequence controller issues

When sequence controllers being used in applications such as production and testing lines stop due to errors or generate warning output, potential causes include momentary AC power interruptions and brownouts. The MR8870 is ideal for analyzing the operation of such systems since it can record the correlation of sequence relay signals, AC power circuits, and DC voltage circuits as waveforms using power supply anomalies as a trigger.



Check inverter output waveforms

Inverter performance analysis requires simultaneous observation of the high frequency carrier signal and the low frequency fundamental waveform being switched. The combination of high-speed sampling capability and high-capacity memory make these observations possible. For current waveform observations, use Hioki clamp sensors capable of high-frequency measurements without direct electrical contact.



CB timing measurements

Analyze the relationships of multi-point logic signals and analog waveforms to detect timing issues that can affect power supply circuit breakers. Use logic probes to record relay operations on up to four channels, or use the Differential Probe P9000 for three-phase 440 v power line measurements and for support of CAT III 600 V measurement categories.




CAT IV 600 V

CAT III 600 V

9322

For high voltage measurement
DIFFERENTIAL PROBE P9000-01, P9000-02

For high voltage measurement
DIFFERENTIAL PROBE 9322

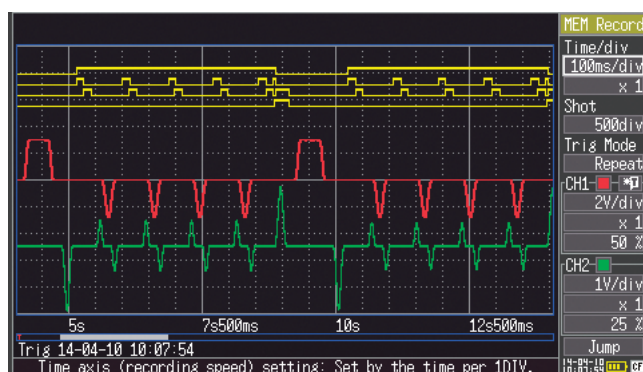

RMS
Recorder

A pen-free recorder in the palm of your hand

Long-term RMS fluctuation recording !

Pen- and paper-free recording


A substitute for the Hioki Micro HiCorder



The photo above shows the Hioki 8205-10 and 8206-10 Micro HiCorders. These products are no longer available.

RMS value calculation method

RMS values for three AC waveform cycles are calculated 1,000 times every second (see figure below). Readings other than maximum and minimum values are eliminated based on the set recording interval, and the resulting data is displayed and saved.

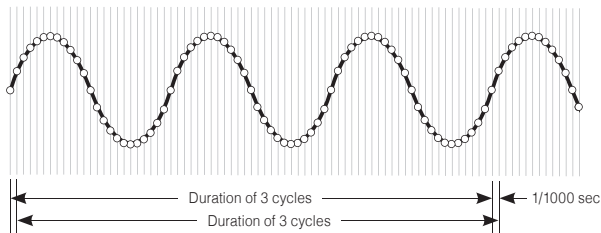

AC RMS data recording


Use the device in conjunction with an AC voltage input and a clamp current sensor to record RMS values for current. Input instantaneous waveforms are acquired via high-speed sampling at 200 μ sec. RMS data is staggered at a rate of 1000 times per second as it is computed – not even abrupt fluctuations will escape notice.

RMS data recorded in internal memory

The RMS recorder can output data into the internal memory at rates of up to once per millisecond. Internal memory recordings of up to 10,000 div (1 million data items) are supported. Furthermore, if you set automatic saving to storage media, the device writes data to the media (at each recording interval) in real time as it makes measurements.

* A new data file is created for each 10,000 div worth of data.

* It is possible to save the data repeatedly up until the media's full capacity is reached, but after that periods of dead time (when measurement is not possible) will occur every 10,000 div.

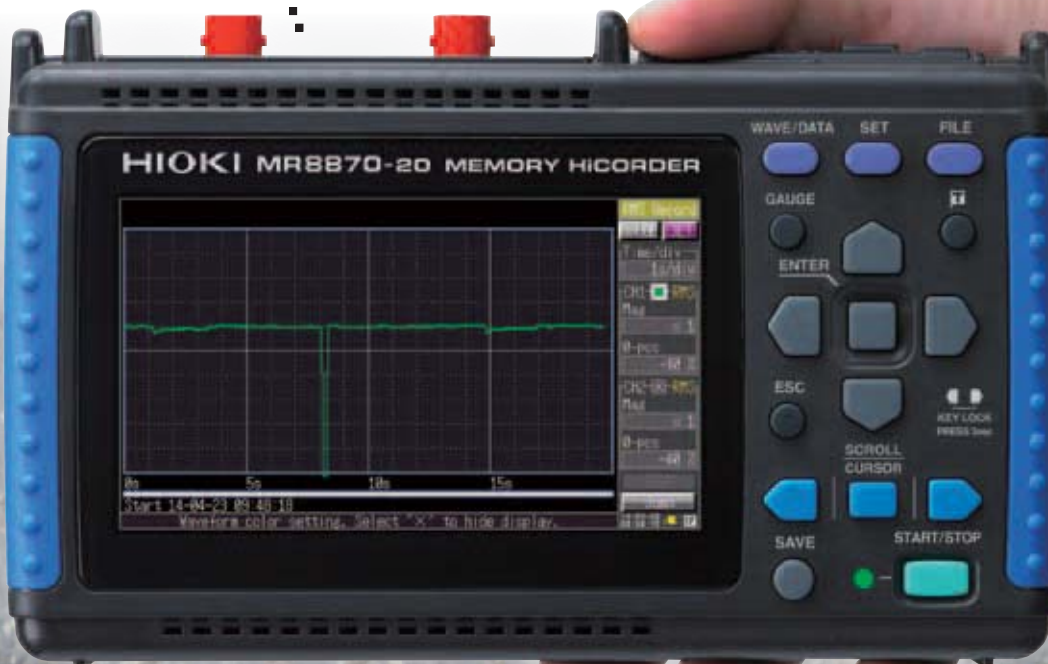

Tough & Professional

MR8870

Compact and lightweight

Small-bodied design for ease of portability

Volume is just 30% and weight just 40% of Hioki's 4-channel Memory HiCorder, the MR8880 – a 70% and 60% reduction, respectively.

A waveform measurement instrument that you can slip into your briefcase and carry anywhere. Should you suddenly discover you need it on a work trip, you can simply take it out and begin to use it, just as you would a tester.



Intuitive, no-fuss operation

Built-in Setup Wizard to help you get started

Activate the Setup Wizard



When powered on, the Settings screen appears along with the waveform monitor, and the new Setup Wizard blinks.

By activating the Setup Wizard, you can easily navigate by following the simple instructions. Soon you will be operating the device like a seasoned professional.

Real-Time waveform monitoring




The help text crawls along the bottom of the screen, describing the function of the setting at the blinking cursor.

The enhanced “Waveform Monitor” window with level meter display facilitates changes to settings by simultaneously displaying real-time input waveforms.

Select mode at start-up

No unnecessary fuss before you can start working. You select which measurement mode to use (memory recorder or RMS value recorder) when you switch on the device.

Choose the mode once, and you'll never need to select it again.

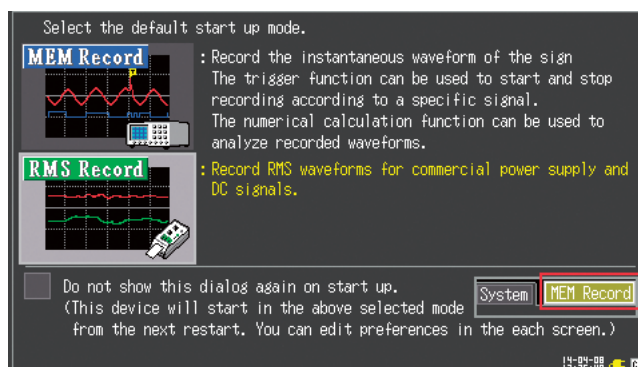

Data analysis in tandem with a PC

Dedicated PC application program bundled as standard accessory

■ Pseudo-real-time data recording to media (MEM data)

The memory recorder's instantaneous waveform recording functionality automatically saves data to storage media in a way that minimizes the interval during which the instrument cannot perform measurement while data is being saved (so-called dead time). This approach allows the instrument to


write data up to the set recording length to media in real time (for each sampling interval) while continuing measurement with a time axis setting of 50 ms/div. or slower.



■ Binary data (MEM/RMS data) loadable into PC

You can copy data saved on the CF card to a PC in two ways: via the card, or by connecting the MR8870 to the PC with a USB cable. The bundled PC application lets you display waveforms on the PC and print them out.

** The MR8870 is not provided with a communication function for controlling it from a PC connected to it with a USB cable.*

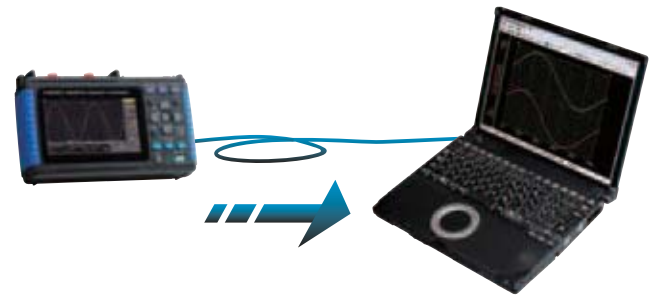


■ Synchronize two HiCorders together for 4ch recording! (MEM data)

For those times when 2-channels are just not enough, synchronize two MR8870's using the external trigger I/O terminals (apply the trigger output from one to the external trigger input of the other). Then use synchronous start to automatically record four channels of measurement data to a CF card.



- Use the bundled software to composite waveform files. For example, to monitor the waveforms of a 3P 200 V line, you can use two HiCorders at the same time and view the waveforms of all 4 channels on the same screen on the PC.



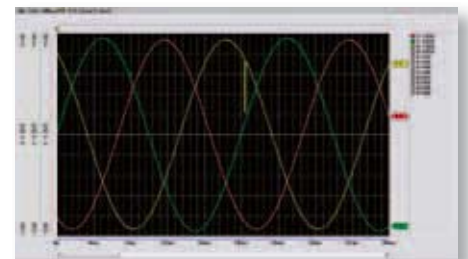


■ Waveform display and printing, and CSV conversion with PC (MEM data, RMS data)

Open a data file with the dedicated Wave Processor (PC application program) for the MR8870/8870, to import and print waveforms with your own arrow and figure annotations. Of course, screen data can be copied and pasted into common Word and Excel documents to easily create reports.

■ Features of the Dedicated Wave Processor Program (supplied accessory)

- Designed especially for MEMORY HiCORDER MR8870/8870
Application program displays and prints waveforms, and converts measurement data to CSV text files on a Windows PC.
- Provides X-Y display capability not available on the HiCorder
- Generate reports using templates, with figure annotations and entered comments
- Multiple files can be batch-converted to CSV data
- Use two HiCorders to monitor 3 or 4 channels of waveforms that are measured using the same time axis range on the same PC window.

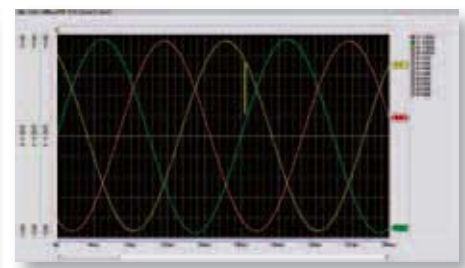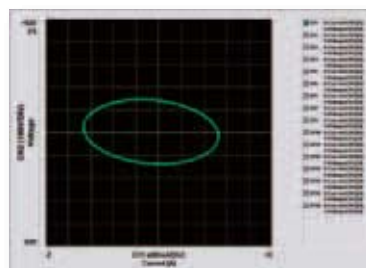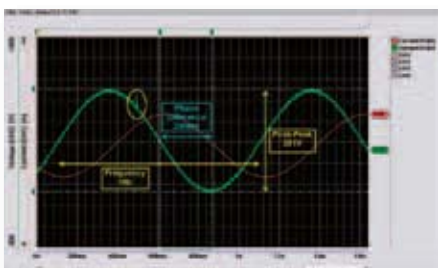

Specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Basic specifications

Measurement functions	Memory recorder (high-speed recording), RMS recorder (50/60 Hz, or DC only)
No. of channels	2 analog and 4 logic channels (For analog inputs, channels are isolated from each other and from frame GND. For logic terminals, all channels has common GND.)
Maximum sampling rate	1 MS/s (1 μ s period, all channels simultaneously)
Memory capacity	12 bits \times 2 M-Words/ch
Removable storage	CF card Type I slot (standard equipment) \times 1: Up to 2 GB, supports FAT, or FAT-32 format Memory items: Setting condition, measurement data (binary or text), screen shot, result of numerical calculation, reduced text saving data
Backup function	Clock and settings: 5 years or more (@25°C/77°F) Waveform backup function: available when Battery pack 9780 is installed with charge remaining or AC adapter is connected (up to 100 hours with fully charged battery pack).
Control terminals	Terminal block: External trigger input, trigger output
External interface	USB: USB 2.0, mini-B receptacle \times 1 port, Function: Transfer files from the installed CF card to a PC via USB cable, but communication functions such as the capability to change HiCorder settings from the PC are not provided.
Display type	4.3-inch TFT color LCD (480 \times 272 dots)
Display resolution	Waveform section: 20 div (time axis) \times 10 div (voltage axis) (1 division = 20 dots \times 20 dots)
Display languages	MR8870-20: English, Japanese (Default settings: English) MR8870-30: Chinese, English, Japanese (Default settings: Chinese) <i>Note: Korean (special order only, please contact Hioki)</i>
Environmental conditions (no condensation)	Operation: 0°C (32°F) to 40°C (104°F), 80 % rh or less Storage: -10°C (14°F) to 50°C (122°F), 80 % rh or less
Compliance standard	Safety: EN61010, EMC: EN61326, EN61000-3-2, EN61000-3-3
Power supply	• AC Adapter Z1005: 100 to 240 V AC, 50/60 Hz • Battery pack 9780: continuous operation times: approx. 2 hours (reference value at 25°C/77°F, waiting for trigger) (AC adapter has priority when used in combination with battery pack) • DC power supply: 10 to 16 V DC (please contact your Hioki distributor for connection cord, max. 3 m/9.84 ft length)
Power consumption	30 VA max. (When using the AC adapter and charging internal battery pack 9780) 10 VA max. (When using external DC power supply and charging internal battery pack 9780) 3 VA max. (When using the battery pack 9780)
Charging functions	The installed battery pack charges when the AC adapter is connected. Charging time is about 200 minutes (reference value at 25°C/77°F) <i>Notes: Charging time depends on battery condition. Charging is disabled to protect the battery at ambient temperatures out of 5°C (41°F) to 30°C (86°F).</i>
Dimensions and mass	Approx. 176 mm (6.93 in) W \times 101 mm (3.98 in) H \times 41 mm (1.61 in) D, 600 g (21.2 oz) (with the Battery pack 9780 installed)
Accessories	Instruction Manual \times 1, Measurement Guide \times 1, AC adapter Z1005 \times 1, Strap \times 1, USB cable \times 1, Application Disk (Wave Processor Program for the 8870) \times 1, Protection sheet 9809 \times 1

Trigger functions (For memory recorder only)

Trigger modes	Single, continuous
Trigger sources	Two analog channels, four logic channels, external trigger (falls below 2.5 V, or shorted terminals), ON/OFF switching of each source, AND/OR between sources, manual triggering
Trigger types (Analog)	• Level: Triggering occurs when preset voltage level is crossed (upwards or downwards) • Voltage drop: Triggering occurs when voltage drops below peak voltage setting (for 50/60 Hz AC power lines only) • Window: Triggering occurs when window defined by upper and lower limit is entered or exited
Level setting resolution	0.5% f.s. (f.s.=10 divisions)
Trigger types (Logic)	1, 0, or \times , Pattern setting
Trigger filter	Set by the number of samples, from 0 to 100 samples, in five steps
Other functions	Trigger output: open collector 5 voltage output, active low with at least 1 ms pulse width

Analog Input (Accuracy at 23 \pm 5°C/73 \pm 9°F, 80 % rh or less, after 30 minutes of warm-up time)

Measurement functions	Number of channels: 2, for voltage measurement
Input connectors	Isolated BNC connector (input impedance 1 M Ω , input capacitance 7 pF) Max. rated voltage to earth: 300 V AC, DC, CAT II (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range (at Memory recorder)	10 mV to 50 V/div, 12 ranges, full scale: 10 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500/5 kHz
Measurement resolution	1/100 of measurement range (using 12-bit A/D conversion, measurement range is \pm 10 times range value)
Highest sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Accuracy	\pm 0.5 % f.s. (after zero-adjust, in measurement range, f.s. = 10 div)
Frequency characteristics	DC to 50 kHz -3dB
Input coupling	DC / GND
Max. allowable input	400 V DC (the maximum voltage that can be applied across input pins without damage)
Display functions	• Numerical value display: instantaneously value, or RMS value (DC, or 50/60 Hz only) (cannot select at measuring) • Waveform display zoom at voltage axis \times 2 to \times 10, compression \times 1/2, \times 1/5 <i>Note: X-Y display N/A (X-Y possible on PC screen by supplied software only)</i>

Memory recorder (high-speed recording)

Measurement targets	Instantaneous waveform of DC to AC waveform recording / monitor
Time axis	100 μ s to 5 min/div (100 samples/div) 20 ranges Time axis zoom: \times 2 to \times 10 in 3 stages, compression: 1/2 to 1/1000 in 9 stages
Sampling period	1/100 of time axis range (minimum 1 μ s period)
Recording length	20 to 20,000 div, or continuous (available at 50 ms/div to 5 min/div only) <i>Note: limited by timebase, only the last 20,000 div are saved</i>
Pre-trigger	Record data from before the trigger point at 0 to 100% of the recording length in 13 stages
Calculation functions	• Numerical calculation: Up to four simultaneous calculations (common to all channels), calculation results are saved to CF card • Calculation contents: average, peak-peak, maximum and minimum values, RMS, period and frequency • Calculation range: specified by A/B cursors or whole recording length • Waveform processing: N/A

Recording Time to internal memory using memory recorder mode (abridged)

- If you set automatic saving of binary-format data to the CF card in the 50-ms/div-and-slower range of the time axis, data is saved simultaneously with measurement. This considerably reduces the amount of dead time (the period from the completion of the saving of internal memory data (of the applicable capacity below) to the CF card, to when measurement/recording begins again). This is a new function – the MR8870 is the first in the series to feature it.
- The possible length of a single measurement/recording is the length given below for the applicable time axis range.
- The maximum recording length is the same whether 1 or 2 channels are used.
- The internal memory capacity is 4 MB/channel. Media capacity depends on the card (for example, 512 MB).

Time axis	Sampling period	Recording length 20,000 div Max. 1 div = 100 sampling data
100 μ s/div	1 μ s	2s
1 ms/div	10 μ s	20s
10 ms/div	100 μ s	3min 20s
100 ms/div	1 ms	33min 20s
1 s/div	10 ms	5h 33min 20s
10 s/div	100 ms	2d 07h 33min 20s
1 min/div	600 ms	13d 21h 20min 00s
5 min/div	3.0 s	69d 10h 40min 00s

RMS recorder (high-speed recording)

Measurement targets	Commercial power line (50 \pm 1 Hz/ 60 \pm 1 Hz), DC <i>Note: Logic measurement N/A</i>
Measurement mode	Selectable for each channel (AC voltage, DC voltage, AC current, DC current)
Input ranges	Selectable for each channels on measurement mode • AC voltage: 100 V, 200 V system (400 V, 600 V system using the Differential Probe) • AC current: 10 A to 5000 A rms f.s., 10 mA rms f.s. to (depending on the current sensor in use) • DC voltage: 100 mV to 500 V f.s. (500 V to 2000 V f.s. using the Differential Probe) • DC current: 10 A to 2000 A f.s. (depending on the current sensor in use)
RMS accuracy	\pm 3.0 % f.s. (after zero-adjustment, add current sensor accuracy in use)
Recording interval	1 ms to 1 minutes in 16 stages, Sampling period: 200 μ s fixed (AC voltage / AC current: 1000 RMS data/second) Envelope mode: always ON <i>Note: Record maximum/minimum value pairs each recording interval</i>
Recording time	10,000 div <i>Note: If recording stops before 10,000 div is reached, only the data up to that point can be displayed and saved.</i>
Other functions	Time axis zoom/compression: 100 ms to 1 days/div Numerical calculation N/A
Repeating functions	Single / Repeat selectable <i>Note: external trigger terminal cannot use</i>

Recording Time to internal memory using RMS recorder mode (abridged)

- If you set automatic saving to the CF card, data is saved simultaneously with measurement at all times.
- The possible length of a single measurement/recording is the applicable time given below.
- The internal memory capacity is 4 MB/channel. Media capacity depends on the card (for example, 512 MB).

Recording interval	Sampling period	Recording length 10,000 div Max. 1 div = pair of (Max. / Min.) data \times 100
1 ms	200 μ s	16min 40s
10 ms	200 μ s	2h 46min 40s
100 ms	200 μ s	1d 3h 46min 40s
1 s	200 μ s	11d 13h 46min 40s
10 s	200 μ s	115d 17h 46min 40s
30 s	200 μ s	347d 5h 20min 0s
1 min	200 μ s	694d 10h 40min 0s

Other functions	
Convenient functionality	Setup Wizard – guides you through the settings. Waveform monitor – lets you make settings while waveforms are displayed, and reflects the changes on the display in real time.
Saving to external memory	Automatic saving of measurement data to CF card <i>Note: In the 50-ns/div-and-slower time axis range, binary-format waveform data is saved simultaneously with measurement, shortening the dead time due to writing.</i> Updating save possible (old files are deleted as new files are saved)
Cursor readout function	Readouts of potential at A/B cursor position, time since triggering, time difference and potential difference between A and B cursor positions, and frequencies at their positions
Scaling functionality	Settable for individual channels • Memory recorder: OFF, model setting, conversion ratio setting, 2-point setting method • RMS value recorder: For voltage: OFF, model setting. For current: sensor model setting.
Other functions	Comment entry, screen capture, gauges, start condition preservation, auto setup, waveform scrolling (possible during measurement)

■ Software specifications (Bundled accessory)



Wave Processor Program for the 8870 (Bundled accessory)

Supported measurement instruments	MR8870-20, 8870-20
Operating environment	Computer running under Windows 8/7 (32/64-bit), Vista (32-bit), XP
File loading	Loadable data format: Memory function data (MEM extension) of the MR8870-20/ 8870-20 Max. loadable file size: The maximum size that can be stored by the MR8870-20/ 8870-20 (subject to the capacity of the PC's operating environment) Waveform Composite Function: Composite the waveforms of up to 8 HiCorders (16 analog channels)
Overwriting save	Overwrites saved scaling and title/channel comments
Slide show display	Sequentially displays waveform files in the same folder
Text conversion	Data conversion format: Select from CSV, tab-separated or space-separated Object data range: Whole range, or between cursors Data thinning: Available by specifying interval Conversion methods: Analog waveform data to voltage values, logic data is converted to ones and zeros Conversion channels: selectable Header contents: Title, trigger date, timebase, comments, per-channel setting conditions Batch conversion: specify multiple files for batch conversion
Displaying	Display language: English or Japanese (select during installation) Waveform display: Scroll and magnify/reduce the time axis of the displayed waveform data image, move the zero position of each channel, zoom and set the vertical axis of each channel independently (variable gain) Numerical value display: included Cursor functions: Manipulate A and B cursors independently, and display time and voltage numerically. Max. displayable channels: 16 analog and 32 logic channels Gauge display: Time gauge (absolute or relative time, seconds, data points), voltage gauge (for each channel) Figure annotations: Text boxes, straight lines, arrows, circles and rectangles at any location Screen capture: Extended meta format, bitmap format Search functions: Date, maximum, minimum, level and window search Template function: Save and reload waveform file display configurations
Printing	Printer support: Color and monochrome printing on printers supported by the operating system Printable ranges: All data, screen capture and specifiable areas Print formats: Undivided, 2, 4, 8 divisions, 2, 4, 8 or 16 traces, 1, 2 or 4 XY screen, gauges, channel comments, zero-position comments, and A/B cursor values Print preview and waveform screen hard copy/logging print functions are included

■ Options specifications (Sold separately)

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 30 cm (0.98 ft), approx. 150 g (5.3 oz)
Note: The unit-side plug of the 9320-01 is different from the 9320.



LOGIC PROBE 9320-01

Function	Detection of voltage signal or relay contact signal for High/Low state recording
Input	4 channels (common ground between unit and channels), digital/contact input, switchable (contact input can detect open-collector signals) Input resistance: 1 M Ω (with digital input, 0 to +5 V) 500 k Ω or more (with digital input, +5 to +50V) Pull-up resistance: 2 k Ω (contact input: internally pulled up to +5 V)
Digital input threshold	1.4V/ 2.5V/ 4.0V
Contact input detection resistance	1.4 V: 1.5 k Ω or higher (open) and 500 Ω or lower (short) 2.5 V: 3.5 k Ω or higher (open) and 1.5 k Ω or lower (short) 4.0 V: 25 k Ω or higher (open) and 8 k Ω or lower (short)
Response speed	500 ns or lower
Max. allowable input	0 to +50 V DC (the maximum voltage that can be applied across input pins without damage)

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 1 m (3.28 ft), approx. 320 g (11.3 oz)
Note: The unit-side plug of the MR9321-01 is different from the MR9321.



LOGIC PROBE MR9321-01

Function	Detection of AC or DC relay drive signal for High/Low state recording Can also be used for power line interruption detection
Input	4 channels (isolated between unit and channels), HIGH/LOW range switching Input resistance: 100 k Ω or higher (HIGH range), 30 k Ω or higher (LOW range)
Output (H) detection	170 to 250 V AC, \pm DC 70 to 250 V (HIGH range) 60 to 150 V AC, \pm DC 20 to 150 V (LOW range)
Output (L) detection	0 to 30 V AC, \pm DC 0 to 43 V (HIGH range) 0 to 10 V AC, \pm DC 0 to 15 V (LOW range)
Response time	Rising edge 1 ms max., falling edge 3 ms max. (with HIGH range at 200 V DC, LOW range at 100 V DC)
Max. allowable input	250 Vrms (HIGH range), 150 Vrms (LOW range) (the maximum voltage that can be applied across input pins without damage)

Cable length and mass: Main unit cable 1.3 m (4.27 ft), input section cable 46 cm (1.51 ft), approx. 350 g (12.3 oz)



DIFFERENTIAL PROBE 9322 (Accuracy guaranteed for 1 year)

Functions	For high-voltage floating measurement, power line surge noise detection, RMS rectified output measurement
DC mode	For waveform monitor output, Frequency characteristics: DC to 10 MHz (\pm 3 dB), Amplitude accuracy: \pm 1 % of full scale (at max. 1000 V DC), \pm 3% of full scale (at max. 2000 V DC) (full scale: 2000 V DC)
AC mode	For detection of power line surge noise, Frequency characteristics: 1 kHz to 10 MHz \pm 3 dB
RMS mode	DC/AC voltage RMS output detection, Frequency characteristics: DC, 40 Hz to 100 kHz, Response speed: 200 ms or less (400 V AC), accuracy: \pm 1 % of full scale (DC, 40 Hz to 1 kHz), \pm 4 % of full scale (1 kHz to 100 kHz) (full scale: 1000 V AC)
Input	Input type: balanced differential input, Input impedance/capacitance: H-L 9 M Ω /10 pF, H/L-unit 4.5 M Ω /20 pF, Max. rated voltage to earth: when using grabber clip 1500V AC/DC (CAT II), 600 V AC/DC (CAT III), when using alligator clip: 1000 V AC/DC (CAT II), 600 V AC/DC (CAT III)
Max. allowable input	2000 V DC, 1000 V AC (CAT II), 600 V AC/DC (CAT III)
Output	Voltage divider for 1/1000 of input, BNC connectors (output switchable for 3 modes DC, AC, RMS)
Power source	Use the AC Adapter 9418-15, (power cannot be supplied from the logic terminals of the MR8870)

Cable length and mass: 70 cm (2.30 ft), Output side: 1.5 m (4.92 ft), 170g (6.0 oz)



DIFFERENTIAL PROBE P9000 (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Measurement modes	P9000-01: For waveform monitor output, Frequency properties: DC to 100 kHz -3 dB P9000-02: Switches between waveform monitor output/AC effective value output Wave mode frequency properties: DC to 100 kHz -3 dB, RMS mode frequency properties: 30 Hz to 10 kHz, Response time: Rise 300 ms, Fall 600 ms
Division ratio	Switches between 1000:1, 100:1
DC output accuracy	\pm 0.5 % f.s. (f.s. = 1.0 V, division ratio 1000:1), (f.s. = 3.5 V, division ratio 100:1)
Effective value measurement accuracy	\pm 1 % f.s. (30 Hz to less than 1 kHz, sine wave), \pm 3 % f.s. (1 kHz to 10 kHz, sine wave)
Input resistance/capacity	H-L: 10.5 M Ω , 5 pF or less (at 100 kHz)
Maximum input voltage	1000 V AC, DC
Maximum rated voltage to ground	1000 V AC, DC (CAT III)
Operating temperature range	-40°C to 80°C (-40°F to 176°F)
Power supply	(1) AC adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter), 0.9 VA (main unit only) (2) USB bus power (5 V DC, USB-microB terminal), 0.8 VA (3) External power source 2.7 V to 15 V DC, 1 VA
Accessories	Instruction manual \times 1, Alligator clip \times 2, Carrying case \times 1

MR8870 Options in Detail

Input cable (A)

*Voltage is limited to the specifications of the input section

Recommended

ALLIGATOR CLIP L9790-01
Red/black set attaches to the ends of the cables L9790

CONTACT PIN 9790-03
Red/black set attaches to the ends of the cables L9790

GRABBER CLIP 9790-02
Red/black set attaches to the ends of the cables L9790
*When this clip is attached to the end of the L9790, input is limited to CAT II 300 V. Red/black set.

CONNECTION CORD L9790
Flexible ϕ 4.1 mm (0.16 in) thin dia., cable allowing for up to 600 V input. 1.8 m (5.91 ft) length
*The end clip is sold separately.

Input cable (B)

*Voltage is limited to the specifications of the input section

CONNECTION CORD L9198
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 300 V input. 1.7 m (5.58 ft) length, small alligator clip

GRABBER CLIP 9243
Attaches to the tip of the banana plug cable, CAT III 1000 V, 196 mm (7.72 in) length

CONNECTION CORD L9197
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 600 V input. 1.8 m (5.91 ft) length, a detachable large alligator clips are bundled

Input cable (D)

*Voltage to ground is within this product's specifications. Separate power source is also required.

DIFFERENTIAL PROBE P9000-01
Waveform only, up to 1 kV AC/DC, band width up to 100kHz

DIFFERENTIAL PROBE P9000-02
Waveform/RMS value switchable, up to 1 kV AC/DC, band width up to 100kHz

AC ADAPTER Z1008
100 to 240 V AC

Custom cable
*For P9000. Inquire with your Hioki distributor.
(1) Bus powered USB cable
(2) USB(A)- Micro B cable
(3) 3-prong cable

Input cable (E)

*Voltage to ground is within this product's specifications. Separate power source is also required.

DIFFERENTIAL PROBE 9322
For up to 1kV AC or 2kV DC, frequency band width up to 10MHz

AC ADAPTER 9418-15
100 to 240 V AC.

Logic signal measurement

* Only the small terminal types can be used. * The 9323 is not required for the small-terminal types 9327, 9320-01, 9321-01 and MR9321-01.

LOGIC PROBE 9320-01
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)

LOGIC PROBE MR9321-01
4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)

CONVERSION CABLE 9323
*Used for connecting the 9320/9321/MR9321 and the 9324 to the Memory HiCorder with small logic terminal models



Model : MEMORY HiCORDER MR8870
Model No. (Order Code) (Note)
MR8870-20 (2ch, English model)
*Test leads are not included. Purchase the leads appropriate for your application separately

*The CF card includes a PC card adapter.
*PC Card Precaution
Use only PC Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers. You may be unable to read from or save data to such cards.

Storage media

PC CARD 2G 9830 (2 GB)
PC CARD 1G 9729 (1 GB)
PC CARD 512M 9728 (512 MB)

Power supply

*Z1005 is a bundled accessory

BATTERY PACK 9780
NiMH, Charges while installed in the main unit

AC ADAPTER Z1005
100 to 240 V AC

Other options

*The 9809 is a bundled accessory

PROTECTION SHEET 9809
For LCD protection, pairs of additional sheets

CARRYING CASE 9782
Includes compartment for options, resin-coated

SOFT CASE 9812
Includes space for small items, neoprene rubber

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length

*A separate power supply (CT955x) is required in order to use a high-precision current sensor.
*Only sensors with ME15W (12-pin) terminals (-05 type) can be connected to the CT955x.
*The separately available Conversion Cable CT9900 is required in order to use a sensor with PL23 (10-pin) terminal

POWER SUPPLY for Current Sensors

SENSOR UNIT CT9555 1ch, with Waveform output

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length

PL23 (10-pin) - ME15W (12-pin) conversion

CONVERSION CABLE CT9900
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

Up to 1000 A (High precision) *ME15W (12-pin) terminal type

High-precision pull-through type, monitor the waveforms of DC to distorted AC current

AC/DC CURRENT SENSOR 9709-05, 100 kHz band width, 500A

Monitor the waveforms of DC to distorted AC current

AC/DC CURRENT PROBE CT6844-05, 200 kHz band width, 500A

AC/DC CURRENT PROBE CT6845-05, 100 kHz band width, 500A

AC/DC CURRENT PROBE CT6846-05, 20 kHz band width, 1000A

Precautions when connecting a high-precision current sensor to a Memory HiCorder
Connecting to the MR8880/MR8875/MR8870
• High-precision current sensor (ME15W) + CT9555 + BNC cable → MR8870
• High-precision current sensor (PL23) + CT9900 + CT9555 + BNC cable → MR8870

Other current sensor types

The MR8870 can be used with various types of current sensors and probes. For details, see product information on Hioki's website.

The (CT7290 (available separately) is required in order to use these current sensors.

100 A to 2000 A (Medium speed)

AC/DC CURRENT SENSOR CT7631, (Auto zero CT7731)
DC, 1 Hz to 10 kHz (-3dB), 100 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7636, (Auto zero CT7736)
DC, 1 Hz to 10 kHz (-3dB), 600 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7642, (Auto zero CT7742)
DC, 1 Hz to 10 kHz (5 kHz), 2000 A, 1 mV/A output

DISPLAY UNIT CM7290
Provides measurement, display, and output functionality when used with the CT7000s.

DISPLAY UNIT CM7291
with built-in Bluetooth® Smart

500 A to 5000 A *For commercial power lines, 50/60 Hz

CLAMP ON PROBE 9018-50
Good phase characteristics, Frequency characteristics: 40 Hz to 3 kHz, 10 to 500 A AC range, output 0.2 V AC f.s.

CLAMP ON PROBE 9132-50
Frequency characteristics: 40 Hz to 1 kHz, 20 to 1000 A AC range, output 0.2 V AC f.s.

AC FLEXIBLE CURRENT SENSOR CT9667-01/-02/-03
10 Hz to 20 kHz, 5000 A/ 500 A AC, 500 mV/f.s. output, ϕ 100 to 254 mm (3.94 to 10.00 in), 3 loop diameters

Leak Current *For commercial power lines, 50/60 Hz

CLAMP ON LEAK HITESTER 3283
10 A range/10 μ A resolution to 200 A range, with monitor/analog output 1 V f.s.

OUTPUT CORD L9095
Connect to BNC terminal, 1.5 m (4.92 ft) length

AC ADAPTER 9445-02
For USA, 100 to 240 V AC, 9 V/ 1 A

AC ADAPTER 9445-03
For EU 100 to 240 V AC, 9 V/ 1 A

Non-contact Voltage measuring

NON-CONTACT AC VOLTAGE PROBE SP3000-01
5 Vrms rated, 10 Hz to 100 kHz band width

NON-CONTACT AC VOLTAGE PROBE SP3000
Sold individually

AC VOLTAGE PROBE SP9001
Sold individually

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

MEMORY HiCORDER MR8875

High-Speed Data Logger



1000 V Direct Input Multi-channel Logger

- **As a Multichannel Logger**

The MR8875 delivers multichannel measurement capability in a compact, A4-size footprint that ensures easy portability. Depending on which input modules are installed, measurement capabilities range from 16 analog channels to 60 thermocouple temperature measurement channels.

- **As a Super-High-Speed Logger**

The MR8875 can simultaneously sample all channels in as little as 2 μ sec.

Sample up to 2 channels in 2 μ sec or up to 60 channels in 50 μ sec while writing data continuously to an SD memory card in real time. * Operation is guaranteed only with a genuine Hioki SD memory card.

- **As a Long-Term Continuous Recording Logger**

Real-time saving to SD card

At an interval of 100 msec, the MR8875 can record 8 channels of data for 155 days or 60 channels of data for 20 days. * Operation is guaranteed only with a genuine Hioki SD memory card.

- **Introducing a new input module that accepts up to 1000 V input and measures in RMS**


Select and install four input modules from a large selection. The MR8875 lets you mix and match modules to measure voltage, temperature, strain, and CAN signals or measure sensor output signals at a high, 16-bit resolution.

CE

User-selectable input modules for more applications! A compact solution for multichannel measurement

Industrial Robots

Voltage Temperature Control Signals Strain

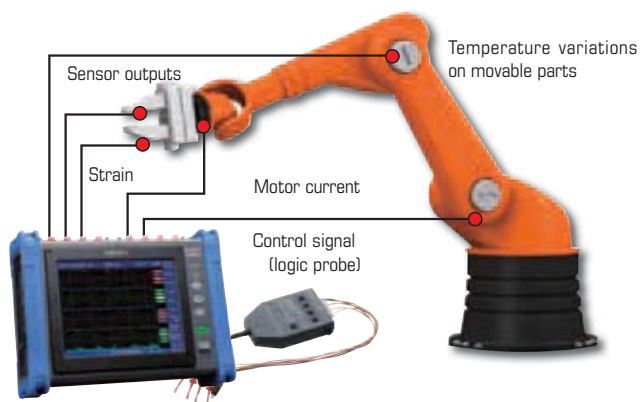

The plug-in module-based architecture means you can mix and record a variety of signals across multiple channels - ideal for verifying the operation of multi-axis robots.

Example of module combinations

Analog Unit MR8901	× 2
Voltage/Temp Unit MR8902	× 1
Strain Unit MR8903	× 1

R&D or Science Experiments

Voltage Temperature



With its multichannel, long-term recording capabilities, the **MR8875** is ideally suited for use in development applications such as performance and durability testing.

- Record sensor output.
- Evaluate sensors and other devices.
- Use as an X-Y recorder (flatbed).

Example of module combinations

Analog Unit MR8901	× 2
Voltage/Temp Unit MR8902	× 2

Development of Construction Machinery, Agricultural Machinery, and Automobiles

Voltage Temperature Strain



Enhanced environmental temperature and vibration resistance enable the **MR8875** to withstand harsh measurement environments.

Example of module combinations

Analog Unit MR8901	× 1
Voltage/Temp Unit MR8902	× 1
Strain Unit MR8903	× 1
CAN Unit MR8904	× 1


Applications

High-speed Data Recorder MR8875

For inverter and motor testing

High-voltage input (MR8905)

Primary- and secondary-side measurement of UPS power supply and commercial power supply transformers
Record inverter primary- and secondary-side waveforms

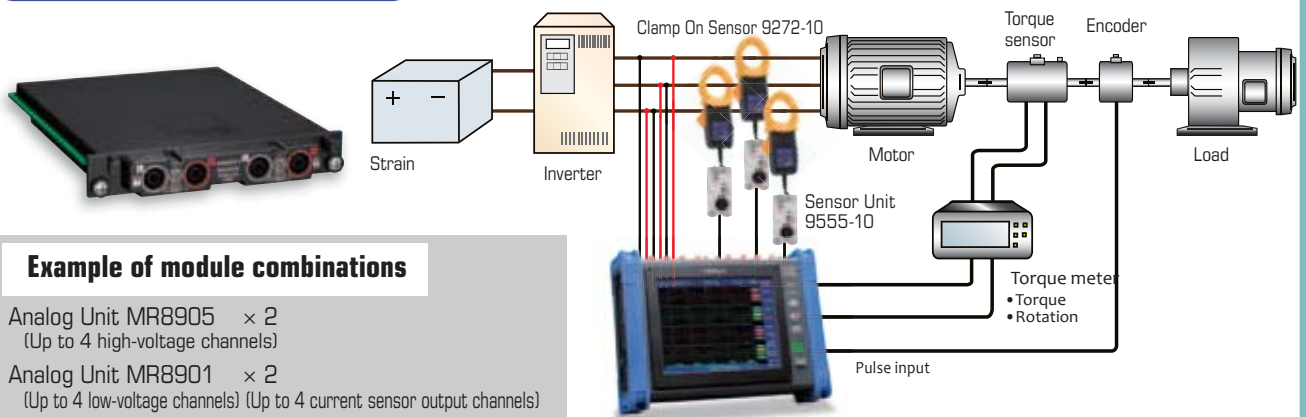

Example of module combinations


- Analog Unit MR8905 × 2
(Up to 4 high-voltage channels)
- Analog Unit MR8901 × 2
(Up to 4 low-voltage channels) (Up to 4 current sensor output channels)

Testing of EV batteries

1000 V DC (CAT II)

Measure ECU and EV inverter output waveforms

With the MR8905 Analog Unit, the MR8875 can measure the voltage of individual battery cells—a process that requires high precision and high resolution—at 16 bits of resolution (1/1250 of the range). The instrument can measure signals of up to 1000 V DC directly.

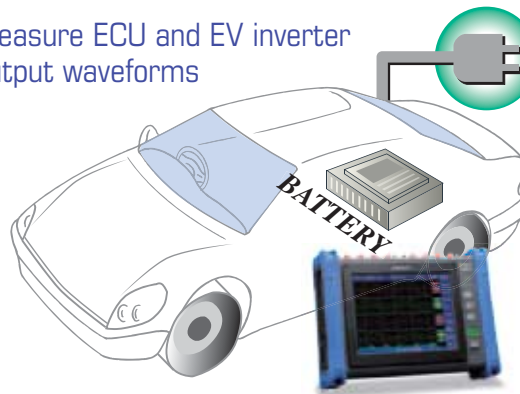


- Battery evaluation
(Example of control signal and charge/discharge time measurement)

Testing of power equipment

600 V AC (CAT III)

Characteristics testing of power equipment (Load rejection and circuit breaker testing)



- Load rejection testing
Analyze the correlations among factors such as the generator voltage before and after circuit-breaker operation, degree of variability in RPM, governor servo operating status, and pressure regulator operation timing.

1 Real-Time Saving to SD Card in High Resolution

Collect physical signals at a 500 kS/s sampling rate with a high resolution of 25,000 points f.s.

The same working principle as that of a digital oscilloscope is used to record data to the large-capacity internal memory at high speed. The sampling rate is 500 kS/s (2 μs period) on all channels simultaneously. Sensor signal waveforms are recorded and represented faithfully. Furthermore, a 16-bit A/D resolution ensures even subtle changes in the sensor signals are not missed.

Internal memory
8MW/unit


Ultra-high speed SD data recorder is a vast improvement over legacy products

The MR8875 takes advantage of revolutionary SD card technologies to offer faster real-time saving to a memory card from as fast as 2 μs intervals (operation is guaranteed only with a genuine HIOKI SD memory card). When the recording period (sampling rate) is 50 μs or less, data for all 60 channels can be recorded continuously over a long period.



Maximum recordable time to an 2GB SD memory card


- * Since the header information is included, actually recordable measurement data is approximately 90% of the times shown in the table below. The upper limit is 1,000 days but operation is guaranteed for 1 year.
- * The recording interval is limited depending on the number of measurement ON channels.
- * Built-in logic, pulses P1 and P2 each use the capacity equivalent to one analog channel.

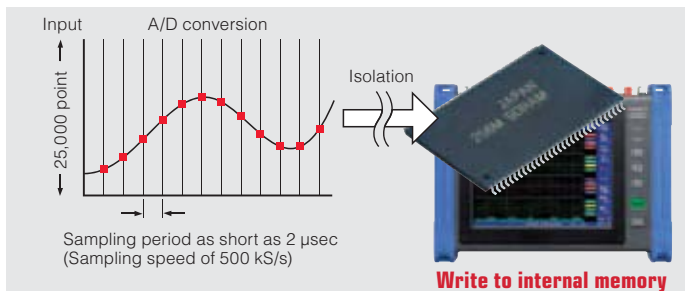

Maximum time to record to the internal storage memory (Abridged)

- * The maximum number of channels to be used is 16 because memory for recording to the internal memory is allocated to each input module.
- * Built-in logic, and pulses P1 and P2 each use the capacity equivalent to one analog channel.

Time axis (Abridged)	Sampling	No. of channels to be used		
		1 ch	3 to 4 ch	9 to 16 ch
200 μs/div	2 μs	80,000div	20,000div	5000div
1 ms/div	10 μs	16 s	4s	1s
10 ms/div	100 μs	1 min 20 s	20s	5s
100 ms/div	1 ms	13 min 20 s	3min 20s	50s
1 s/div	10 ms	2 h 13 min 20 s	33min 20s	8min 20s
10 s/div	100 ms	22 h 13 min 20 s	5h 33min 20s	1h 23min 20s
100 s/div	1.0 s	9 d 06 h 13 min 20 s	2d 07h 33min 20s	13h 53min 20s
5 min/div	3.0 s	277d 18h 40min	69d 10h 40min	17d 08h 40min

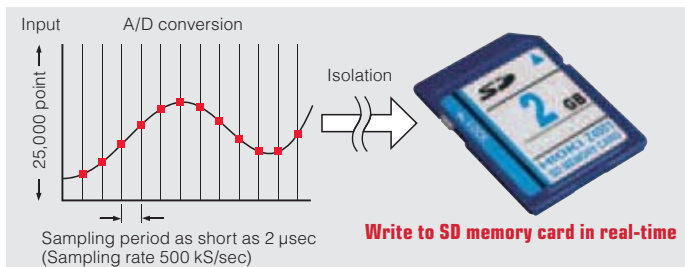

Time axis	Recording intervals	1 ch	2 ch	4 ch	8 ch	16 ch	30 ch	60 ch
200 μs/div	2 μs	35 min 47 s	17 min 53 s	Not applicable	Not applicable	Not applicable	Not applicable	Not applicable
500 μs/div	5 μs	1 h 29 min 28 s	44 min 44 s	22 min 22 s	11 min 11 s	Not applicable	Not applicable	Not applicable
1 ms/div	10 μs	2 h 58 min 57 s	1 h 29 min 28 s	44 min 44 s	22 min 22 s	11 min 11 s	Not applicable	Not applicable
2 ms/div	20 μs	5 h 57 min 54 s	2 h 58 min 57 s	1 h 29 min 28 s	44 min 44 s	22 min 22 s	11 min 55 s	Not applicable
5 ms/div	50 μs	14 h 54 min 47 s	7 h 27 min 23 s	3 h 43 min 41 s	1 h 51 min 50 s	55 min 55 s	29 min 49 s	14 min 54 s
10 ms/div	100 μs	1 d 05 h 49 min 34 s	14 h 54 min 47 s	7 h 27 min 23 s	3 h 43 min 41 s	1 h 51 min 50 s	59 min 39 s	29 min 49 s
20 ms/div	200 μs	2 d 11 h 39 min 08 s	1 d 05 h 49 min 34 s	14 h 54 min 47 s	7 h 27 min 23 s	3 h 43 min 41 s	1 h 59 min 18 s	59 min 39 s
50 ms/div	500 μs	6 d 05 h 07 min 50 s	3 d 02 h 33 min 55 s	1 d 13 h 16 min 57 s	18 h 38 min 28 s	9 h 19 min 14 s	4 h 58 min 15 s	2 h 29 min 07 s
100 ms/div	1 ms	12 d 10 h 15 min 41 s	6 d 05 h 07 min 50 s	3 d 02 h 33 min 55 s	1 d 13 h 16min 57 s	18 h 38 min 28 s	9 h 56 min 31 s	4 h 58 min 15 s
200 ms/div	2 ms	24 d 20 h 31 min 23 s	12 d 10 h 15 min 41 s	6 d 05 h 07 min 50 s	3 d 02 h 33 min 55 s	1 d 13 h 16 min 57 s	19 h 53 min 2 s	9 h 56 min 31 s
500 ms/div	5 ms	62 d 03 h 18 min 29 s	31 d 01 h 39min 14 s	15 d 12 h 39 min 14 s	7 d 18 h 24 min 48 s	3 d 21 h 12 min 24 s	2 d 01 h 42 min 36 s	1 d 00 h 51min 18 s
1 s/div	10 ms	124 d 06 h 36 min 58 s	62 d 03 h 18 min 29 s	31 d 01 h 39 min 14 s	15 d 12 h 49 min 37 s	7 d 18 h 24 min 48 s	4 d 03 h 25 min 13 s	2 d 01 h 42 min 36 s
2 s/div	20 ms	248 d 13 h 13 min 56 s	124 d 06 h 36 min 58 s	62 d 03 h 18 min 29 s	31 d 01 h 39 min 14 s	15 d 12 h 49 min 37 s	8 d 06 h 50 min 27 s	4 d 03 h 42 min 36 s
5 s/div	50 ms	621 d 09 h 04 min 51 s	310 d 16 h 32 min 25 s	155 d 08 h 16 min 12 s	77 d 16 h 08 min 06 s	38 d 20 h 04 min 03 s	20 d 17 h 06 min 09 s	10 d 08 h 33 min 04 s
10 s/div	100 ms	Upper limit 1000 days	621 d 09 h 04 min 51 s	310 d 16 h 32 min 25 s	155 d 08 h 16 min 12 s	77 d 16 h 08 min 06 s	41 d 10 h 12 min 19 s	20 d 17 h 06 min 09 s
30 s/div	300 ms	Upper limit 1000 days	Upper limit 1000 days	932 d 01 h 37 min 16 s	466 d 00 h 48 min 38 s	233 d 00 h 24 min 19 s	124 d 06 h 36 min 58 s	62 d 03 h 18 min 29 s
50 s/div	500 ms	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	776 d 17 h 21 min 04 s	388 d 08 h 40 min 32 s	207 d 03 h 01 min 37 s	103 d 13 h 30 min 48 s
60 s/div	600 ms	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	932 d 01 h 37 min 17 s	466 d 00 h 48 min 38 s	248 d 13 h 13 min 56 s	124 d 06 h 36 min 48 s
100 s/div	1.0 s	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	776 d 17 h 21 min 04 s	414 d 06 h 03 min 14 s	207 d 03 h 01 min 37 s
2 min/div	1.2 s	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	932 d 01 h 07 min 17 s	497 d 02 h 27 min 53 s	248 d 13 h 13 min 56 s
5 min/div	3.0 s	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	Upper limit 1000 days	621 d 09 h 04 min 51 s

2 Multichannel Mixed Measurement of Various Signals

Install input modules according to your specific needs

- The **MR8875** uses a plugin unit-type input amp setup that allows users to select the input unit that's appropriate for their measurement objective. In addition, it's easy to change input units after purchase.
- The Analog Unit **MR8905**, which can accommodate high voltages and which allows direct input of up to 1,000 V (CAT II) or 600 V (CAT III), is available for high-voltage applications. In addition to instantaneous waveforms, measurement of RMS level waveforms is also supported (starting with Ver. 2.14/3.14 of the **MR8875**).
- Even the standard input unit supports 1,000 V (CAT III) measurement if used with the newly developed Differential Probe P9000 series of small probes.
- For high-sensitivity measurement, use the Strain Unit **MR8903**, which features 1 mV f.s. operation (for a maximum resolution of 0.04 μ V). Measurement of minuscule sensor output is also supported.



Recorder accepts direct pulse input or standard logic probe terminals

The **MR8875** offers two standard pulse input channels that allow for inputting no-voltage a- and b-contacts, open collector, or voltage. Signals transmitted as pulses, such as those of rotation number and flow rate, can be measured or counted. Use a logic probe for the ON/OFF (logic) signal waveforms of a relay and PLC. Two types of logic probes are available depending on the signal format.



Support for a wide variety of measurement items

(Model MR8875 ships standard with pulse input capability. Logic input requires optional logic probe.)

Measurement target	Input unit	Measurement range	Resolution	Sampling	Frequency characteristics
Rotation	Standardly equipped with pulse input	5000 (r/s) f.s.	1 (r/s)	10 msec (100 S/s)	N/A
Pulse totalization	Standardly equipped with pulse input	65,535 to 3,276,750,000 counts f.s.	1 count	N/A	N/A
Relay contacts, voltage on/off	Logic Probe 9320-01	Depends on logic probe in use * Max. input 50 V, threshold +1.4/ +2.5/+4.0 V * Non-voltage contact, short/open	N/A	2 μ sec (500 kS/s)	500 nsec or lower response
AC/DC voltage on/off	Logic Probe MR9321-01	Depends on logic probe in use * Detect presence of AC/DC voltages of up to 250 V.	N/A	2 μ sec (500 kS/s)	3 msec or lower response


Note: Power line frequency, duty ratio and pulse width measurements are not supported.



The Analog Unit MR8905 does not include input cables. Separate purchase of the optional Connection Cable Set L4940 (x 2) and Alligator Clip Set L4935 (x 2), which consists of clips that fit onto the ends of the cables, is required.



The Differential Probe P9000 can be used with the standard Analog Unit MR8901 to enable high-voltage, 1,000 V (CAT III) measurement. The P9000-02 further enables RMS level measurement of AC power lines.

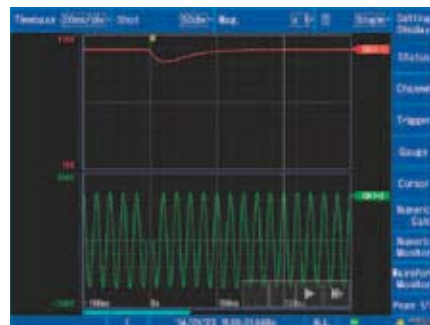

• Example of instrument recording the instantaneous waveform and RMS level waveform during a momentary outage of an AC power supply (using the MR8905)



• Multi-channel timing measurement using logic waveform measurement

Pulse input terminal

Take advantage of the frequency dividing function, settable from 1 to 50,000 counts, to take direct readings from an encoder that outputs multi-point pulses according to the rotation number.



Two line pulse inputs (Common GND)



3 Touch Screen for Intuitive Operation


Touch screen interface improves operating efficiency

Buttons on the MR8875 are kept to a minimum by utilizing touch screen technology. The high-definition 8.4-inch high-brightness TFT color LCD is the interface of choice for improving productivity by offering a more intuitive experience than traditional input methods. While the connection terminals are located at the top panel of the MR8875, when cables need to be connected from the bottom, simply swipe the screen from top to bottom at either edge and the screen will rotate correspondingly. The MR8875 can be set in a position that is easier to use according to the installation location.



Touch to scroll back or scale the waveform

Display earlier waveforms during recording without stopping measurement by simply touching the scroll icons on the screen. You can also scale the waveform amplitude by just swiping through the waveform up (to zoom in) or down (to zoom out).

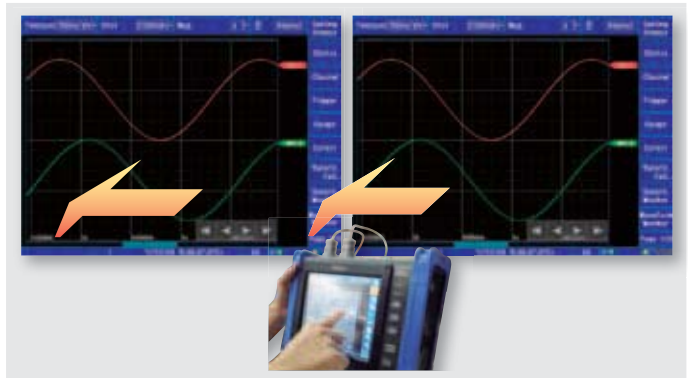


Advanced cursor read function for multichannel analysis

Six cursors A, B, C, D, E, and F are available, compared with the conventional A- and B-cursors.

Use the cursors to measure and display the following:


- A, B, C, and D: Potential and time from the trigger
- E and F: Potential
- A-B and C-D cursors: Time difference and potential difference
- E-F cursors: Potential

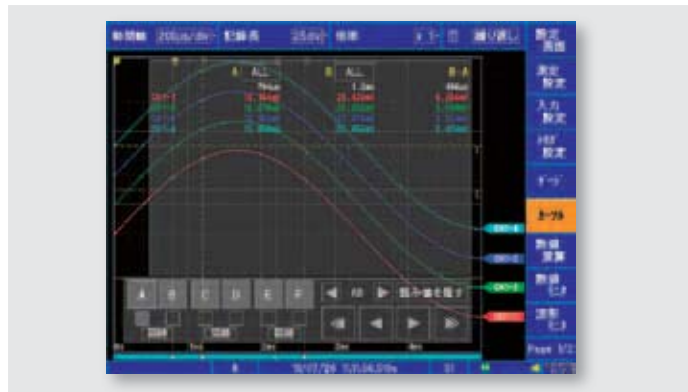

Split screen, sheet display, event mark input, and jump functions indispensable for efficient analysis

Split screen and sheet display functions are provided to support multiple channels. Individual display formats can be selected and an application can be assigned to each sheet for analysis, increasing productivity.

★ For long-term recordings, tag important points with event markers. Up to 1000 markers can be placed so that you can quickly jump to them later for detailed analysis.

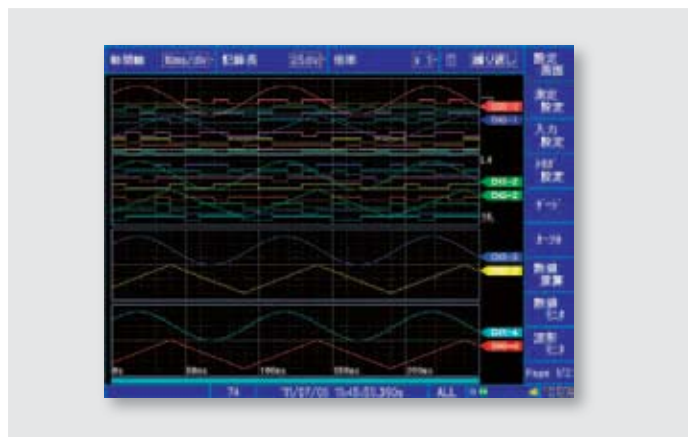


4 Computer Analysis via LAN, SD, and USB memory interfaces

LAN-compatible Web/FTP server function and waveform/CSV conversion using supplied standard software Wv

Take advantage of the built-in 100BASE-TX LAN interface to network with the PC:

<WEB server> Use the Web Server function to view waveforms and remotely control the **MR8875** with your PC's web browser

<FTP server> Use the FTP server function to copy the data stored in memory (SD card, USB memory, or internal storage memory) to the PC. View waveforms for binary data acquired with the **MR8875** on a PC, or convert data to CSV using the free WaveViewer (Wv) application for further analysis in Excel. Download the latest version of the WaveViewer from the HIOKI website at www.hioki.com.

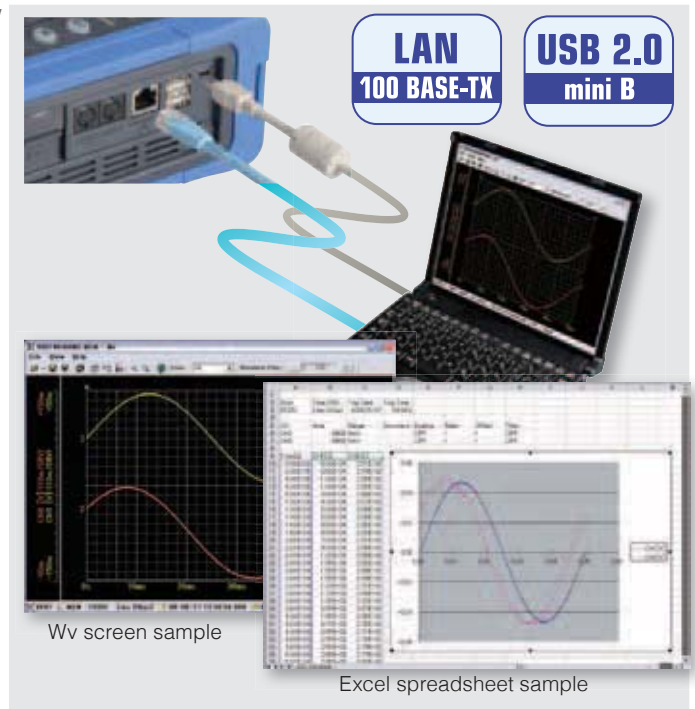

Remotely control the MR8875 using the Web server function

Use a typical web browser to see the screen of the **MR8875** on your PC with no other special software

required. Make settings, acquire data, and monitor the screen with ease.

Note: Waveform data cannot be acquired from the internal memory during measurement.


Transfer data using FTP

After measurement is finished, data is transferred automatically to the FTP server that is running on the PC. Data can also be transferred manually.

Download data using FTP

Measurement data in files on recording media and in the internal memory can be acquired from a PC.

Note: Waveform data cannot be acquired from the internal memory during measurement.

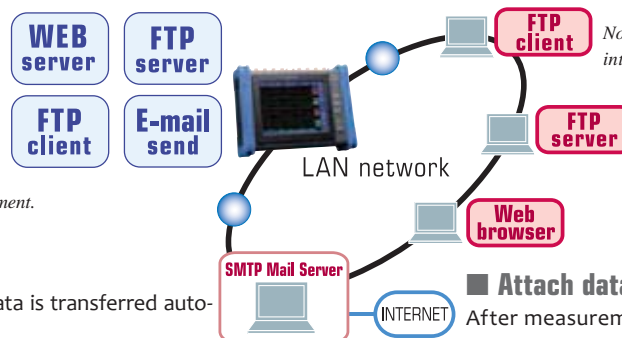

Attach data to E-mail

After measurement is finished, you can automatically send the captured data as an e-mail attachment. Data can also be transferred manually.

Save data to the USB memory or SD card

Convenient USB memory*1 or SD memory cards can be used to copy data stored in the internal storage memory to the PC. Data stored in the **MR8875**'s SD card can also be downloaded to the PC using a USB cable.*2

*1 Data can be saved to USB memory. However, it is recommended to use a genuine Hioki SD card for which operation is guaranteed to ensure data protection.

*2 Direct download from USB memory to a PC via a USB cable is not supported - please use a LAN connection and the FTP server.



FFT Analysis Function

MR8875 Ver. 2.01 or later

Simultaneously measure four phenomena

The MR8875's FFT analysis function can simultaneously analyze four phenomena with a single measurement.

By performing FFT analysis of different signal inputs from channels 1 through 4, it is possible to analyze the frequency components of each channel occurring at the same time.

Additionally, you can simultaneously view the linear spectrum, RMS spectrum, power spectrum, and phase spectrum for a signal input to channel 1, for example.


Analysis functionality for a variety of measurement scenarios

The MR8875 features calculation functions that are often used during field measurements. The linear spectrum is used in analysis that focuses on waveform amplitude values, while the power spectrum is used in analysis that focuses on energy, for example noise and vibration measurement. You can select the calculation function that best suits your application— for example, use a transfer function for measurement that identifies internal systems based on I/O characteristics.



Peak value display function (marker display)

The peak value display function can be used to search for maximum and local maximum values and then display them. Characteristic values can be easily displayed even without using a cursor. Since the MR8875 stores up to 200 frames (200 calculation results) of data, it will automatically search for the peak value again if a different frame is selected.


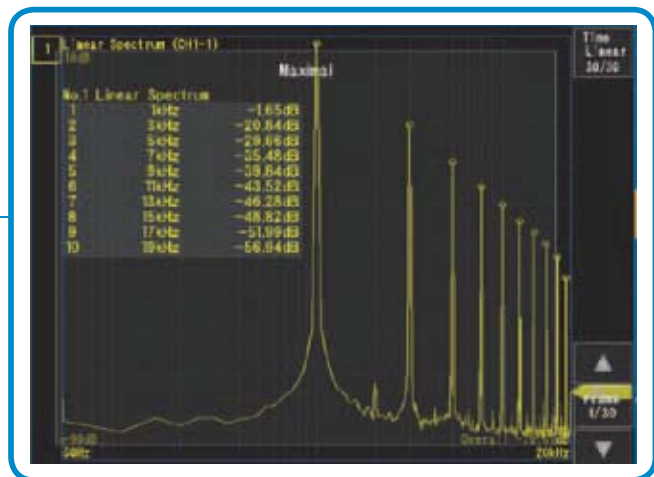


Running spectrum display function

The MR8875's running spectrum display function can be used to continuously display spectra that change over time. Up to 200 frames* of the most recent calculation results can be stored. Although Hioki's MR8847 Series only supports running spectrum display for certain types of calculations, the MR8875 can generate this display with all FFT calculation functions. Additionally, if the selected frame is changed, the cursor value can also be loaded.

* Frame data is stored in the instrument's internal memory, regardless of whether the running spectrum display is used.

The MR8875 can also freeze the spectrum display on its screen during measurement. This function allows data to be observed without the inclusion of unneeded information on the screen or in the data. All calculation results can be output as CSV data, which can be loaded into a spreadsheet application such as Microsoft Excel and used to create a three-dimensional graph.

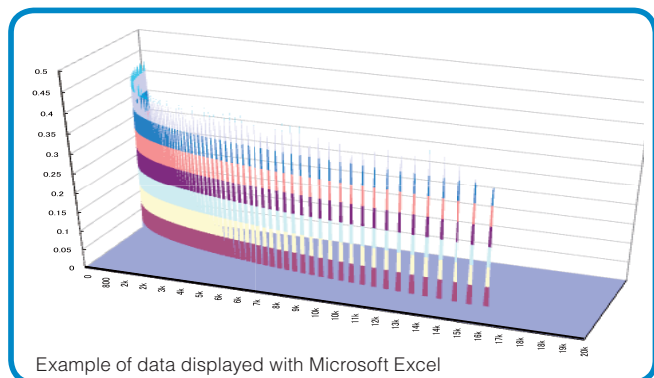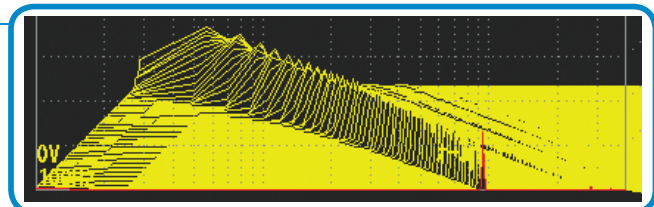

Extensive window functions

The MR8875 provides a total of seven window functions, including rectangular and Hanning variants. The rectangular function is used for analysis that focuses on spectrum amplitude values, while the Hanning function is used for analysis that focuses on the degree of spectral separation of frequency components. Additionally, by using an exponential window in impact measurement utilizing an impulse hammer, the instrument enables more precise analysis by limiting unneeded noise components on the time axis.

Continuous calculation function

When analyzing a signal that changes over time, the number of FFT calculation points becomes a limitation, preventing the waveform from being analyzed in all time domains. Furthermore, using too many FFT points prevents the desired results from being obtained because the spectrum is averaged. The MR8875 resolves these problems with its continuous calculation function. For data covering extended periods of time, calculation points can be shifted by a number of skip points* at a uniform interval. Moreover, calculations for up to 200 frames can be accomplished with a single operation. Calculation results for different time periods can be reviewed by changing the calculation frame, regardless of whether you're using the running spectrum display or a single-screen display.

* The number of skip points can be set from 100 to 10,000.


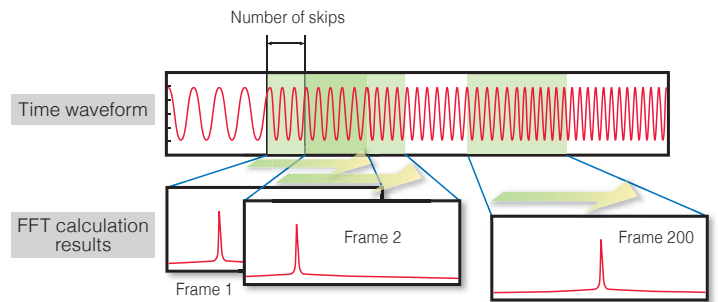


Illustration of continuous calculation


Overlay display function

The MR8875's overlay display function can be used to observe variations in waveforms captured using continuous measurement over time. Although previous Hioki models have not been able to overlay FFT calculations, the MR8875 offers this capability, improving the visibility of analysis.

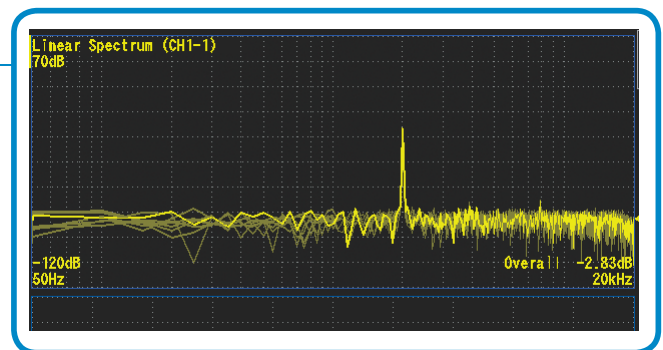

Visually appealing screen displays

The MR8875's display can be switched according to the application at hand. For example, its single-screen display can be used when focusing on the correlation between channels, while its four-screen display can be used to isolate complex spectra for viewing. Additionally, time and spectrum waveforms can be displayed above and below one another when focusing on correlation with a captured time waveform.

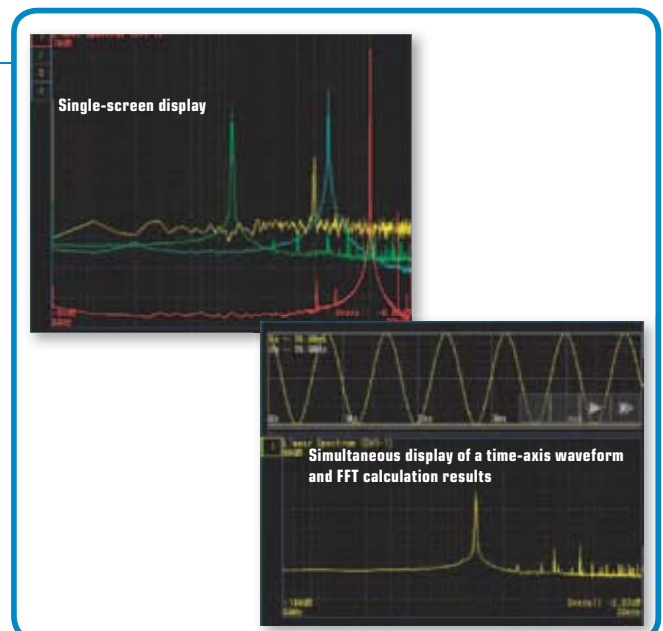

Waveform Calculation Function


MR8875 Ver. 2.01 or later

Real-time inter-channel calculation

The MR8875 features a new real-time inter-channel calculation* function that allows you to observe and record results for up to two calculations on the same input module while measurement continues.

* Between channels on the same input module only (supported input modules: MR8901/8902/8903).

* Calculations between different modes on the MR8902/8903 (voltage and temperature, etc.) are not supported.

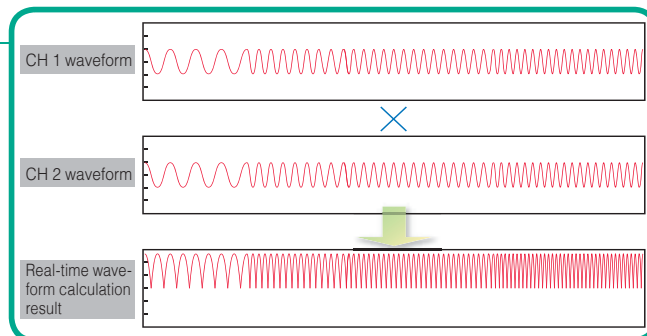

Waveform-dimension calculations

The previous MR8875 firmware version only supported calculations that generated values such as averages and RMS values, but the new version can process for up to eight calculations simultaneously, including the four arithmetic operations as well as differential-integral and other waveform-dimension calculations.


Digital filter calculations

The MR8875 offers new digital filter calculations* as part of its selection of waveform processing calculations, allowing the necessary bandwidth portion of a waveform containing noise to be calculated and the resulting waveform displayed.


* Finite impulse response (FIR) and infinite impulse response (IIR) digital filters are offered. LPF (passing only the low-frequency component), HPF (passing only the high-frequency component), BPF, and BEF (passing or rejecting only a frequency bandwidth of a certain width) variants of each can be configured.

* Although FIR calculation processing is time-consuming, it can yield waveforms with no phase distortion. By contrast, IIR calculation yields results at a relatively faster calculation speed but is prone to phase distortion. Each filter's cutoff frequency is use-specified.

Results of measuring a distorted waveform containing noise



Results of a calculation-based simulation of a waveform from which high-frequency distortion has been rejected by passing it through a low-pass filter.

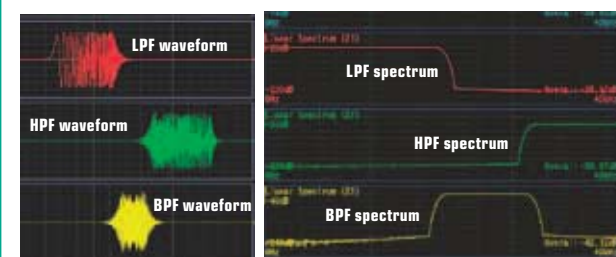

Principle FFT calculation functions

Calculation points	1,000	✓
	2,000	✓
	5,000	✓
	10,000	✓
	20,000	N/A
Window functions	Rectangular window	✓
	Hanning	✓
	Hamming	✓
	Blackman	✓
	Blackman-Harris	✓
	Flat top	✓
Display	Exponential	✓
	Amplitude	✓
	Real part	✓
	Imaginary part	✓
	Nyquist	N/A
Averaging	Peak value display	Local maximum Maximum
	Running spectrum (spectrogram)	✓ (200 lines)
	Phase highlighting	N/A
	Screen segmenting	1-/2-/4-screen waveform display
Averaging	Time (simple)	N/A
	Time (exponential)	N/A
	Frequency (simple)	✓
	Frequency (exponential)	✓
	Frequency (peak hold)	✓


Principle FFT calculation functions

Analysis functions	Storage waveform	N/A
	Frequency distribution	N/A
	Linear spectrum	✓
	RMS spectrum	✓
	Power spectrum	✓
	Power spectrum density	N/A
	LPC analysis	N/A
	Transfer function	✓
	Cross power spectrum	✓
	Impulse response	N/A
Other	Coherence function	✓
	Phase spectrum	✓
	Auto-correlation function	N/A
	Cross-correlation function	N/A
	1/1-octave analysis	N/A
	1/3-octave analysis	N/A
	Frequency range	1.33 mHz to 400 kHz
	Max. number of simultaneous functions	✓
	Calculations targeting thinned data	N/A
	Recalculation after changing number of calculation points	N/A
Other	Total harmonic distortion (THD) analysis	✓
	Overall value	✓
	Anti-aliasing filter (AAF)	N/A
	Window function energy correction	✓
	dB scaling	✓
	Continuous calculation	✓
	Calculation precision	32-bit floating point (IEEE single-precision)

7 CAN Signal Input for Vehicle Testing

Synchronized mixed recording of CAN data and real data such as voltage, temperature, or distortion signals

CAN bus signals that are used widely, particularly in automotive applications, can be recorded, analyzed, converted to analog waveforms, and viewed. Simultaneous recording and viewing of analog waveforms from sensors, in addition to the CAN data, allows you to check the impact of noise and level changes on the communication data.

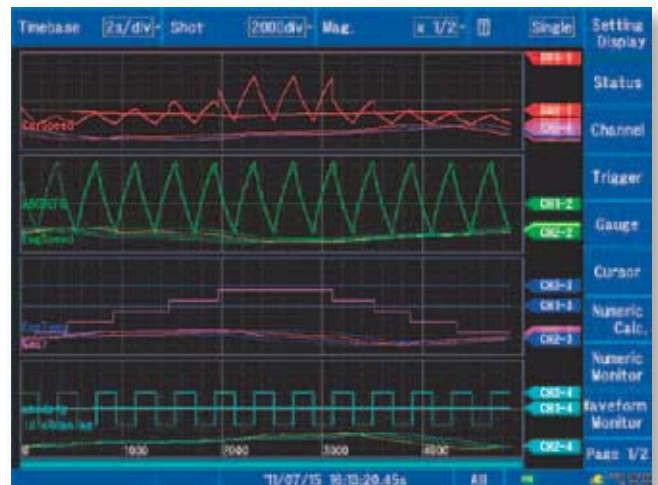

Vector's CAN database can be loaded using supplied software

Industry standard CANdb® database files can be loaded into the supplied setting software and associated to the CAN channel signals. CAN messages can be viewed using the customer-specified message and signal names, as well as scaled engineering units. Since parameters such as signal data type, start bit, length, and byte sequence are all pre-defined in CANdb, users can concentrate on their measurement tasks without needing to define signals.



CAN editor (bundled software)

Withstand extreme environmental temperatures, vibrations, and data loss due to power outages

In road tests, extreme environmental conditions associated with the temperature and vibration are harsh for measuring instruments. The **MR8875** has the wide operating temperature range of -10°C to 50°C and is compliant with the JIS D1601 standard for vibration resistance performance. It is designed to withstand the harsh conditions for in-vehicle measurement.

In the event of a power outage while data is being recorded, the power supply is maintained using a built-in large-capacity capacitor until data is completely written to the SD or USB memory. Risk of data loss or damage to the file system is minimized, and after power is restored, measurement can be restarted automatically.



Basic Specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Measurement function	High-speed recording
No. of input modules that can be installed	Up to 4 slots, user installable in any combination by plugging into the main unit [MR8901 ×4]: 16 analog channels + standard 8 logic and 2 pulse channels [MR8905 ×4]: 8 analog channels + standard 8 logic and 2 pulse channels [MR8902 ×4]: 60 analog channels + standard 8 logic and 2 pulse channels [MR8903 ×4]: 16 analog channels + standard 8 logic and 2 pulse channels [MR8904 ×4]: 8 CAN ports (analyzed 60 analog + analyzed 64 logic ch) + standard 8 logic and 2 pulse channels * For analog units, channels are isolated from each other and from the MR8875's GND. For CAN unit ports or standard logic terminals or standard pulse terminals, all channels have common GND.
Max. sampling rate	MR8901/MR8905: 500 kS/s (2 μs period, all channels simultaneously) MR8902: 10 msec (channel scanning) MR8903: 200 kS/s (5 μs period, all channels simultaneously) External sampling: 200 kS/s (5 μs period)
Storage memory capacity	Total 32 M-words (memory expansion: none, 8 MW/module) * 1 word = 2 bytes, therefore 32 Mega-words = 64 Mega-bytes. * Memory can be allocated depending on the number of channels used at each input module
External storage	SD card slot ×1, USB memory stick (USB 2.0 standard) * FAT-16 or FAT-32 format on SD or USB
Backup functions (At 23°C/ 73°F)	Clock and parameter setting backup: at least 10 years Waveform backup function: none
Interfaces	LAN ×1: 100BASE-TX (DHCP, DNS supported, FTP server/ client, Web server, send E-mail, command control) USB series mini-B receptacle × 1 (setting and measurement by communications commands, transfer data from SD card to a PC) USB series mini-A receptacle × 2 (USB memory stick, USB mouse, USB keyboard)
External control connectors	External trigger input, trigger output, external sampling input, pulse input ×2, external input ×3, external output ×2
External power supply	Three lines, +5V, 2A total output * Connectable to three 9322 differential probes via power cord 9328
Operating temperature and humidity (No condensation)	Temperature: -10°C to 40°C (14°F to 104°F), 80 % rh or less 40°C to 45°C (104°F to 113°F), 60 % rh or less 45°C to 50°C (113°F to 122°F), 50 % rh or less When powered by the battery pack: 0°C to 40°C (32°F to 104°F), 80 % rh or less When charging the battery pack: 10°C to 40°C (50°F to 104°F), 80 % rh or less Storage: -20°C to 40°C (-4°F to 104°F), 80 % rh or less 40°C to 45°C (104°F to 113°F), 60 % rh or less 45°C to 50°C (113°F to 122°F), 50 % rh or less Battery pack storage: -20°C to 40°C (-4°F to 104°F), 80 % rh or less
Applicable standards	Safety: EN61010-1, EMC: EN61326, EN61000-3-2, EN61000-3-3
Compliance standards	Anti-vibration: JIS D1601: 1995 5.3 (1) Corresponds to Class 1: a passenger car, Condition: class A
Power supply	AC adapter Z1002: 100 to 240 V AC (50/60 Hz) Battery Pack Z1003: 7.2 V DC Continuous operation times: one hour with back light ON (AC adapter has priority when used in combination with battery pack) DC power supply: 10 to 28 V DC (please contact your Hioki distributor for connection cord)
Charging function (At 23°C/ 73°F)	Recharging time: Approx. 3 hours (using the AC adapter and main unit to recharge the Battery Pack Z1003)
Power consumption	When using the AC adapter Z1002, or external DC power supply: 56 VA When using the battery pack: 36 VA
Dimensions and mass	Approx. 298W × 224H × 84D mm (11.73W × 8.82H × 3.31D in), 2.4 kg (84.7 oz), (excluding input modules and battery pack) Reference data: 2.75 kg (97.0 oz, excluding input modules and including battery pack), 3.47 kg (122.4 oz, including MR8901 ×4 and battery pack)
Supplied accessories	Instruction manual ×1, Measurement guide ×1, AC adapter Z1002 ×1, Protection sheet ×1, USB cable ×1, Shoulder strap ×1, Application disk (Wave viewer Wv, communication commands table, CAN Editor) ×1

Display

Display type	8.4 inch SVGA-TFT color LCD (800 × 600 dots, with touch screen), (time axis 25 div × voltage axis 20 div, X-Y waveform 20 div × 20 div)
Screen settings	Waveform split screen (1, 2, or 4), X-Y 1 & X-Y 2 screens, time axis + X-Y waveform screen, sheet display (sheet all, sheet 1 to 4 selectable)
Screen display types	<ul style="list-style-type: none"> Waveform display Simultaneous waveform and gauge display Simultaneous waveform, gauge, and settings display Simultaneous waveform and numerical calculation results display Waveform and A/B, C/D, E/F cursor values displayed at the same time Simultaneous waveform and instantaneous value display
Waveform monitor	See waveform without recording (setting screen, waiting for trigger screen)
Real-time value monitor	Values for all channels can be monitored during measurement (Instantaneous value, average value, P-P value, Max. value, Min. value)
Display functions (Ver. 1.00 or later)	<ul style="list-style-type: none"> Waveform scroll (scroll backwards through the display trend graph to view pas waveforms even while recording) Event marker input and jump functions (up to 1000 markers) Waveform inversion (positive/ negative) Cursor readout (use A/B/C/D/E/F cursors) Vernier display (fine amplitude adjustment)
Display functions (Ver. 2.01 or later)	<ul style="list-style-type: none"> Waveform zoom (splits the screen vertically; supports waveform magnification and overall display) Waveform overlay (select from off, overlay for each measurement, overlay at user-selected timing) Waveform history (up to 16 past data sets can be selected and displayed.)

Measurement function (High-speed recording)

Time axis	200 μs, 500 μs/div, 1 ms to 500 ms/div, 1 s to 5 min/div, 21 ranges, external sampling (max. 200 kS/s), Recording interval time at real-time save ON: 2 μs/S (channels up to 2), 5 μs/S (channels up to 8), 10 μs/S (channels up to 16), 20 μs/S (channels up to 30), 50 μs/S (channels up to 64), 100 μs/S (with no limit on number of channels in use)
Accuracy of time axis	± 0.0005 %
Time axis resolution	100 points /div
Recording length (with MR8901 × 4, logic and pulse inputs OFF)	25 to 20,000 div *1 *2, 50,000 div *3, or user-configurable from 5 to 80,000 div *3 in 1 div increments *1: 4 ch/module, *2: 2 ch/module, *3: 1 ch/module
Waveform expansion, compression	Time axis: ×10 to ×2 or ×1, ×1/2 to ×1/50,000 Voltage axis: ×100 to ×2, ×1, ×1/2 to ×1/10 Upper and lower limit settings, or position setting
Pre-trigger	(Trigger timing: At start) Pre-trigger data can be recorded for an interval set in steps ranging from 0 to 100 % of the recording length.
Post-trigger	(Trigger timing: At stop) Post-trigger data can be recorded for an interval set in steps ranging from 0 to 40 % of the recording length
Real-time data save	ON /OFF selectable (exclusive real-time save or automatic save) Function: Waveforms are saved as binary data to the SD memory card at each interval (Note: Cannot save in real-time to a USB memory, use only SD memory cards sold by Hioki) Endless loop saving: New file overwrites the oldest file when the SD memory card capacity runs short (Note: Delete files only at saved repeat trigger mode) Normal saving: Saving stops when the SD memory card capacity is full
Auto data save	Select from Off, waveform data (Binary or CSV), numerical calculation results, and image data (compressed BMP or PNG). Function: Data are saved to either SD memory card or USB memory stick at once after the specified recording length is acquired. Endless loop saving: New file overwrites the oldest file when the SD memory card or USB memory capacity runs short Normal saving: Saving stops when the SD memory card or USB memory capacity is full
Data protection	In the event of a power outage during saving to storage media, the file is closed and then the power is shut down. Note: This function is enabled 15 minutes after the power is turned on.
Loading data from media	<ul style="list-style-type: none"> Binary data stored in the SD memory card or the USB memory stick can be recalled by the MR8875 internal storage memory Waveform data saved in real time to the SD memory card can be loaded starting at a specified position up to the maximum storage memory capacity.
Memory segmentation	N/A

Trigger functions

Mode	Single, Repeat
Timing	Start / Stop / Start & Stop (separate trigger conditions can be set to start and stop)
Trigger sources	<ul style="list-style-type: none"> Trigger source selectable for each channel (Free-running when all trigger sources are off) Analog input: Select up to 4 channels for each module Inter-channel calculation results: W1-1 to W4-2 (Ver.2.01 or later) Logic input: LA1 to LA4, LB1 to LB2 (4 channels × 2 probes), CAN L1 to L6 (for each MR8904 CAN Unit). Pattern triggers can be configured for each of the above trigger sources. Pulse input: P1, P2 (2 channels) External input: Input signal to external trigger terminal Logical AND/ OR of all sources Forced trigger execution: Priority over any other trigger source Interval trigger: Trigger is activated at recording start, and again at each set interval
Trigger types (Analog, pulse)	<ul style="list-style-type: none"> Level: A trigger is applied when rise or fall to set voltage value. Window: Set the upper and lower limits of trigger level
Trigger types (Logic)	<ul style="list-style-type: none"> Logic pattern: Settable to 1, 0, or × for each logic probes The trigger condition (AND/OR) can be set between logic input channels in each probe.
Trigger types (External input)	<ul style="list-style-type: none"> Rise or fall selectable (max. allowable input voltage 10 V DC) Rising: A trigger is applied when rise from "Low" (0 to 0.8 V) to "High" (2.5 to 10 V) Falling: A trigger is applied when fall from "High" (2.5 to 10 V) to "Low" (0 to 0.8 V) or terminal short. External trigger filter and response pulse width: When external filter Off: H period 1 ms or greater, L period 2 μs or greater When external filter On: H period 2.5 ms or greater, L period 2.5 ms or greater
Trigger level resolution	<ul style="list-style-type: none"> Analog: 0.1 % f.s. (f.s.=20 div) Note: With the CAN Unit MR8904, resolution fluctuates according to the bit length defined by the CAN Pulse integration: 0.002 % f.s., Pulse rotation count: 0.02 % f.s. (f.s.=20 div)
Trigger filter	Set by number of samples (Off, 10 to 1000 points)
Trigger output	<ul style="list-style-type: none"> Open drain output (with 5 voltage output, active Low) Output voltage: 4.0 to 5.0 V (high level), 0 to 0.5 V (low level) Output pulse width: Selectable level or pulse Level: Sampling period × (number of data since trigger -1) or longer (2 μs or longer) Pulse: 2 ms ±10%

Calculation functions	
Real-time inter-channel calculations (Ver.2.01 or later)	<ul style="list-style-type: none"> Up to 2 calculations per module can be performed simultaneously. Calculation target: Analog Unit MR8901, Voltage/Temp Unit MR8902, Strain Unit MR8903 <i>Inter-channel calculations are limited to single module.</i> <i>Scaling and probe settings for calculation channels targeted for calculations are disabled.</i> <i>Calculation results can be scaled.</i> <i>Calculations between different modes on the MR8902 and MR8903 are not supported.</i> Calculations: Addition, subtraction, multiplication
Numerical calculation	<ul style="list-style-type: none"> Up to 8 calculations can be performed simultaneously Calculation target: Internal memory Calculations: Average, effective (rms), peak to peak, maximum value, time to maximum value, minimum value, time to minimum value, period, frequency, rise time, fall time, area value, X-Y area value, standard deviation, specified level time, specified time level, pulse width, duty ratio, pulse count, time difference, phase difference, high-level, low-level, four arithmetic operations, Calculation results can be saved to SD memory card or USB memory stick. Calculation range: Select from all measurement data or between A/B or C/D cursors Automatic storing of calculation results in CSV format to the SD card or the USB memory stick.
Waveform calculations (Ver.2.01 or later)	<ul style="list-style-type: none"> Up to 8 calculations can be performed simultaneously. Calculation target: Internal memory Calculations: Basic arithmetic, absolute value, exponents, common logarithms, square roots, differentials (1st and 2nd order), integrals (1st and 2nd order), moving averages, time-axis moving averages, trigonometric operations (SIN, COS, TAN), inverse trigonometric operations (ASIN, ACOS, ATAN), FIR filter operations, IIR filter operations, average value, maximum value, minimum value, level at time Calculation range: All measurement data; areas between the A/B and C/D cursors can be selected.
FFT calculations (Ver.2.01 or later)	<ul style="list-style-type: none"> Up to 4 calculations can be performed simultaneously. Calculation target: Internal memory Calculation modes: Single, repeat Number of points: 1000 to 10000 Number of skips: Automatic, 100 to 10000 <i>Can be set only when the calculation mode is "Repeat".</i> Window functions: Rectangular window, Hanning, Hamming, Blackman, Blackman-Harris, flat top, exponential Averaging: Off, simple average, indexed average, peak hold Compensation: None, power, average Peak value display: Off, local maximum value, maximum value Analysis mode: Off, linear spectrum, RMS spectrum, power spectrum, transmission function, cross-power spectrum, coherence function, phase spectrum Display scale: Linear scale, log scale
Evaluation	Calculation result evaluation output: GO/NG (with open-drain 5 V output)

Other functions	
External sampling	Maximum input: Up to 10 V DC Maximum input frequency: 200 kHz Input signal condition: High level 2.5 to 10 V, Low level 0 to 0.8 V, Pulse width H or L 2.5 μ s or longer
Other	<ul style="list-style-type: none"> Scaling, Comment entry, Select from time, date, and number of data for the horizontal axis display, Key lock Beep sound ON/OFF Auto range setting (automatically sets the best suitable sampling rate and amplitude range) Hold start condition (when the power is interrupted during recording, measurement automatically resumes after power is restored) Auto set up (automatically load setting files stored in internal memory or the SD card) Save the setting condition in internal memory (up to 6 conditions) Manual data save


Pulse input section		
No. of channels	2 channels, push button type terminal, not isolated (common GND with main unit)	
Mode	Rotation, Integration	
Measurement functions	<ul style="list-style-type: none"> Divided rotation: 1 to 50,000 count (Rotation number: number of pulses per rotation; Integration: number of pulses per count) Timing: Select from "starting the count at the trigger" or "at the start of measurement" Integration mode: Select from "integration from the start of measurement" or "instantaneous value at each sampling period" Processing of integration overflows: Select either "value returns to 0 and counting continues" or "the overflow state persists" 	
Input form	<ul style="list-style-type: none"> No-voltage 'a' contact (normally open contact), No-voltage 'b' contact (normally short contact), Open collector or voltage input Input resistance: 1.1 MΩ 	
Max. allowable input	0 V to 50 V DC (max. voltage between input terminals that does not cause damage)	
Max. rated voltage between channels	Not isolated (common GND with main unit)	
Max. rated voltage to earth	Not isolated (common GND with main unit)	
Detect level	4 V: (High: over 4.0 V, Low: 0 to 1.5 V) 1 V: (High: over 1.0 V, Low: 0 to 0.5 V)	
Pulse input period	With filter Off: 200 μ s or more (both H and L periods must be at least 100 μ s) With filter On: 100 ms or more (both H and L periods must be at least 50 ms)	
Slope	Count at rising edge, or count at falling edge	
Filter	Chatter prevention filter (On/Off switchable)	
Setting range	Resolution	Measurement range
2,500 c /div	1 c/LSB	0 to 65,535 c
25k c /div	10 c/LSB	0 to 655,350 c
250k c /div	100 c/LSB	0 to 6,553,500 c
5M c /div	2k c/LSB	0 to 131,070,000 c
125M c /div	50k c/LSB	0 to 3,276,750,000 c
Rotation: 250 [r/s]/div	1 [r/s]/LSB	0 to 5,000 [r/s]

Maximum time to record to the internal storage memory


* The maximum number of channels to be used is 16 because memory for recording to the internal memory is allocated to each input module.
 * Built-in logic, and pulses P1 and P2 each use the capacity equivalent to one analog channel.

Number of channels to be used * Number of channels for input module with most enabled measurement channels	9 to 16 ch		5 to 8 ch		3 to 4 ch		2 ch		1 ch	
	Time axis	Sampling	5000 div	10,000 div	20,000 div	40,000 div	80,000 div	5000 div	10,000 div	20,000 div
200 μ s/div	2 μ s	1 s	2 s	4 s	8 s	16 s	32 s	200 μ s	2 μ s	1 s
500 μ s/div	5 μ s	2.5 s	5 s	10 s	20 s	40 s	80 s	500 μ s	5 μ s	2.5 s
1 ms/div	10 μ s	5 s	10 s	20 s	40 s	1 min 20 s	2 min 40 s	1 ms	10 μ s	5 s
2 ms/div	20 μ s	10 s	20 s	40 s	1 min 20 s	2 min 40 s	5 min 20 s	2 ms	20 μ s	10 s
5 ms/div	50 μ s	25 s	50 s	1 min 40 s	3 min 20 s	6 min 40 s	13 min 20 s	5 ms	50 μ s	25 s
10 ms/div	100 μ s	50 s	1 min 40 s	3 min 20 s	6 min 40 s	13 min 20 s	26 min 40 s	10 ms	100 μ s	50 s
20 ms/div	200 μ s	1 min 40 s	3 min 20 s	6 min 40 s	13 min 20 s	26 min 40 s	52 min 40 s	20 ms	200 μ s	1 min 40 s
50 ms/div	500 μ s	4 min 10 s	8 min 20 s	16 min 40 s	33 min 20 s	1 h 06 min 40 s	2 h 13 min 20 s	50 ms	500 μ s	4 min 10 s
100 ms/div	1 ms	8 min 20 s	16 min 40 s	33 min 20 s	1 h 06 min 40 s	2 h 13 min 20 s	4 h 26 min 40 s	100 ms	1 ms	8 min 20 s
200 ms/div	2 ms	16 min 40 s	33 min 20 s	1 h 06 min 40 s	2 h 13 min 20 s	4 h 26 min 40 s	8 h 53 min 20 s	200 ms	2 ms	16 min 40 s
500 ms/div	5 ms	41 min 40 s	1 h 23 min 20 s	2 h 46 min 40 s	5 h 33 min 20 s	11 h 06 min 40 s	22 h 13 min 20 s	500 ms	5 ms	41 min 40 s
1 s/div	10 ms	1 h 23 min 20 s	2 h 46 min 40 s	5 h 33 min 20 s	11 h 06 min 40 s	22 h 13 min 20 s	44 h 26 min 40 s	1 s	10 ms	1 h 23 min 20 s
2 s/div	20 ms	2 h 46 min 40 s	5 h 33 min 20 s	11 h 06 min 40 s	22 h 13 min 20 s	44 h 26 min 40 s	88 h 53 min 20 s	2 s	20 ms	2 h 46 min 40 s
5 s/div	50 ms	6 h 56 min 40 s	13 h 53 min 20 s	27 h 46 min 40 s	55 h 33 min 20 s	111 h 06 min 40 s	222 h 13 min 20 s	5 s	50 ms	6 h 56 min 40 s
10 s/div	100 ms	13 h 53 min 20 s	27 h 46 min 40 s	55 h 33 min 20 s	111 h 06 min 40 s	222 h 13 min 20 s	444 h 26 min 40 s	10 s	100 ms	13 h 53 min 20 s
30 s/div	300 ms	1 d 17 h 40 min	3 d 11 h 20 min	6 d 22 h 40 min	13 d 21 h 20 min	27 d 18 h 40 min	54 d 13 min 20 s	30 s	300 ms	1 d 17 h 40 min
50 s/div	500 ms	2 d 21 h 26 min 40 s	5 d 18 h 53 min 20 s	11 d 13 h 46 min 40 s	23 d 03 h 33 min 20 s	46 d 07 h 06 min 40 s	92 d 14 h 13 min 20 s	50 s	500 ms	2 d 21 h 26 min 40 s
60 s/div	600 ms	3 d 11 h 20 min	6 d 22 h 40 min	13 d 21 h 20 min	27 d 18 h 40 min	54 d 13 min 20 s	108 d 6 min 40 s	60 s	600 ms	3 d 11 h 20 min
100 s/div	1.0 s	5 d 18 h 53 min 20 s	11 d 13 h 46 min 40 s	23 d 03 h 33 min 20 s	46 d 07 h 06 min 40 s	92 d 14 h 13 min 20 s	184 d 26 min 40 s	100 s	1.0 s	5 d 18 h 53 min 20 s
2 min/div	1.2 s	6 d 22 h 40 min	13 d 21 h 20 min	27 d 18 h 40 min	54 d 13 min 20 s	111 d 02 h 40 min	222 d 04 min 40 s	2 min	1.2 s	6 d 22 h 40 min
5 min/div	3.0 s	17 d 08 h 40 min	34 d 17 h 20 min	69 d 10 h 40 min	138 d 21 h 20 min	277 d 18 h 40 min	554 d 00 min 40 s	5 min	3.0 s	17 d 08 h 40 min

External appearance and dimensions

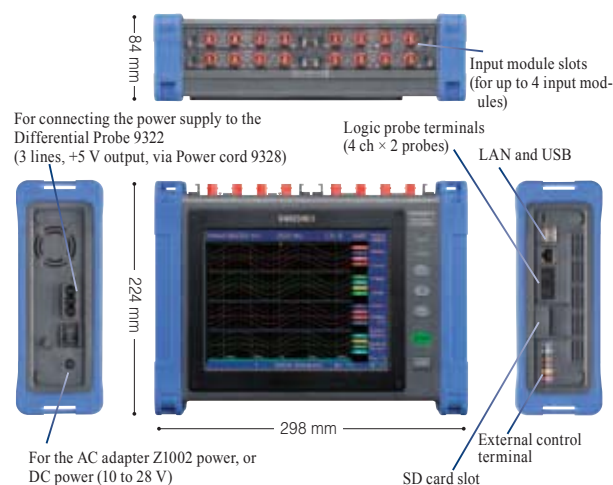

Options specifications (sold separately)



Plug-in slot for the input modules



Measurement target	Input module	Measurement range	Resolution
Voltage	Analog Unit MR8901	100 mV f.s. to 200 V f.s.	4 μ V
	Analog Unit MR8905	10 V f.s. to 1000 V f.s.	400 μ V
	Voltage/Temp Unit MR8902	10 mV f.s. to 100 V f.s.	0.5 μ V
	Strain Unit MR8903	1 mV f.s. to 20 mV f.s.	0.04 μ V
Current	Analog Unit MR8901 + optional current sensor	Depends on current sensor(s) in use * Certain current sensors require a separate power supply	1/1250 div
RMS AC voltage	Analog Unit MR8905	10 V rms f.s. to 700 V rms f.s.	400 μ V
	Analog Unit MR8901 + optional Differential Probe 9322	100 V rms to 1 kV rms	1/1250 div
Temperature (Thermocouple)	Voltage/Temp Unit MR8902	200 °C f.s. to 2000 °C f.s. * Upper and lower limit values depend on the thermocouple in use	0.01 °C
Distortion, Stress	Strain Unit MR8903	400 μ ε to 20,000 μ ε f.s.	0.016 μ ε
Analyze CAN signals	CAN Unit MR8904	2 ports /unit *Up to 15 analog channels each equivalent to a 16-bit analog signal *Up to 16 logic channels each equivalent to a 1-bit logic signal	N/A
Relay contacts, voltage on/off	Logic Probe 9320-01	Depends on logic probes in use * Max. input 50 V, threshold +1.4/+2.5/+4.0 V * Contact short/open, non voltage	N/A
AC/DC voltage on/off	Logic Probe MR9321-01	Depends on logic probes in use * Up to 250V AC/DC, detect live or not live	N/A

Dimensions, mass: Approx. 119.5W × 18.8H × 151.5D mm (4.70W × 0.74H × 5.96D in), Approx. 180 g (6.3 oz) Accessories: None



Analog Unit MR8901 (Accuracy at 23 ± 5 °C/73 ± 9 °F, 20 to 80 % rh after 30 min. of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Functions	No. of channels: 4, for voltage measurement
Input connectors	Isolated BNC connector (input resistance 1 M Ω , input capacitance 10 pF) Max. rated voltage to earth: 100 V AC, DC (with input isolated from the main unit, the max. voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	5 mV to 10 V/div, 11 ranges, full scale: 20 div * AC voltage can be measured/displayed: up to 140 V rms at $\times 1/2$ amplitude compression, but limited to 100 V rms according as max. rated voltage to earth
Low-pass filter	Low-pass filter: 5/50/500 Hz, 5 kHz, OFF
Resolution	1/1250 of measurement range (using 16-bit A/D converter)
Highest sampling rate	500 kS/s (simultaneous sampling across 4 channels)
Accuracy	±0.5 % of full scale (with filter 5 Hz, Zero position accuracy included)
Frequency characteristics	DC to 100 kHz -3 dB
Input coupling	DC/GND
Max. allowable input	150 V DC (the max. voltage that can be applied across input pins without damage)

Dimensions, mass: Approx. 119.5W × 18.8H × 184.8D mm (4.70W × 0.74H × 7.28D in), Approx. 190 g (6.7 oz) Accessories: Ferrite clamp $\times 2$



Voltage/Temp Unit MR8902 (Accuracy at 23 ± 5 °C/73 ± 9 °F, 20 to 80 % rh after 30 minutes of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Functions	No. of channels: 15, for voltage/temperature measurement (selectable for each channels)
Input connectors	Voltage/thermocouple input: push button terminal Recommended wire diameter: single-wire ϕ 0.32 mm to ϕ 0.65 mm, stranded wire 0.08 to 0.32 mm ² (conductor wire diameter min. ϕ 0.12 mm), AWG 28 to 22 Input resistance: 1 M Ω Max. rated voltage to earth: 100 V AC, DC (with input isolated from the main unit, the max. voltage that can be applied between input channel and chassis and between input channels without damage)
Voltage measurement ranges	500 μ V to 5 V/div, 9 ranges, full scale: 20 division * The AC instantaneous voltage waveform cannot be measured due to the slow sampling speed. Resolution: 1/1000 of measurement range (using 16-bit A/D converter) Accuracy: ±0.1 % f.s. (with digital filter ON, Zero position accuracy included)
Temperature measurement range	Reference junction compensation: Internal/ External (selectable) Thermocouple broken-wire detection: ON/OFF (selection applies to entire unit) Thermocouple type: K, J, E, T, N, R, S, B, WRe5-26 * For thermocouple measurement ranges, resolution, and accuracy, refer to the specifications table below
Digital filter	50 Hz, 60 Hz, or OFF
Data refresh rate	10 ms (with filter OFF, burn-out detection OFF) 20 ms (with filter OFF, burn-out detection ON) 500 ms (with filter ON, data refresh rate: Fast) 2 s (with filter ON, data refresh rate: Normal)
Max. allowable input	100 V DC (the max. voltage that can be applied across input pins without damage)

MR8902 specifications

Thermocouples	Setting ranges (full scale=20 div)	Resolution	Measurement ranges	Accuracy
K	10 °C/div	0.01 °C	-100 to less than 0 °C	±0.8 °C
			0 to 200 °C	±0.6 °C
	50 °C	0.05 °C	-200 to less than -100 °C	±1.5 °C
			-100 to 1000 °C	±0.8 °C
	100 °C	0.1 °C	-200 to less than -100 °C	±1.5 °C
			-100 to 1350 °C	±0.8 °C
J	10 °C/div	0.01 °C	-100 to less than 0 °C	±0.8 °C
			0 to 200 °C	±0.6 °C
	50 °C	0.05 °C	-200 to less than -100 °C	±1.0 °C
			-100 to 1000 °C	±0.8 °C
	100 °C	0.1 °C	-200 to less than -100 °C	±1.5 °C
			-100 to 1200 °C	±0.8 °C
E	10 °C/div	0.01 °C	-100 to less than 0 °C	±0.8 °C
			0 to 200 °C	±0.6 °C
	50 °C	0.05 °C	-200 to less than -100 °C	±1.5 °C
			-100 to less than 0 °C	±0.8 °C
	100 °C	0.1 °C	-200 to less than -100 °C	±1.5 °C
			-100 to less than 0 °C	±0.8 °C
T	10 °C/div	0.01 °C	-100 to less than 0 °C	±0.8 °C
			0 to 200 °C	±0.6 °C
	50 °C	0.05 °C	-200 to less than -100 °C	±1.5 °C
			-100 to less than 0 °C	±0.8 °C
	100 °C	0.1 °C	0 to 400 °C	±0.6 °C
			-200 to less than -100 °C	±1.5 °C
			-100 to less than 0 °C	±0.8 °C
			0 to 400 °C	±0.6 °C

Note: The thermocouple accuracy is obtained by adding a reference junction compensation accuracy of ±0.5 °C



Dimensions, mass: Approx. 119.5W × 18.8H × 151.5D mm (4.70W × 0.74H × 5.96D in), Approx. 173 g (6.1 oz) Accessories: Conversion cable $\times 2$ (Connector: TAJIMI PRC03-12A10-7M10.5)

Strain Unit MR8903 (Accuracy at 23 ± 5 °C/73 ± 9 °F, 20 to 80 % rh after 30 minutes of warm-up time and auto-balance, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)

Functions	No. of channels: 4, for voltage/strain measurements (selectable for each channel, electronic auto-balancing, balance adjustment range within ±10000 μ V, ±10000 μ ε)
Input connectors	Unit side: "HDR-EC14LFDGTG2-SLE+" made by Honda Tsushin Kogyo Co., Ltd. Japan Via conversion cable, "PRC03-12A10-7M10.5" made by Tajimi Electronics Co., Ltd. Japan Max. rated voltage to earth: 33 V ACrms or 70 V DC (with input isolated from the main unit, the max. voltage that can be applied between input channel and chassis and between input channels without damage)
Suitable transducer	Strain gauge converter, Bridge resistance: 120 Ω to 1 k Ω , Bridge voltage: 2 V \pm 0.05 V, Gauge rate: 2.0
Input resistance	More than 1 M Ω
Voltage measurement ranges	50 μ V to 1000 μ V/div, 5 ranges, full scale: 20 division Accuracy: ±0.5 % f.s. + 4 μ V (at 50 μ V/div only), other ranges ±0.5 % f.s. (after auto-balance, with filter 5 Hz, zero position accuracy included)
Strain measurement ranges	20 μ ε to 1000 μ ε/div, 6 ranges, full scale: 20 division Accuracy: ±0.5 % f.s. + 4 μ ε (at 20, 50 μ ε/div), other ranges ±0.5 % f.s. (after auto-balance, with filter 5 Hz, zero position accuracy included)
Low-pass filter	Low-pass filter: 5/10/100 Hz, 1 kHz, OFF
Resolution	1/1250 of measurement range (using 16-bit A/D converter)
Highest sampling rate	200 kS/s (simultaneous sampling across 4 channels)
Frequency characteristics	DC to 20 kHz +1/-3 dB
Max. allowable input	10 V DC (the max. voltage that can be applied across input pins without damage)

Dimensions, mass: Approx. 119.5W × 18.8H × 151.5D mm (4.70W × 0.74H × 5.96D in), Approx. 185 g (6.5 oz) Accessories: None



CAN Unit MR8904

Input CAN port	Number of ports: 2, Connector: D-sub a male 9 pin $\times 2$
Standards	ISO 11898 CAN 2.0b, ISO 11898-1, ISO 11898-2, ISO 11898-3, SAE J2411
Interface	Selectable: High-speed CAN, Low-speed CAN, or Single-wire CAN by port (with built-in corresponding transceiver)
Transmit ACK	ON/OFF for transmitting a ACK for receiving CAN signal with the MR8904
Terminator	ON/OFF via commands, 120 Ω \pm 10 Ω built-in resistance
Baud rate	50 kbps to 1 Mbps at "High-speed", 10 kbps to 125 kbps at "Low-speed", 10 kbps to 83.3 kbps at "Single-wire"
Analyzed signal output channel	Up to 15 analog channels each equivalent to a 16-bit analog signal Up to 16 logic channels each equivalent to a 1-bit logic signal
Signal form	1-bit signal: 1 channel of Logic, or 1 channel of Analog 1-bit to 16-bits signal: 1 channel of Analog 17-bits to 32-bits signal: 2 channels of Analog * Cannot handle signals over 32-bits
ID trigger	Output "H" level pulse to designated logic channel when receiving set ID signal * Output pulse width: 50 μ s below 5 ms/div time axis, 1 sampling time at more than 10 ms/div time axis
Response time	Within 200 μ s after completely receiving CAN message
Transmit CAN message	Can transmit the setting CAN message to the CAN bus by a port

Options specifications (sold separately)

CAN Editor specifications (software bundled with the MR8904) (The following values are for one MR8904)	
Operating environment	Windows 7 / Vista (32-bit/64-bit), Windows XP (32-bit)
CAN definition settings	CAN message ID, Start position, Data length Data order: U/L (Motorola), L/U (Motorola), L/U (Intel) Code: Unsigned, 1-Signed, 2-Signed
CAN db file	<ul style="list-style-type: none"> • Load CAN db file • Convert to ".cdf" file • Register to list (editing not available), 33-bit data and above not supported • Convert data order: Motorola (CANdb file) to U/L (Motorola) • Convert coded file (CANdb file) to 2-Signed, IEEE float or double (CANdb file) not supported • Convert signal name (CANdb file) to the label • Convert comment (CANdb file) to the signal name
Registration list settings	CAN input port setting: Port 1, Port 2, Item number: 1 to 200 Setting upper / lower limit display on the MR8875 screen
CAN communication settings	<ul style="list-style-type: none"> • Interface: High-speed, Low-speed, Single-wire • Terminator: ON/OFF (ON is enabled at High-Speed only) • ACK: ON/OFF • Baud rate: AUTO (enabled at ACK OFF only) 50 kbps to 1 Mbps at "High-speed", 10 kbps to 125 kbps at "Low-speed", 10 kbps to 83.3 kbps at "Single-wire"
Analog channel settings	Number of channels: 15 <ul style="list-style-type: none"> • Assign the definition on the registration list under 16-bits to 1 channel • Assign the definition on the registration list for 17-bits to 32-bits to 2 channels
Logic channel settings	Number of channels: 16 <ul style="list-style-type: none"> • Assign the definition on the registration list under 16-bits, with bit position • Assign the definition on the registration list to the ID trigger
Transmission settings	Transmission number, Mode, CAN output port, Frame type, Transmission ID, Transmission byte length, Transmission data, Answer ID, Transmission period
Communication with the MR8875	Search MR8875 via USB, Registration list, CAN communication setting, Analog channels settings, Logic channel settings, Transmission setting information, etc.
Printing functions	Registration list, All items of CAN communication settings, Assigned analog list, Assigned logic list, All items of transmission settings
Save functions	CAN definition data: Binary form, ".cdf" extension, convertible to software for Hioki Model 8910 Setting date (All contents without CAN definition data): Binary form, ".ces" extension

Dimensions, mass: Approx. 119.5W × 18.8H × 151.5D mm (4.70W × 0.74H × 5.96D in), Approx. 185 g (6.5 oz) Accessories: None



Analog Unit MR8905 (Accuracy at 23±5°C/73±9°F, 20 to 80% rh after 30 min. of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Functions	No. of channels: 2, switchable between instantaneous value and AC RMS value
Input connectors	Banana connector (input impedance 4 MΩ, input capacitance less than 1 pF) Max. rated voltage to earth: CAT II 1000 V AC & DC, CAT III 600 V AC & DC (with input isolated from the main unit, the max. voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	500 mV to 50 V/div, 7 ranges, full scale: 20 div *The maximum displayable AC voltage is 700 Vrms when using 1/2 compression of the vertical axis.
Low-pass filter	5/50/500/5 kHz, OFF
Resolution	1/1250 of measurement range (using 16-bit A/D converter)
Highest sampling rate	500 kS/s (simultaneous sampling across 2 channels)
Accuracy	±0.5% f.s. (with 5 Hz filter ON)
RMS measurement	RMS accuracy: ±1.5% f.s. (30 Hz up to but not including 1 kHz, sine wave input) or ±3% f.s. (1 kHz up to 10 kHz, sine wave input) Response time: 300 ms (filter off, rising from 0% to 90% f.s.) or 600 ms (filter off, falling from 100% to 10% f.s.) Crest factor 2
Frequency characteristics	DC to 100 kHz -3 dB
Input coupling	DC/AC-RMS/GND
Max. allowable input	1000 V DC, 700 V AC (the max. voltage that can be applied across input pins without damage)

(Compatible with MR8875 firmware version 2.14/3.14 or later)

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 1 m (3.28 ft), approx. 320 g (11.3 oz)
Note: The unit-side plug of the MR9321-01 is different from the MR9321.

LOGIC PROBE MR9321-01	
Function	Detection of AC or DC relay drive signal for High/Low state recording Can also be used for power line interruption detection
Input	4 channels (isolated between unit and channels), HIGH/LOW range switching Input resistance: 100 kΩ or higher (HIGH range), 30 kΩ or higher (LOW range)
Output (H) detection	170 to 250 V AC, ±DC 70 to 250 V (HIGH range) 60 to 150 V AC, ±DC 20 to 150 V (LOW range)
Output (L) detection	0 to 30 V AC, ±DC 0 to 43 V (HIGH range) 0 to 10 V AC, ±DC 0 to 15 V (LOW range)
Response time	Rising edge 1 ms max., falling edge 3 ms max. (with HIGH range at 200 V DC, LOW range at 100 V DC)
Max. allowable input	250 Vrms (HIGH range), 150 Vrms (LOW range) (the maximum voltage that can be applied across input pins without damage)



Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 30 cm (0.98 ft), approx. 150 g (5.3 oz)
Note: The unit-side plug of the 9320-01 is different from the 9320.

LOGIC PROBE 9320-01	
Function	Detection of voltage signal or relay contact signal for High/Low state recording
Input	4 channels (common ground between unit and channels), digital/contact input, switchable (contact input can detect open-collector signals) Input resistance: 1 MΩ (with digital input, 0 to +5 V) 500 kΩ or more (with digital input, +5 to +50V) Pull-up resistance: 2 kΩ (contact input: internally pulled up to +5 V)
Digital input threshold	1.4V/ 2.5V/ 4.0V
Contact input detection resistance	1.4 V: 1.5 kΩ or higher (open) and 500 Ω or lower (short) 2.5 V: 3.5 kΩ or higher (open) and 1.5 kΩ or lower (short) 4.0 V: 25 kΩ or higher (open) and 8 kΩ or lower (short)
Response speed	500 ns or lower
Max. allowable input	0 to +50 V DC (the maximum voltage that can be applied across input pins without damage)



Cable length and mass: 70 cm (2.30 ft), Output side: 1.5 m (4.92 ft), 170g (6.0 oz)

DIFFERENTIAL PROBE P9000 (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement modes	P9000-01: For waveform monitor output, Frequency properties: DC to 100 kHz -3 dB P9000-02: Switches between waveform monitor output/AC effective value output Wave mode frequency properties: DC to 100 kHz -3 dB, RMS mode frequency properties: 30 Hz to 10 kHz, Response time: Rise 300 ms, Fall 600 ms
Division ratio	Switches between 1000:1, 100:1
DC output accuracy	±0.5 % f.s. (f.s. = 1.0 V, division ratio 1000:1), (f.s. = 3.5 V, division ratio 100:1)
Effective value measurement accuracy	±1 % f.s. (30 Hz to less than 1 kHz, sine wave), ±3 % f.s. (1 kHz to 10 kHz, sine wave)
Input resistance/capacity	H-L: 10.5 MΩ, 5 pF or less (at 100 kHz)
Maximum input voltage	1000 V AC, DC
Maximum rated voltage to ground	1000 V AC, DC (CAT III)
Operating temperature range	-40°C to 80°C (-40°F to 176°F)
Power supply	(1) AC adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter), 0.9 VA (main unit only) (2) USB bus power (5 V DC, USB-microB terminal), 0.8 VA (3) External power source 2.7 V to 15 V DC, 1 VA
Accessories	Instruction manual ×1, Alligator clip ×2, Carrying case ×1




Capture Voltage Signals from Outside the Wire Cover: SP3000-01

Measure signals from electric equipment on vehicles, capture LIN and other communications signals.

- Measure insulated wires with outside diameters 1 mm to 2.5 mm
- 10 Hz to 100 kHz band width

Analyzing data on a computer

- **WAVE PROCESSOR 9335 (option)**
 - Waveform display and calculation
 - Print function
- **Wave Viewer (Wv) Software (bundled software)**
 - Confirmation of binary data waveforms on a computer
 - Saving data in the CSV format for transfer to spreadsheet software



9335 Outline specifications (option)

Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP
Functions	<ul style="list-style-type: none"> • Display: Waveform display, X-Y display, cursor function, etc. • File loading: Readable data formats (.MEM, .REC, .RMS, .POW) Largest readable file: Largest file that can be saved by supported instruments (Supported file size may be limited due to computer's operating environment.) • Data conversion: Conversion to CSV format, batch conversion of multiple files
Print	<ul style="list-style-type: none"> • Print function: Saving of print image files (with support for enhanced metafile [EMF] format) • Print format: Select from no tiling, 2 to 16 tiles, 2 to 16 rows, X/Y 1 to 4 tiles, preview/hard copy

Wave Viewer (Wv) Outline specifications (bundled software)

Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP
Functions	<ul style="list-style-type: none"> • Simple display of waveform file • Convert binary data file to text format, CSV • Scroll display, enlarge/reduce, jump to cursor/trigger position, etc.

MR8875 Options in Detail

Input modules

*Install by inserting into the main unit. Can be replaced by user. Input cables are not supplied.

ANALOG UNIT MR8901
4ch, Voltage measurement, DC to 100kHz bandwidth

VOLTAGE/TEMP UNIT MR8902
15ch, Voltage measurement, Thermocouple measurement

STRAIN UNIT MR8903
4ch, Voltage measurement, Strain gauge converter input, Conversion cable included

CAN UNIT MR8904
Up to 15 analog channels each equivalent to a 16-bit analog signal, and up to 16 logic channels each equivalent to a 1-bit logic signal

ANALOG UNIT MR8905
2 channels, high-voltage DC/RMS input, DC to 100 kHz band
(Compatible with MR8875 firmware version 2.14/3.14 or later)

Input cable (A)

*Voltage is limited to the specifications of the input modules in use

ALLIGATOR CLIP L9790-01
Red/black set attaches to the ends of the cables L9790

CONTACT PIN 9790-03
Red/black set attaches to the ends of the cables L9790

GRABBER CLIP 9790-02
Red/black set attaches to the ends of the cables L9790

CONNECTION CORD L9790
Flexible ϕ 4.1 mm (0.16 in) thin dia., cable allowing for up to 600 V input. 1.8 m (5.91 ft) length
* The end clip is sold separately.

Other options for Input

CONNECTION CORD L9790-01
9790-03
9790-02

Input cable (B)

*Voltage is limited to the specifications of the input modules in use

CONNECTION CORD L9198
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 300 V input. 1.7 m (5.58 ft) length, small alligator clip

Input cable (C)

* Voltage input via banana terminals limited by the voltage specifications of the respective input unit.

CONNECTION CABLE SET L4940
Banana plug - banana plug, 1.5 m (4.92 ft) length, red/black each 1

EXTENSION CABLE L4931
Expands the length of the cable with banana plug, 1.5 m (4.92 ft) length

ALLIGATOR CLIP L4935
Attaches to the tip of the banana plug cable, CAT IV 600V, CAT III 1000V

BUS BAR CLIP L4936
Attaches to the tip of the banana plug cable, CAT III 600V

MAGNETIC ADAPTER L4937
Attaches to the tip of the banana plug cable, CAT III 1000V

GRABBER CLIP 9243
Attaches to the tip of the connection cable, 196 mm (7.72 in) length, CAT III 1000 V

Input cable (D)

*Voltage to ground is within this product's specifications. Separate power source is also required.

DIFFERENTIAL PROBE P9000-01
Waveform only, up to 1 kV AC/DC, band width up to 100kHz

DIFFERENTIAL PROBE P9000-02
Waveform/RMS value switchable, up to 1 kV AC/DC, band width up to 100kHz

AC ADAPTER Z1008
100 to 240 V AC

Custom cable

*For P9000. Inquire with your Hioki distributor.

(1) Bus powered USB cable
(2) USB(A)- Micro B cable
(3) 3-prong cable

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length

CONVERSION ADAPTER 9199
Receiving side banana, output BNC terminal

CAN CABLE 9713-01
For the MR8904(MR8875), 8910, Unprocessed on one end, 1.8 m (5.91 ft) length

Thermocouple

*For reference only. Please purchase locally.



Model : MEMORY HiCORDER MR8875

Model No.(Order Code) (Note)
MR8875 (Max. 16 - 60ch, 32MW memory, main unit only)
*Cannot operate alone, You must install other options

* Only the small terminal types can be used. * The 9323 is not required for the small-terminal types 9327, 9320-01, 9321-01 and MR9321-01.

Logic signal measurement

LOGIC PROBE 9320-01
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)

LOGIC PROBE MR9321-01
4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)

CONVERSION CABLE 9323
*Used for connecting the 9320/9321/MR9321 and the 9324 to the Memory HiCorder with small logic terminal models

Storage media

SD MEMORY CARD 2GB Z4001
2GB capacity

SD MEMORY CARD Z4003
8 GB capacity

***SD Card Precaution**
Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.

PC Software

WAVE PROCESSOR 9335
Convert data, print and display waveforms

LAN CABLE 9642
Straight Ethernet cable, supplied with straight to cross conversion cable, 5 m (16.41 ft) length

Input cable (E)

*Voltage to ground is within this product's specifications. Separate power source is also required.

DIFFERENTIAL PROBE 9322
For up to 1kV AC or 2kV DC, frequency band width up to 10MHz

AC ADAPTER 9418-15
100 to 240 V AC.

Power supply

AC ADAPTER Z1002
For main unit, 100 to 240 V AC

BATTERY PACK Z1003
NiMH, Charges while installed in the main unit

Case

CARRYING CASE C1004
Includes compartment for options, hard trunk type, also suitable for transporting the MR8875

*A separate power supply (CT955x) is required in order to use a high-precision current sensor.
*Only sensors with ME15W (12-pin) terminals (-05 type) can be connected to the CT955x.
*The separately available Conversion Cable CT9900 is required in order to use a sensor with PL23 (10-pin) terminal.

POWER SUPPLY for Current Sensors

SENSOR UNIT CT9555 1ch, with Waveform output
CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length

PL23 (10-pin) - ME15W (12-pin) conversion

CONVERSION CABLE CT9900
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

Up to 1000 A (High precision) *ME15W (12-pin) terminal type

High-precision pull-through type, monitor the waveforms of DC to distorted AC current
AC/DC CURRENT SENSOR 9709-05, 100 kHz band width, 500A
Monitor the waveforms of DC to distorted AC current
AC/DC CURRENT PROBE CT6844-05, 200 kHz band width, 500A
AC/DC CURRENT PROBE CT6845-05, 100 kHz band width, 500A
AC/DC CURRENT PROBE CT6846-05, 20 kHz band width, 1000A

Precautions when connecting a high-precision current sensor to a Memory HiCorder
Connecting to the MR8880/MR8875/MR8870
• High-precision current sensor (ME15W) + CT9555 + BNC cable → MR8875
• High-precision current sensor (PL23) + CT9900 + CT9555 + BNC cable → MR8875

Other current sensor types
The MR8875 can be used with various types of current sensors and probes. For details, see product information on Hioki's website.

The CT7290 (available separately) is required in order to use these current sensors

100 A to 2000 A (Medium speed)

AC/DC CURRENT SENSOR CT7631, (Auto zero CT7731)
DC, 1 Hz to 10 kHz (-3dB), 100 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7636, (Auto zero CT7736)
DC, 1 Hz to 10 kHz (-3dB), 600 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7642, (Auto zero CT7742)
DC, 1 Hz to 10 kHz (5 kHz), 2000 A, 1 mV/A output

DISPLAY UNIT CM7290
Provides measurement, display, and output functionality when used with the CT7000s.

DISPLAY UNIT CM7291
with built-in Bluetooth® wireless technology

OUTPUT CORD L9095
Connect to BNC terminal, 1.5 m (4.92 ft) length

500 A to 5000 A *For commercial power lines, 50/60 Hz

CLAMP ON PROBE 9018-50
Good phase characteristics, Frequency characteristics: 40 Hz to 3 kHz, 10 to 500 A AC range, output 0.2 V AC f.s.

CLAMP ON PROBE 9132-50
Frequency characteristics: 40 Hz to 1 kHz, 20 to 1000 A AC range, output 0.2 V AC f.s.

AC FLEXIBLE CURRENT SENSOR CT9667-01/-02/-03
10 Hz to 20 kHz, 5000 A / 500 A AC, 500 mV/f.s. output, ϕ 100 to 254 mm (3.94 to 10.00 in), 3 loop diameters

Leak Current *For commercial power lines, 50/60 Hz

CLAMP ON LEAK HITESTER 3283
10 mA range/10 μ A resolution to 200 A range, with monitor/analog output 1 V f.s.

OUTPUT CORD L9095
Connect to BNC terminal, 1.5 m (4.92 ft) length

AC ADAPTER 9445-02
For USA, 100 to 240 V AC, 9 V / 1 A

AC ADAPTER 9445-03
For EU 100 to 240 V AC, 9 V / 1 A

Non-contact voltage measuring

NON-CONTACT AC VOLTAGE PROBE SP3000-01
5 Vrms rated, 10 Hz to 100 kHz band width


NON-CONTACT AC VOLTAGE PROBE SP3000
Sold individually

AC VOLTAGE PROBE SP9001
Sold individually

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

MEMORY HiCORDER MR8827

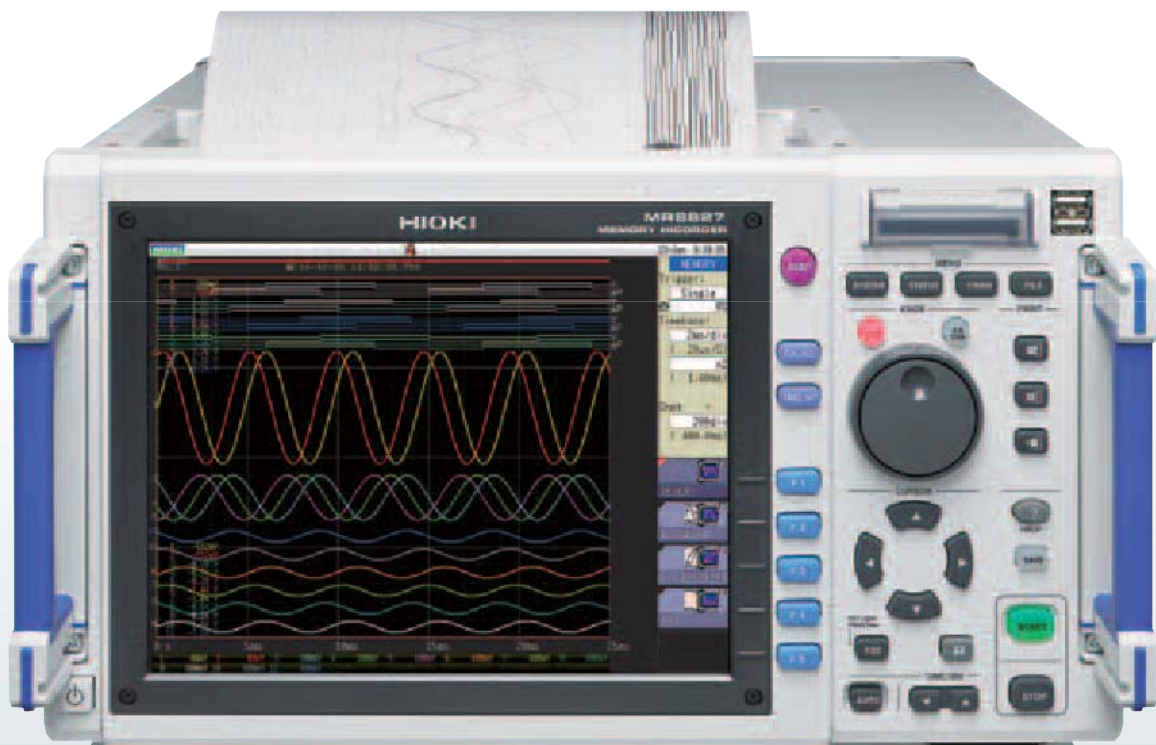

64 ch
High-speed
Isolated testing

32 analog channels + 32 logic channels

The Memory HiCorder MR8827 achieves isolated input between the main unit and channel or between channels, at a maximum sampling speed of 20 MS/s on all channels.

It provides mixed recording that combines 32 analog channels and 32 logic channels, and logic input can be expanded up to 64 channels.

Welcome to the next generation of Hioki Memory HiCorders that deliver multi-channel waveform recording of a diverse array of signals to meet complex and demanding applications.

CE

*When using 64 logic channels, 28 analog channels are available.

asita
 TECNOLOGIE DI MISURA

MR8827 - Evolving to the Next Stage of High-Speed Waveform Recording


The high-performance 8826 delivered the most analog channels out of all portable-type Memory HiCorders. The new MEMORY HiCORDER MR8827 inherits that concept and evolves even further.

20x Sampling Speed



A/D converter integrated in the input amp

1MS/s ▶ 20MS/s



The sampling speed (for all channels simultaneously) increased by 20 times, while maintaining isolated input.

2x Logic Input Channels



Logic Unit 8973

32ch ▶ 64ch

A maximum of 8 logic probes can be inserted in the main unit. Use of 2 Logic Unit 8973 will add 8 more connections, supporting 64 channel logic signal input. (This reduces the number of available analog channels to 28.)

8x Internal Memory Capacity



64MW ▶ 512MW

With 8 times more internal memory capacity from 64 MW to 512 MW, you can now record signals of fast events easily and for extended periods of time.


Storage Devices and Media



USB Memory/CF Card
SSD (Solid State Drive)

Use various storage devices and media with more capacity and faster writing speeds than conventional drives or PC cards. The optional internal SSD has 128 GB of capacity so you can store large amounts of data.


3x PC Transfer Speed



Data transfer time →

Transferring speed of stored data from internal memory or SSD to the PC has greatly increased.


LCD Resolution



10.4 inch TFT 10.4 inch SVGA
640×480 ▶ 800×600

Overlapping waveforms are easier to identify now with a new high resolution LCD.

2x Paper Feeding Speed



25mm/sec ▶ 50mm/sec

Use of a high-speed thermal printer gives you 2 times the printing speed.

Easy Setup of Recording Paper



No more hassles of feeding recording paper between the rubber roller and the thermal head. Just drop it in to set it up.



A4 Size Printer



Print in fine detail, with 2 times the paper feeding speed. Get a printout of enlarged waveforms on A4 size paper so you can check them easily on-site.

Scalable Input Channels



A maximum of 16 modules can be connected on the rear side. The main unit also has connectors for connecting 8 logic probes.


Isolated Input for Security




Isolation element

The MR8827 differentiates itself from typical oscilloscopes by providing complete isolation for the input of each channel, and between each channel and the main frame, enabling you to handle electrical potential differences among multiple signals without any concern.

High Resolution LCD

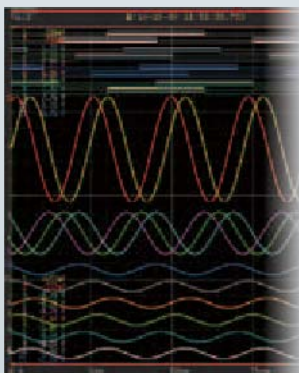

Conventional devices used a 640x480 dot TFT LCD, but the next-generation MR8827 uses an 800x600 dot SVGA high resolution LCD to make it even easier to identify overlapping measured waveforms.

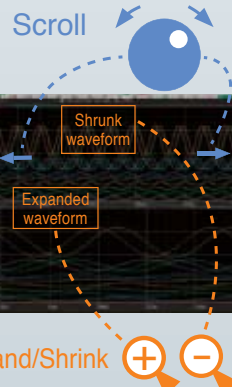

Scroll

Scroll through the waveform to check all or just part of it.


Expand / shrink

Not only can you expand or shrink the time axis or vertical axis, you can also split the screen to check the expanded waveform of the shrunk waveform.



Scanning

Scan data at the cursor and the waveform's cross point.



Cutout

Specify the segment to save as binary or CSV data.

Sampling Speed and Recording Time

Memory functions			Recorder functions	
Time axis range/div	Sampling-speed	Maximum recording length	Time axis range/div	Maximum recording length
		32 channels		
		160,000 div	10 ms	13 min 20 s
5 μs	50 ns	0.8 s	20 ms	26 min 40 s
10 μs	100 ns	1.6 s	50 ms	1 h 6 min 40 s
20 μs	200 ns	3.2 s	100 ms	2 h 13 min 20 s
50 μs	500 ns	8 s	200 ms	4 h 26 min 40 s
100 μs	1 μs	16 s	500 ms	11 h 6 min 40 s
200 μs	2 μs	32 s	1 s	22 h 13 min 20 s
500 μs	5 μs	1 min 20 s	2 s	1 d 20 h 26 min 40 s
1 ms	10 μs	2 min 40 s	5 s	4 d 15 h 6 min 40 s
2 ms	20 μs	5 min 20 s	10 s	9 d 6 h 13 min 20 s
5 ms	50 μs	13 min 20 s	30 s	27 d 18 h 40 min 0 s
10 ms	100 μs	26 min 40 s	50 s	46 d 7 h 6 min 40 s
20 ms	200 μs	53 min 20 s	1 min	55 d 13 h 20 min 0 s
50 ms	500 μs	2 h 13 min 20 s	100 s	92 d 14 h 13 min 20 s
100 ms	1 ms	4 h 26 min 40 s	2 min	111 d 2 h 40 min 0 s
200 ms	2 ms	8 h 53 min 20 s	5 min	277 d 18 h 40 min 0 s
500 ms	5 ms	22 h 13 min 20 s	10 min	- abbreviated -
1 s	10 ms	1 d 20 h 26 min 40 s	30 min	- abbreviated -
2 s	20 ms	3 d 16 h 53 min 20 s	1 h	- abbreviated -
5 s	50 ms	9 d 6 h 13 min 20 s		
10 s	100 ms	18 d 12 h 26 min 40 s		
30 s	300 ms	55 d 13 h 20 min 0 s		
50 s	500 ms	92 d 14 h 13 min 20 s		
1 min	600 ms	111 d 2 h 40 min 0 s		
100 s	1 s	185 d 4 h 26 min 40 s		
2 min	1.2 s	222 d 5 h 20 min 0 s		
5 min	3 s	- abbreviated -		

Sampling period:
1 μs, 10 μs, 1 ms, 10 ms, 100 ms

*Select within 1/100 of the time axis. Also limited by combination with the time axis setting for memory recording.

Signal Input and Output

The right module for your measurement needs

Inverter / UPS Test

- Operation testing and evaluation during load fluctuation
- Confirmation of UPS switching

Recommended units

ANALOG UNIT 8966
LOGIC UNIT 8973
CURRENT UNIT 8971

Perfect for inverter and UPS evaluation / start-up tests. Record using both logic (control signals) and analog (primary/secondary voltage or current for a UPS or inverter).



UPS



Inverter


Power Monitor and Logger

- Identify power fluctuations when power supply is turned ON/OFF and during load fluctuations
- Long-term fluctuations in power

Recommended units

ANALOG UNIT 8966
HIGH RESOLUTION UNIT 8968
FREQ UNIT 8970

Load the analog output for the rms (instant power / voltage / current, etc.) calculated by the power analyzer, or import the waveform output from the power analyzer to observe data for long-term tests or irregular waveforms.

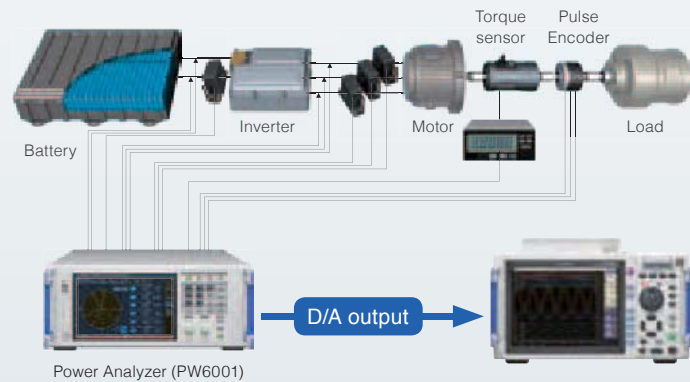

Power Analyzer (PW6001)

Control Simulation

- Generate simulated output of each type of sensor signal
- Fluctuating simulated output for 12 V DC car batteries

Recommended units

ARBITRARY WAVEFORM GENERATOR UNIT U8793
WAVEFORM GENERATOR UNIT MR8490
PULSE GENERATOR UNIT MR8791

Use actual waveforms to perform testing on control boards, such as for engine control, airbags, brake systems, power steering, and active suspension. This allows efficient simulation of actual waveforms obtained from cars.



Perfect for control testing of automobiles, high speed trains, and traditional trains

13 units to choose from

Generation	Voltage	DC voltage	Generation	Pulse	Voltage
ARBITRARY WAVEFORM GENERATOR UNIT U8793	HIGH VOLTAGE UNIT U8974	DIGITAL VOLTMETER UNIT MR8990	WAVEFORM GENERATOR UNIT MR8790	PULSE GENERATOR UNIT MR8791	ANALOG UNIT 8966
No. of channels: 2 Arbitrary waveform output	Measurement resolution: 16-bit 1/1600 of measurement range	Measurement resolution: 24-bit 1/50 000 of measurement range	No. of channels: 4 Waveform output	No. of channels: 8 Pulse output	Measurement resolution: 12-bit 20 MS/s high-speed sampling
• Output frequency range 10m Hz to 100 kHz • Max. output: 15 V	• High voltage • Commercial power supply (primary/secondary) • Power equipment characteristics testing	• Multi-channel • Minute sensor voltage • EV battery voltage	• DC output: -10 V to 10 V • Sine wave output 10 mHz to 20 kHz	• Pulse output 0.1 Hz to 20 kHz • Pattern output	• Various amps • Transducers • Sensors • Industrial meters

Abundant modules

Hioki has added new high-performance modules in response to overwhelming demand.


The Memory HiCorder now supports a wide variety of measurements.



Output and record results seamlessly


Just one MEMORY HICORDER gives you a function generator mode, arbitrary waveform generator mode, and waveform measurement mode.

This makes it easy to observe waveforms while varying test conditions, such as changing the signal's amplitude and frequency and programming various waveforms to output in order.

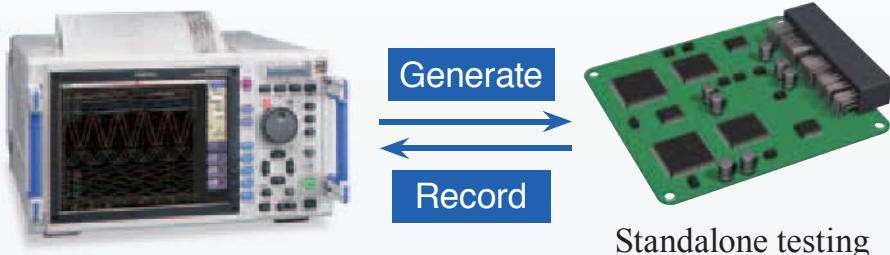


Output recorded waveforms without modification

For example, you could output actual waveforms recorded from a car without modification, and then use them for standalone testing. You can also generate isolated output of up to 15 V without a generator or amplifier, which is traditionally necessary in order to generate output while varying the signal's amplitude and frequency.

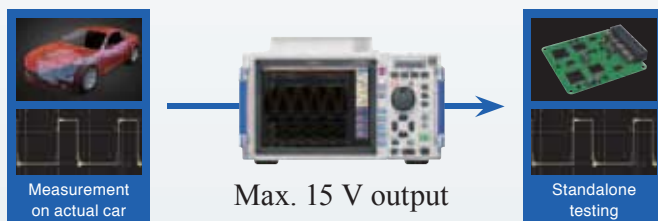


Process actual waveforms for reproducibility testing

Process and calculate signals recorded with the MEMORY HICORDER and output the arbitrary waveforms that you create.

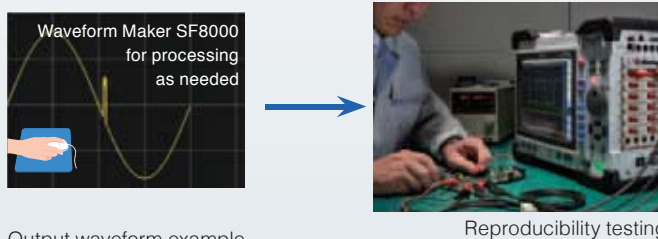


Waveform Maker Software included

After you install the included SF8000 Waveform Maker software on your computer, you can create waveforms easily by either entering them directly or by entering the functions behind them. You can also quickly add noise and multiply waveforms.

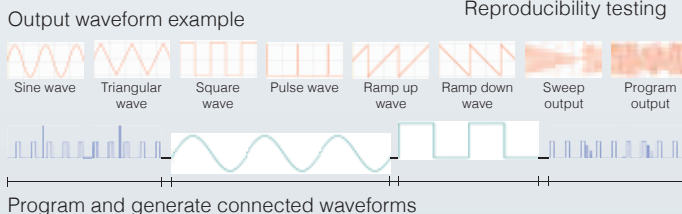

1000 V DC, 700 V AC high-voltage direct input

Since you can directly input up to 1000 V DC and 700 V AC, a differential probe is no longer necessary. Maximum rated voltage to ground is 1000 V for CAT III and 600 V for CAT IV environments.

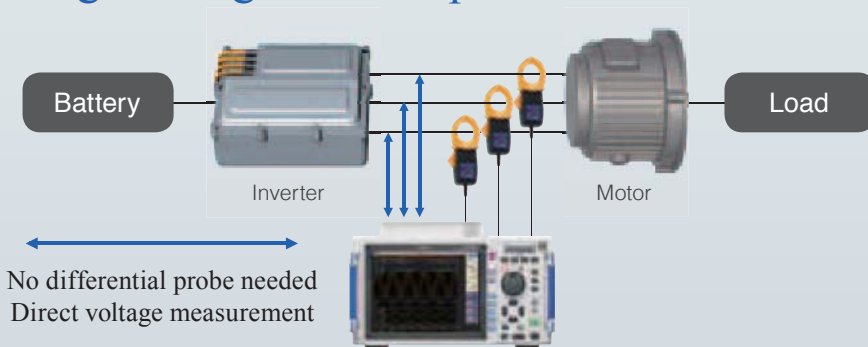


Temperature	Voltage	Distortion	Frequency, RPM	Current	Voltage	Contact
TEMP UNIT 8967	HIGH RESOLUTION UNIT 8968	STRAIN UNIT U8969	FREQ UNIT 8970	CURRENT UNIT 8971	DC/RMS UNIT 8972	LOGIC UNIT 8973
Measurement resolution: 16-bit 1/1000 of measurement range	Measurement resolution: 16-bit 1/1600 of measurement range	Measurement resolution: 16-bit 1/1250 of measurement range	Measurement resolution: 16-bit 1/2000 of measurement range	Measurement resolution: 12-bit Clamp sensor direct connection	Measurement resolution: 12-bit RMS measurement	No. of channels: 16 Observation of control signal
• Thermocouple K, J, E, T, N, R, S, B, W	• Supply voltage • Primary / secondary inverter voltage • Motor voltage, etc.	• Strain gauge converter • Dynamic strain * Vibration • Pressure * Acceleration • Weight, etc.	• Encoder • Rotating pulse	• Supply current • Inverter current • Motor current, etc.	• Supply voltage • Primary / secondary inverter voltage • Motor voltage, etc.	• Voltage / non-voltage contacts • Relay signals • AC / DC signals

Data Storage

Save on devices and media

Input signals after A/D conversion stored in internal memory can be saved on the optional internal SSD, USB memory, or CF card.

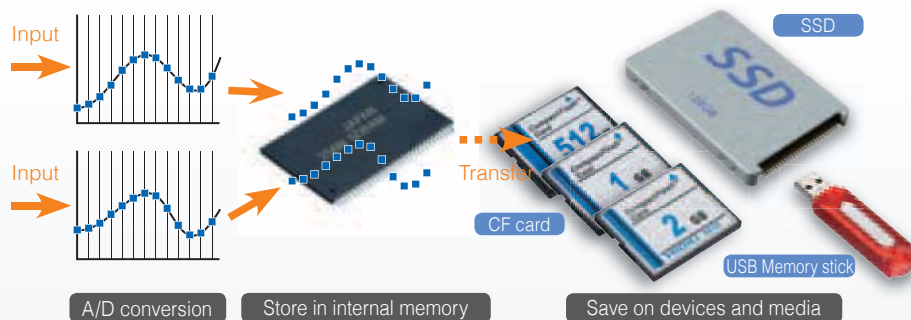


Transfer to PC

Check and analyze data saved in the internal SSD, USB memory, or CF card, by transferring it to a PC, via LAN or USB.


LAN Connection

Use the HTTP function to operate MR8827 with a browser on a PC connected via LAN. You can also use the FTP function to retrieve data from internal memory, devices or media connected to the main unit.

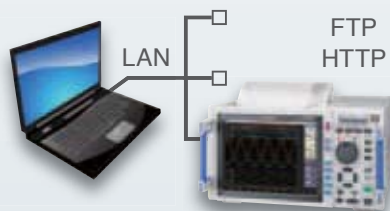

USB Connection

Use a PC to retrieve data saved on devices and media such as internal memory, SSD, or CF card connected to the main unit, via USB.

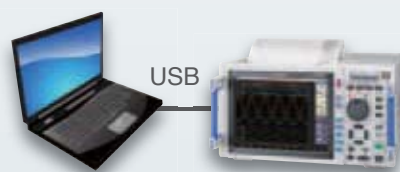


Analysis software

WAVE PROCESSOR 9335

(Software sold separately)

- Waveform display, calculations
- Print function




9335 Brief Specifications

Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP
Functions	- Display functions: Waveform display, X-Y display, Cursor function, etc. - File loading: Readable data formats (.MEM, .REC, .RMS, .POW) / Maximum loadable file size: Maximum file size that can be saved by a given device (file size may be limited depending on the computer configuration) - Data conversion: Conversion to CSV format, Batch conversion of multiple files, etc.
Printing	- Print function: Printing image file output (expanded META type, *.EMF*) - Print formatting: 1 up, 2-to-16 up, 2-to-16 rows, X-Y 1-to-4 up, preview, hard copy

LAN COMMUNICATOR 9333


(Software sold separately)

- Auto-save waveform data to PC
- Remote control via LAN connection
- Save in CSV format and transfer to spreadsheet programs



9333 Brief Specifications

Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP, (9333 ver.1.09 or later)
Functions	- Auto-saves waveform data to PC, Remote control of Memory HiCorder (by sending key codes and receiving images on screen), print report, print images from the screen, receive waveform data in same format as waveform files from the Memory HiCorder (binary only) - Waveform data acquisition: Accept auto-saves from the Memory HiCorder, same format as auto-save files of Memory HiCorder (binary only), print automatically with a Memory HiCorder from a PC. The Memory HiCorder's print key launches printouts on the PC - Waveform viewer: Simple display of waveform files, conversion to CSV format, etc.

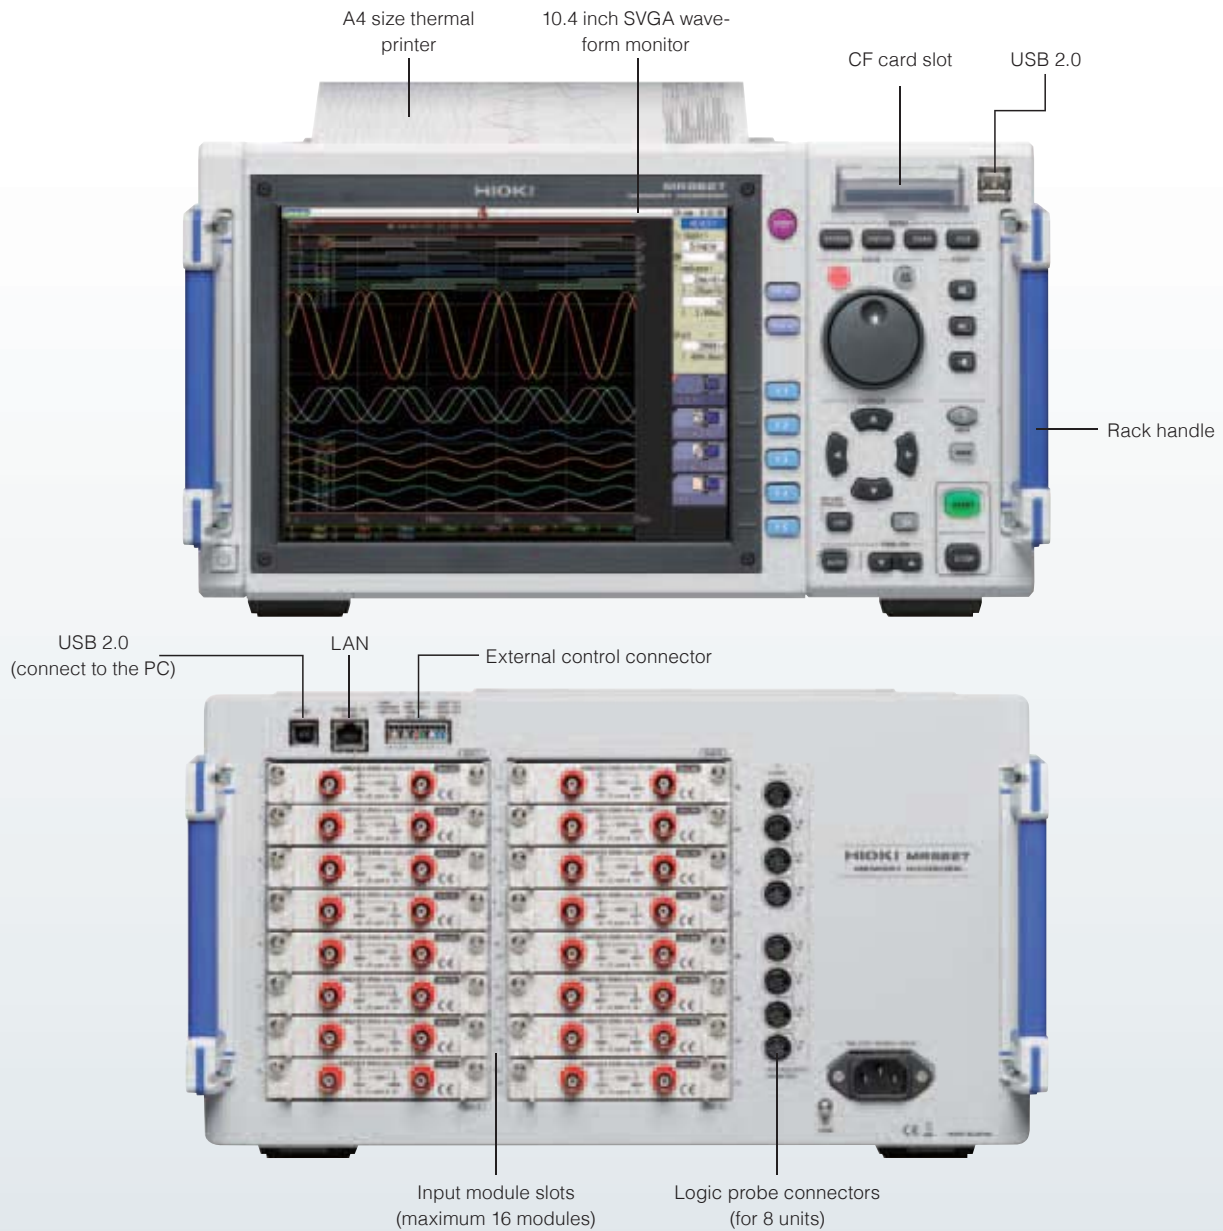

iPad App for Memory HiCorder HMR Terminal

Free app (exclusively for iPad) downloadable from the App Store

- Freely control waveforms using iPad's gesture controls
- Fingertip operation of Max. 32 channels of waveform data
- Operate the Memory HiCorder via network
You can change settings, and monitor waveforms during measurement.
*New function on Ver 2.0



■ Data can view by the iPad using HioKI's dedicated apps available from the App Store. Search for "HIOKI" and download the "HMR Terminal" app.



*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.
*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.
*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.
*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.


■ HMR Terminal Brief specifications (free software)

Operating environment	iOS on the iPad (Apple Inc.)
Functions	- Data acquisition: Send to iPad via FTP using a WiFi router, or load to iPad via iTunes (PC app) - Intuitively operate waveform level searches, maximum / minimum / average values, zero position adjustment, and more at your fingertips - Waveform monitoring - Meter setting * Logic waveforms and computational waveforms are not supported.

Wave Viewer Wv

(Bundled software)

- Check waveforms with binary data on a PC
- Save data in CSV format and transfer to spreadsheet programs



■ Wave Viewer (Wv) Brief Specifications

Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP
Functions	- Simple display of waveform files - Convert binary data files to text format, CSV, etc. - Scroll function, enlarge/reduce display, jump to cursor/trigger position, etc.

Application



Perfect for recording a combination of analog and logic signals that require multiple channels.

Electric power

Power electronics


Transformer Interruption Tests

Interchannel isolation allows for safe circuit connections. Simultaneous high-speed sampling can record waveforms before and after the interruption, and allows you to input many control and circuit signals.



Battery Charge/Discharge Tests

Input and test the voltage of each battery cell. The MR8827 is built for up to 400 V DC input, protecting it even if high voltage is applied when there is a short-circuit.

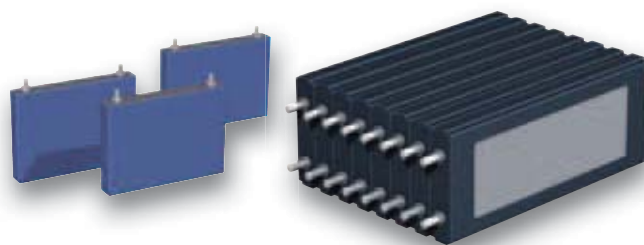


Inverter / UPS Test

Perfect for inverter and UPS evaluation and start-up tests. Record using both logic (control signals) and analog input (primary/secondary voltage or current for a UPS or inverter).



Power Monitor and Logger

By loading the analog output for the effective value (instant power / voltage / current, etc.) calculated by the power analyzer, or by importing the waveform output from the power analyzer to MR8827, you can observe data for long-term tests or irregular waveforms.

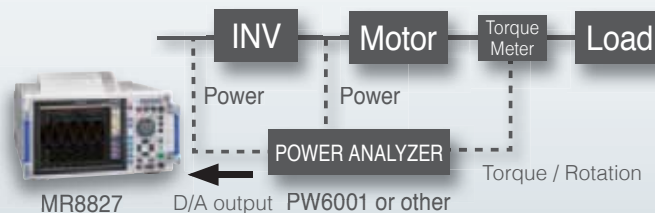

Record a diverse array of signals simultaneously


Mechatronics

Automotive




ECU Evaluation

The 32 analog channels and 32 logic channels work great for observing input and output signals of an Engine Control Unit. Over 4 hours of recording can be achieved with 1 ms sampling.

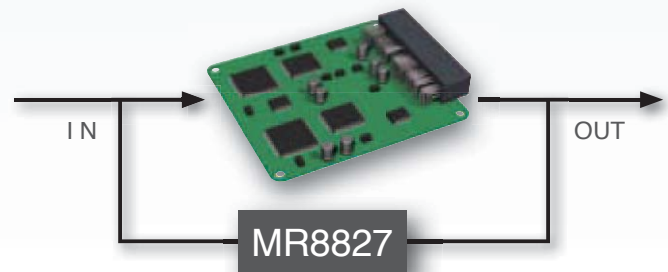


Engine Strain Measurements

Use the Strain Unit U8969 to perform strain measurements of up to 32 channels. You can use the numerical value calculation function to automatically calculate the maximum value, minimum value, and P-P value of strain waveforms.




Vibration / Endurance Tests

Use the long 512MW memory to observe vibration waveforms easily (Memory function). Also, with the recorder function, you can perform long-term observation by capturing the waveform peaks while sampling at high speeds.



Injection Molder Evaluation

Along with a pneumatic pressure or valve closure, you can record the logic input from control signals. Select from a rich lineup of Hioki input units that support a wide range of sensors and converters.

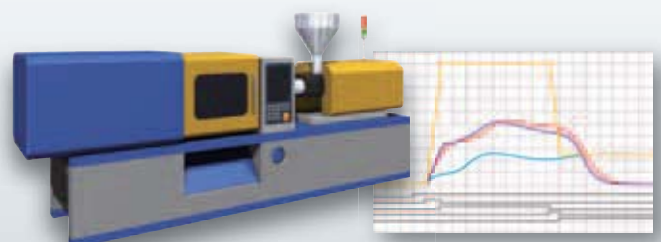

Main unit Specifications


Basic specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	MEMORY (high-speed recording) RECORDER (real-time recording) X-Y RECORDER (X-Y real-time recording) FFT (frequency analysis)
Main unit OS	μITRON (Non-Windows OS)
Number of channels (Max.)	[16 analog input modules]: 32 analog channels + 32 logic channels (logic probe terminals standard, logic has common GND) [14 analog input modules + 2 logic input modules]: 28 analog channels + 64 logic channels (standard 32 channels + 32 channels in Logic unit 8973 ×2) * Max. up to two modules of the Logic Unit 8973, the Current Unit 8971 up to four modules
Maximum sampling rate	20 MS/second (all channels simultaneously)
Internal memory	16MW/ch (total capacity 512MW memory), 16MW/ch (using 32 analog channels), 32MW/ch (using 16 analog channels), 64MW/ch (using 8 analog channels), 128MW/ch (using 4 analog channels)
Data storage media	CF card slot (standard) ×1 (up to 2GB, FAT, or FAT-32 format), USB port ×2 (USB 2.0)
Backup battery life	Clock and parameter setting backup: at least 10 years (reference value at 25°C)
External control connectors	External trigger input, Trigger output, External sampling input, GND, Two external outputs (GO/NG output), Three external inputs (start/IN1, stop/IN2, save/IN3)
External interfaces	LAN: 100BASE-TX (DHCP, DNS supported, FTP server, HTTP server) USB: USB 2.0 compliant, series A receptacle ×1, series B receptacle ×1, (File transfer SSD/ CF card to PC, or remote control from PC)
Environmental conditions (No condensation)	Operation: 0°C to 40°C (32°F to 104°F), 20% to 80% rh Storage: -10°C to 50°C (14°F to 122°F), 90% rh or less
Standards	Safety: EN61010 EMC: EN61326, EN61000-3-2, EN61000-3-3
Power supply	AC 100 to 240 V, 50/60 Hz
Power consumption	220 VA max. (when not using the printer), 350 VA max. (when using the printer)
Dimensions and mass	401 mm (15.79 in)W × 233 mm (9.17 in)H × 388 mm (15.28 in)D, 12.6 kg (444.4 oz) (main unit only)
Supplied accessories	Instruction manual ×1, Application disk (Wave Viewer Wv, Communication commands table) ×1, Power cord ×1, Input cord label ×1, USB cable ×1, Printer paper ×1 (when equipped with a printer unit), Roll paper attachment ×2 (when equipped with a printer unit)

PRINTER UNIT U8350 (Factory-installed option)	
Features	Printer paper one-touch loading, high-speed thermal printing
Recording paper	216 mm (8.50 in) × 30 m (98.43 ft), thermal paper roll (use the 9231 paper) Recording width: 200 mm (7.87 in) 20 division full scale, 1 div = 10 mm (0.39 in) 80 dots
Recording speed	Max. 50 mm (1.97 in)/sec
Paper feed density	10 lines/mm
Display	
Display	10.4 inch SVGA-TFT color LCD (800 × 600 dots) (Time axis 25 div × Voltage axis 20 div, X-Y 20 div × 20 div)
Languages	English, Japanese, Korean, Chinese
Waveform display zoom/compression	Time axis: ×10 to ×2 (zoom at MEMORY function only), ×1, ×1/2 to ×1/20000, Voltage axis: ×100 to ×2, ×1, ×1/2 to ×1/10
Variable display	Upper/Lower limit set, display/div set
Scaling	10:1 to 1000:1, automatic scaling for various probes Manual scaling (conversion ratio setting, 2-point setting, unit setting)
Comment input	Alphanumeric input (title, analog and logic channels) Simple input, history input, phrase input
Logic waveform	Display point move 1 % step, Line width 3 types
Display partition	Max. eight divisions
Monitor function	• Input level monitor • Numerical value (Sampling 10kS/s fixed, refresh rate 0.5s)
Other display functions	• Waveform inversion (positive/negative) • Cursor measurement (A, B, 2-cursor, for all channels) • Vernier function (amplitude fine adjustment) • Zoom function (horizontal screen division, zoomed waveform shown in lower section) • 16 selectable colors for waveform display • Zero position shift in 1% steps for analog waveform • Global zero adjust for all channels and all ranges

MEMORY (high-speed recording)	
Time axis	5 μs to 5 min/div (100 samples/div) 26 ranges, External sampling (100 samples/div, or free setting), Time axis zoom: ×2 to ×10 in 3 stages, compression: 1/2 to 1/20000 in 13 stages
Sampling period	1/100 of time axis range (minimum 50 ns period)
Recording length	Built-in presets: (at 4, 8, 16ch mode) 25 to 20000 div, (at 4, 8 ch mode) 25 to 500000 div (at 4 ch mode) 25 to 1000000 div Arbitrary presets: setting in 1 div steps, Max. 1280000 div (at 4ch mode), 640000 div (at 8ch mode), 320000 div (at 16ch mode), 160000 div (at 32ch mode)
Pre-trigger	Record data from before the trigger point at 0 to +100% or -95% of the recording length in 15 stages, or in 1 div step settings
Numerical calculation	• Simultaneous calculation for up to 16 selected channels Average value, effective (rms) value, peak to peak value, maximum value, time to maximum value, minimum value, time to minimum value, period, frequency, rise time, fall time, standard deviation, area value, X-Y area value, specified level time, specified time level, pulse width, duty ratio, pulse count, four arithmetic operations, time difference, phase difference, high-level and low-level • Calculation result evaluation output: GO/NG (with open-collector 5 V output) • Automatic storing of calculation results
Waveform processing	• For up to 16 freely selectable channels, the following functions can be performed Four arithmetic operations, absolute value, exponentiation, common logarithm, square root, moving average, differentiation (primary, secondary), integration (primary, secondary), parallel displacement along time axis, trigonometric functions, reverse trigonometric functions, integration time correction for each NPLC setting, auto-saves of calculation results
Memory segmentation	• Max. 1024 blocks, sequential storage, multi-block storage
Other functions	• X-Y waveform synthesis (1 screen, 4 screens) • Overlay (always overlay when started/overlay only required waveforms) • Automatic/ Manual/ A-B cursor range printing/ Report printing • Logging is not available

Memory recording method


Sampling is done at the set sampling period.



RECORDER (Real-time recording)	
Time axis	10 ms to 1 hour/div, 19 ranges, time axis resolution 100 points/div Note: Out of data acquired at selected sampling rate, only maximum and minimum value data determined using 100 points/div units are stored Time axis compression selectable in 13 steps, from × 1/2 to × 1/20000
Sampling rate	1/10/100 μs 1/10/100 ms (selectable from 1/100 or less of time axis)
Real-time printing	Supported * Real-time printing is possible at time axis settings slower than 500 ms/div * Delayed print is performed when recording length is not set to "Continuous" and time axis setting is 10 ms - 200 ms/div * When recording length is set to "Continuous" and time axis setting is 10 ms - 200 ms/div, manual printing can be performed after measurement stop
Recording length	Built-in presets of 25 - 50000 div, or "Continuous" or arbitrary setting in 1 div steps (max. 80000 div)
Waveform memory	Store data for most recent 80000 div in memory
Auto save	Data is automatically saved on CF card, USB memory stick or internal SSD after measurement stops
Other functions	• Manual/ A-B cursor range printing/ Report printing • Logging is not available

Recorder recording method

High-speed sampling is performed at the set sampling frequency, culling data other than the maximum and minimum values to create the recording data of a certain time.

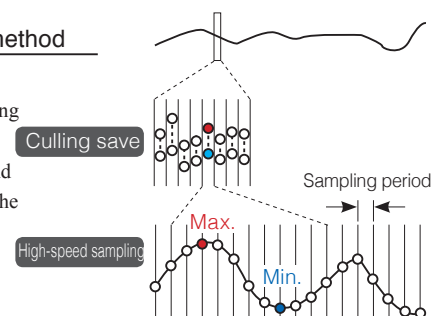

X-Y RECORDER (X-Y real-time recording)	
Sampling period	1/10/100 ms (dot), 10/100 ms (line)
Recording length	Continuous
Screen, Printing	Split screen (1 or 4), Manual printing only
Number of X-Y	1 to 8 phenomenon
X-Y channel setting	Any 8 channels out of 16 can be selected for X axis and Y axis respectively
X-Y axis resolution	25 dots/div (screen), horizontal 80 dots/div × vertical 80 dots/div (printer)
Waveform memory	Sampling data for last 16000000 points are stored in memory
Pen up/down	Simultaneous for all phenomena
External pen control	Possible via external input connector (simultaneous up/down for all phenomena)


FFT	
Analysis mode	Storage waveform, Linear spectrum, RMS spectrum, Power spectrum, Density of power spectrum, Cross power spectrum, Auto-correlation function, Histogram, Transfer function, Cross-correlation function, Impulse response, Coherence function, 1/1 Octave analysis, 1/3 Octave analysis, LPC analysis, Phase spectrum
Analysis channels	Selectable from all analog input channels
Frequency range	133 mHz to 8 MHz, External, (resolution 1/400, 1/800, 1/2000, 1/4000)
Number of sampling points	1000, 2000, 5000, 10000 points
Window functions	Rectangular, Hanning, Hamming, Blackman, Blackman-Harris, Flat-top, Exponential
Display format	Single, Dual, Nyquist, Running spectrum
Averaging function	Time axis / frequency axis simple averaging, Exponential averaging, Peak hold (frequency axis), Averaging times (2 to 10000 times)
Print functions	Same as the MEMORY function (partial print not available)

Trigger functions	
Trigger mode	MEMORY (high-speed recording), FFT: Single, Repeat, Auto RECORDER (real-time recording): Single, Repeat
Trigger sources	CH1 to CH32 (analog), Standard Logic 32ch + Logic Unit (Max. 2 units 32 channels), External (a rise of 2.5V or terminal short circuit), Timer, Manual (either ON or OFF for each source), Logical AND/OR of sources
Trigger types	<ul style="list-style-type: none"> Level: Triggering occurs when preset voltage level is crossed (upwards or downwards) Voltage drop: Triggering occurs when voltage drops below peak voltage setting (for 50/60 Hz AC power lines only) Window: Triggering occurs when window defined by upper and lower limit is entered or exited Period: Rising edge or falling edge cycle of preset voltage value is monitored and triggering occurs when defined cycle range is exceeded Glitch: Triggering occurs when pulse width from rising or falling edge of preset voltage value is under run Event setting: Event count is performed for each source, and triggering occurs when a preset count is exceeded Logic: 1, 0, or ×, Pattern setting
Level setting resolution	0.1% of full scale (full scale = 20 divisions)
Trigger filter	Selectable 0.1 div to 10.0 div 9 steps, or OFF (at MEMORY function) ON (10 ms fixed) or OFF (at RECORDER function)
Trigger output	Open collector (5 voltage output, active Low) At Level setting: pulse width (Sampling period × data number after trigger) At Pulse setting: pulse width (2 ms)
Other functions	Trigger priority (OFF/ON), Pre-trigger function for capturing data from before / after trigger event (at MEMORY function), Level display during trigger standby, Start and stop trigger (At RECORDER function), Trigger search function


Other functions	
Waveform judgment function (In MEMORY or FFT function)	<ul style="list-style-type: none"> Area comparison with reference waveform area for time domain waveform, X-Y waveform, or FFT analysis waveform Parameter calculated value comparison with reference value Output: GO/NG decision, Open-collector 5V, *100 msec/div (1 msec sampling) and thereafter allows for evaluation in almost real-time.

How is FFT Analysis Performed?


Designate a range of the waveform stored in the memory function to perform FFT analysis. It is rendered simultaneously on the screen.

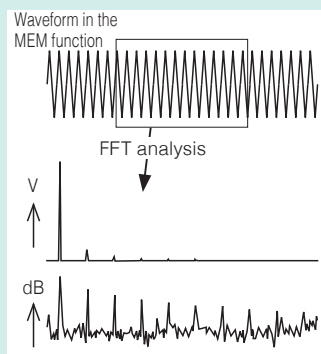


Display the spectrum as it changes over time in 3-D.

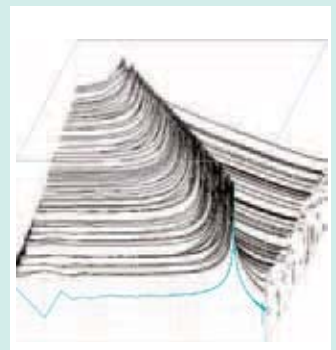

Convert data measured with few calculation points into data with many points for re-analysis.
*Not possible with frequency averaging ON



Scale by dB. Input the overall value (sum of the power spectrum) directly as a dB value.



Optional Specifications (sold separately)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



ANALOG UNIT 8966 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5 k/50 k/500 kHz
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	20 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% of full scale (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 5 MHz -3 dB, (with AC coupling: 7 Hz to 5 MHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 204.5 mm (8.05 in) D, approx. 240 g (8.5 oz)
Accessories: Ferrite clamp × 2



TEMP UNIT 8967 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for temperature measurement with thermocouple (voltage measurement not available)
Input terminals	Thermocouple input: plug-in connector, Recommended wire diameter: single-wire, 0.14 to 1.5 mm ² , braided wire 0.14 to 1.0 mm ² (conductor wire diameter min. 0.18 mm), AWG 26 to 16 Input impedance: min. 5 MΩ (with line fault detection ON/OFF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Temperature measurement range	10°C (50°F)/div (-100°C to 200°C (-148°F to 392°F)), 50°C (122°F)/div (-200°C to 1000°C (-328°F to 1832°F)), 100°C (212°F)/div (-200°C to 2000°C (-328°F to 3632°F)), 3 ranges, full scale: 20 div, Measurement resolution: 1/1000 of measurement range (using 16-bit A/D conversion)
Thermocouple range (JIS C 1602-1995) (ASTM E-988-96)	K: -200°C to 1350°C (-328°F to 2462°F), J: -200°C to 1100°C (-328°F to 2012°F), E: -200°C to 800°C (-328°F to 1472°F), T: -200°C to 400°C (-328°F to 752°F), N: -200°C to 1300°C (-328°F to 2372°F), R: 0°C to 1700°C (32°F to 3092°F), S: 0°C to 1700°C (32°F to 3092°F), B: 400°C to 1800°C (752°F to 3272°F), W (WRε5-26): 0°C to 2000°C (32°F to 3632°F), Reference junction compensation: internal/ external (switchable), Line fault detection ON/OFF possible
Data refresh rate	3 methods, Fast: 1.2 ms (digital filter OFF), Normal: 100 ms (digital filter 50/60 Hz), Slow: 500 ms (digital filter 10 Hz)
Measurement accuracy	Thermocouple K, J, E, T, N: ±0.1% of full scale ±1°C (±1.8°F) (±0.1% of full scale ±2°C (±3.6°F) at -200°C to 0°C (-328°F to 32°F)), Thermocouple R, S, B, W: ±0.1% of full scale ±3.5°C (±6.3°F) (at 0°C (32°F) to less than 400°C (752°F)); However, no accuracy guarantee of less than 400°C (752°F) for B, ±0.1% f.s. ±3°C (±5.4°F) (at 400°C (752°F) or more) Reference junction compensation accuracy: ±1.5°C (±2.7°F) (added to measurement accuracy with internal reference junction compensation)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



HIGH RESOLUTION UNIT 8968 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5k/50k Hz
Anti-aliasing filter	Integrated filter for suppressing aliasing distortion caused by FFT processing (automatic cutoff frequency setting/OFF)
Measurement resolution	1/1600 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.3% of full scale (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 100 kHz -3 dB (with AC coupling: 7 Hz to 100 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 245 g (8.6 oz)
Accessories: Conversion cable L9769 × 2 (cable length 60 cm/1.97 ft)



STRAIN UNIT U8969 (Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less, after 30 minutes of warm-up time and auto-balancing, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for distortion measurement (electronic auto-balancing, balance adjustment range within ±10 000 με or less)
Input terminals	NDIS connector EPRC07-R9FNDIS (via Conversion Cable L9769, NDIS connector PRC03-12A10-7M10.5) Max. rated voltage to ground: 30 V rms or 60 V DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Suitable transducer	Strain gauge converter, Bridge impedance: 120 Ω to 1 kΩ, Bridge voltage: 2 V ±0.05 V, Gauge rate: 2.0
Measurement range	20 με to 1000 με/div, 6 ranges, full scale: 20 div, Low-pass filter: 5/10/100 Hz, 1 kHz
Measurement resolution	1/1250 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	200 kS/s (simultaneous sampling across 2 channels)
Measurement accuracy After auto-balancing	±0.5% f.s. ±4 με (5 Hz filter ON)
Frequency characteristics	DC to 20 kHz +1/-3 dB

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



FREQ UNIT 8970 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage input based frequency measurement, rotation, power frequency, integration, pulse duty ratio, pulse width
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Frequency mode	Range: Between DC to 100 kHz (minimum pulse width 2 μs), 1 Hz/div to 5 kHz/div (full scale = 20 div), 8 settings Accuracy: ±0.1% f.s. (exclude 5 kHz/div), ±0.7% f.s. (at 5 kHz/div)
Rotation mode	Range: Between 0 to 2 million rotations/minute (minimum pulse width 2 μs), 100 (r/min)/div to 100 k (r/min)/div (full scale = 20 div), 7 settings Accuracy: ±0.1% f.s. (excluding 100 k (r/min)/div), ±0.7% f.s. (at 100 k (r/min)/div)
Power frequency mode	Range: 50 Hz (40 to 60 Hz), 60 Hz (50 to 70 Hz), 400 Hz (390 to 410 Hz) (full scale = 20 div), 3 settings Accuracy: ±0.03 Hz (50, 60 Hz), ±0.1 Hz (400 Hz range)
Integration mode	Range: 2 k counts/div to 1 M counts/div, 6 settings Accuracy: ±range/2000
Duty ratio mode	Range: Between 10 Hz to 100 kHz (minimum pulse width 2 μs), 5%/div (full scale = 20 div) Accuracy: ±1% (10 Hz to 10 kHz), ±4% (10 kHz to 100 kHz)
Pulse width mode	Range: Between 2 μs to 2 sec, 500 μs/div to 100 ms/div (full scale = 20 div), Accuracy: ±0.1% f.s.
Measurement resolution	1/2000 of range (Integration mode), 1/500 of range (exclusive integration, power frequency mode), 1/100 of range (power frequency mode)
Input voltage range and threshold level	±10 V to ±400 V, 6 settings, selectable threshold level at each range
Other functions	Slope, Level, Hold, Smoothing, Low-pass filter, Switchable DC/AC input coupling, Frequency dividing, Integration over-range keep/return

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: CONVERSION CABLE 9318 × 2 (To connect the current sensor to the 8971)



CURRENT UNIT 8971 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, Current measurement with optional current sensor,
Input terminals	Sensor connector (input impedance 1 MΩ, exclusive connector for current sensor via conversion cable the 9318, common GND with recorder)
Compatible current sensors	CT6863, CT6862, 9709, CT6841, CT6843, CT6844, CT6845, 9272-10 (To connect the 8971 via conversion cable the 9318)
Measurement range	Using 9272-10 (20 A), CT6841: 100 mA to 5 A/div (f.s. = 20 div, 6 settings) Using CT6862: 200 mA to 10 A/div (f.s. = 20 div, 6 settings) Using 9272-10 (200 A), CT6843, CT6863: 1 A to 50 A/div (f.s. = 20 div, 6 settings) Using CT6844, CT6845, 9709: 2 A to 100 A/div (f.s. = 20 div, 6 settings)
Measurement accuracy (with 5 Hz filter ON)	±0.65% f.s. RMS amplitude accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 10 kHz) RMS response time: 100 ms (rise time from 0 to 90% of full scale), Crest factor: 2 Frequency characteristics: DC to 100 kHz, ±3 dB (with AC coupling: 7 Hz to 100 kHz)
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Other functions	Input coupling: AC/DC/GND, Low-pass filter: 5, 50, 500, 5 k, 50 kHz

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



DC/RMS UNIT 8972 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage measurement, DC/RMS selectable
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5 k/100 kHz
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% of full scale (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS amplitude accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz), ±3% of full scale (1 kHz to 100 kHz) Response time: SLOW 5 s (rise time from 0 to 90% of full scale), MID 800 ms (rise time from 0 to 90% of full scale), FAST 100 ms (rise time from 0 to 90% of full scale), Crest factor: 2
Frequency characteristics	DC to 400 kHz -3 dB, (with AC coupling: 7 Hz to 400 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 190 g (6.7 oz)
Accessories: None



LOGIC UNIT 8973	
Measurement functions	Number of channels: 16 channels (4 ch/1 probe connector × 4 connectors)
Input terminals	Mini DIN connector (for HIOKI logic probes only), Compatible logic probes: 9320-01, 9327, MR9321-01

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 260 g (9.2 oz)
Accessories: None



DIGITAL VOLTMETER UNIT MR8990 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and calibration. Accuracy guaranteed for 1 year. Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for DC voltage measurement
Input terminals	Banana input connectors (Input resistance: 100 MΩ or higher with 100 mV f.s. to 10 V f.s. range, otherwise 10 MΩ) Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	100 mV f.s. (5 mV/div) to 1000 V f.s. (50 V/div), 5 ranges, full scale: 20 div
Measurement resolution	1/50 000 of measurement range (using 24 bit ΔΣ modulation A/D)
Integration time	20 ms ×NPLC (during 50 Hz), 16.67 ms ×NPLC (during 60 Hz)
Response time	2 ms +2× integration time or less (rise - f.s. → + f.s., fall + f.s. → - f.s.)
Basic measurement accuracy	±0.01% rdg. ±0.0025% f.s. (at range of 1000 mV f.s.)
Maximum input voltage	500 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)
Accessories: None



HIGH-VOLTAGE UNIT U8974 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment. Accuracy guaranteed for 1 year. Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for voltage measurement, DC/RMS selectable Maximum rated voltage to ground: 1000 V AC or DC (CAT III), 600 V AC or DC (CAT IV)
Input terminals	Banana input terminal (Input impedance: 4 MΩ, Input capacitance: 5 pF)
Measurement range	200 mV, 500 mV, 1, 2, 5, 10, 20, 50 V/div (DC mode) 500 mV, 1, 2, 5, 10, 20, 50 V/div (RMS mode)
Measurement resolution	1/1600 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s
Measurement accuracy	±0.25% f.s. (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS accuracy: ±1.5% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 100 kHz) Response time: High speed 150 ms, Medium speed 500 ms, Low speed 2.5 s
Frequency characteristics	DC to 100 kHz -3 dB
Input coupling	DC / GND
Maximum input voltage	1000 V DC, 700 V AC

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



ARBITRARY WAVEFORM GENERATOR UNIT U8793 <small>(Accuracy at 23 ±5°C/73 ±9°F, 60% rh or less after 30 minutes or more of warm-up time. Power supply frequency range of resolved MEMORY RECORDER at 50 Hz/60 Hz ±2 Hz. Accuracy guaranteed for 1 year. Post-adjustment accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 2, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 33 V rms AC or 70 V DC
Output voltage range	-10 V to 15 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	10 mA (Allowable load resistance: 1.5 kΩ or more)
FG function	DC, Sine wave, Square wave, Pulse wave, Triangular wave, Ramp wave, Output frequency: 0 Hz to 100 kHz
Arbitrary waveform generator mode	Waveforms measured by MR8847A, etc., generated by Hioki Model 7075 or SF8000, CSV waveforms D/A refresh rate: 2 MHz (using 16-bit D/A)
Sweep function	Frequency, Amplitude, Offset, Duty (Pulse only)
Program function	Max. 128 steps (Number of loops for each step, Number of total loops)
Other	Self-test function (Voltage), External input/output control

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)
Accessories: None



WAVEFORM GENERATOR UNIT MR8790 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less after 30 minutes of warm-up time. Accuracy guaranteed for 1 year. Post-adjustment accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 4, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 33 V rms AC or 70 V DC
Output voltage range	-10 V to 10 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	5 mA
Output function	DC, Sine wave (Output frequency range: 0 Hz to 20 kHz)
Accuracy	Amplitude accuracy: ±0.25% of setting ±2 mV p-p (1 Hz to 10 kHz) Offset accuracy: ±3 mV DC output accuracy: ±0.6 mV
Other	Self-test function (Voltage, Current)

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)
Accessories: None



PULSE GENERATOR UNIT MR8791 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less with no condensation. Accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 8, Connector: D-sub, half-pitch, 50-pin Max. rated voltage to ground: 33 V rms AC or 70 V DC (between unit and output channels) Logic output/Open collector output
Output mode 1	Pattern output: Read frequency: 0 Hz to 120 kHz, 2048 logic patterns Pulse output: Frequency 0 Hz to 20 kHz, Duty 0.1% to 99.9%
Output mode 2	Logic output: Output voltage level: 0 V to 5 V (H level: 3.8 V or more, L level: 0.8 V or less) Open collector output: Absolute maximum rated voltage for collector/emitter: 50 V Overcurrent protection: 100 mA
Other	Self-test function

Cable length and mass: Input side: 70 cm (2.30 ft), Output side: 1.5 m (4.92 ft), Approx. 170 g (6.0 oz)



DIFFERENTIAL PROBE P9000 <small>(Accuracy guaranteed for 1 year. Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement modes	P9000-01: For waveform monitor output, Frequency characteristics: DC to 100 kHz -3 dB P9000-02: Switches between waveform monitor output/AC effective value output Wave mode frequency characteristics: DC to 100 kHz -3 dB, RMS mode frequency characteristics: 30 Hz to 10 kHz, Response time: Rise 300 ms, Fall 600 ms
Division ratio	Switches between 1000:1, 100:1
DC output accuracy	±0.5% f.s. (f.s. = 1.0 V, division ratio 1000:1), (f.s. = 3.5 V, division ratio 100:1)
Effective value measurement accuracy	±1% f.s. (30 Hz to less than 1 kHz, sine wave), ±3% f.s. (1 kHz to 10 kHz, sine wave)
Input resistance/capacity	H-L: 10.5 MΩ, 5 pF or less (At 100 kHz)
Maximum input voltage	1000 V AC, DC
Maximum rated voltage to ground	1000 V AC, DC (CAT III)
Operating temperature range	-40°C to 80°C (-40°F to 176°F)
Power supply	(1) AC adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter), 0.9 VA (main unit only) (2) USB bus power (5 V DC, USB micro-B connector), 0.8 VA (3) External power source 2.7 V to 15 V DC, 1 VA
Accessories	Instruction manual x1, Alligator clip x2, Carrying case x1

Cable length and mass: Main unit cable 1.3 m (4.27 ft), input section cable 46 cm (1.51 ft), approx. 350 g (12.3 oz)



DIFFERENTIAL PROBE 9322 <small>(Accuracy guaranteed for 1 year)</small>	
Functions	For high-voltage floating measurement, power line surge noise detection, RMS rectified output measurement
DC mode	For waveform monitor output, Frequency characteristics: DC to 10 MHz (±3 dB), Amplitude accuracy: ±1% of full scale (at max. 1000 V DC), ±3% of full scale (at max. 2000 V DC) (full scale: 2000 V DC)
AC mode	For detection of power line surge noise, Frequency characteristics: 1 kHz to 10 MHz ±3 dB
RMS mode	DC/AC voltage RMS output detection, Frequency characteristics: DC, 40 Hz to 100 kHz, Response speed: 200 ms or less (400 V AC), Accuracy: ±1% of full scale (DC, 40 Hz to 1 kHz), ±4% of full scale (1 kHz to 100 kHz) (full scale: 1000 V AC)
Input	Input type: balanced differential input, Input impedance/capacitance: H-L 9 MΩ/10 pF, H/L-unit 4.5 MΩ/20 pF, Max. rated voltage to ground: when using grabber clip 1500 V AC/DC (CAT II), 600 V AC/DC (CAT III), when using alligator clip: 1000 V AC/DC (CAT II), 600 V AC/DC (CAT III)
Maximum input voltage	2000 V DC, 1000 V AC (CAT II), 600 V AC/DC (CAT III)
Output	Voltage divider for 1/1000 of input, BNC connectors (output switchable for 3 modes DC, AC, RMS)
Power supply	Any of the following: (1) AC Adapte 9418-15, (2) Power Cord 9248 with Probe Power Unit 9687, (3) Power Cord 9324 + Conversion Cable 9323 with HiCORDER Logic terminal, (4) Power Cord 9325 with F/V Unit 8940

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 30 cm (0.98 ft), approx. 150 g (5.3 oz)
Note: The unit-side plug of the 9320-01 and 9327 is different from the 9320.



LOGIC PROBE 9320-01/9327	
Functions	Detection of voltage signal or relay contact signal for High/Low state recording
Input	4 channels (common ground between unit and channels), digital/contact input, switchable (contact input can detect open-collector signals) Input resistance: 1 MΩ (with digital input, 0 to +5 V) 500 kΩ or more (with digital input, +5 to +50 V) Pull-up resistance: 2 kΩ (contact input: internally pulled up to +5 V)
Digital input threshold	1.4 V / 2.5 V / 4.0 V
Contact input detection resistance	1.4 V: 1.5 kΩ or higher (open) and 500 Ω or lower (short) 2.5 V: 3.5 kΩ or higher (open) and 1.5 kΩ or lower (short) 4.0 V: 25 kΩ or higher (open) and 8 kΩ or lower (short)
Response speed	9320-01: 500 ns or lower, 9327: detectable pulse width 100 ns or higher
Maximum input voltage	0 to +50 V DC (the maximum voltage that can be applied across input pins without damage)

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 1 m (3.28 ft), approx. 320 g (11.3 oz)
Note: The unit-side plug of the MR9321-01 is different from the MR9321.



LOGIC PROBE MR9321-01	
Functions	Detection of AC or DC relay drive signal for High/Low state recording Can also be used for power line interruption detection
Input	4 channels (isolated between unit and channels), HIGH/LOW range switching Input resistance: 100 kΩ or higher (HIGH range), 30 kΩ or higher (LOW range)
Output (H) detection	170 to 250 V AC, ±DC 70 to 250 V (HIGH range) 60 to 150 V AC, ±DC 20 to 150 V (LOW range)
Output (L) detection	0 to 30 V AC, ±DC 0 to 43 V (HIGH range) 0 to 10 V AC, ±DC 0 to 15 V (LOW range)
Response time	Rising edge 1 ms max., falling edge 3 ms max. (with HIGH range at 200 V DC, LOW range at 100 V DC)
Maximum input voltage	250 V rms (HIGH range), 150 V rms (LOW range) (the maximum voltage that can be applied across input pins without damage)


System Chart of Options

Model : MEMORY HiCORDER MR8827

Model No. (Order Code) (Note)

MR8827 (Max. 32ch, 512MW memory, main unit only)

*Cannot operate alone. You must install other options

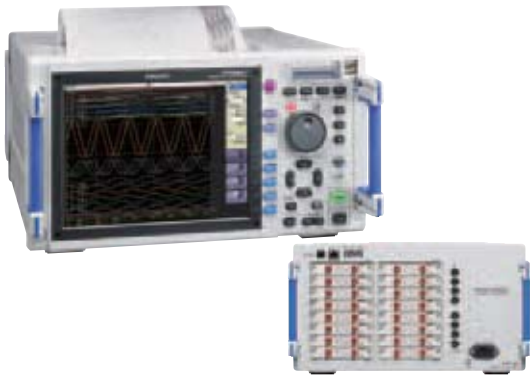

Note: Main unit MR8827 cannot operate alone. You must install one or more optional input modules in the unit.

Printer options

*PRINTER UNIT is a built-in option that must be specified upon order.



PRINTER UNIT U8350
Specified upon order. Printing width 200 mm (7.87 inch).
Compatible recording paper: Model 9231

RECORDING PAPER 9231
A4 width 216 mm (8.50 in) x 30 m (98.43 ft), 6 rolls/set

Factory-installed option *Must specify when ordering



SSD UNIT U8330
Specified upon order; built-in type, 128 GB

Storage media

* The CF card includes a PC card adapter.

* CF Card Precaution

Use only CF Cards sold by HIOKI. Compatibility and performance are not guaranteed for CF cards made by other manufacturers. You may be unable to read from or save data to such cards.



PC CARD 2G 9830
(2 GB)

PC CARD 1G 9729
(1 GB)

PC CARD 512M 9728
(512 MB)

PC Software



WAVE PROCESSOR 9335
Convert data, print and display waveforms



LAN COMMUNICATOR 9333
• Waveform data collect function
• Remote control with the PC



iPad App for MEMORY HiCORDER HMR Terminal
Download from the App Store (exclusively for Apple iPad)



LAN CABLE 9642
Straight Ethernet cable, supplied with straight to cross conversion cable, 5 m (16.41 ft) length

Case



CARRYING CASE (special order)
hard trunk type
Inquire with your local Hioki distributor.

Input modules

* Input cords not included. Please purchase them separately.
* When using 9709 with Current Unit 8971, a total of 7 current probes can be used.



ANALOG UNIT 8966
2 ch, Voltage input, DC to 5 MHz bandwidth



TEMP UNIT 8967
2 ch, thermocouple temperature input



HIGH RESOLUTION UNIT 8968
2 ch, voltage input, DC to 100 kHz bandwidth



STRAIN UNIT U8969
2 ch, strain gauge type converter amp



Conversion Cable L9769
(For and bundled with the U8969 strain unit)



FREQ UNIT 8970
2 ch, for measurement of frequency, RPM, pulse, etc.



CURRENT UNIT 8971
2 ch, for measuring current using dedicated current sensors,
bundled two Conversion cable 9318
Note: Max. up to 4 modules can be installed in the MR8847A, MR8827



DC/RMS UNIT 8972
2 ch, voltage/DC to 400 kHz, RMS rectifier, DC and 30 to 100 kHz bandwidth



LOGIC UNIT 8973
4 terminals, 16 ch
Note: Max. up to 2 modules can be installed in the MR8827



DIGITAL VOLTMETER UNIT MR8990
2ch, high-precision DC V, 0.1 μ V resolution, maximum sampling rate 500 times/s



HIGH-VOLTAGE UNIT U8974
2ch, voltage input, max. 1000 V DC and 700 V AC

Output modules

* Input cords not included. Please purchase separately.



WAVEFORM GENERATOR UNIT MR8790
4ch, DC Output: \pm 10 V,
Sine wave output: 10 mHz to 20 kHz



PULSE GENERATOR UNIT MR8791
8ch, Pulse output: 0.1 Hz to 20 kHz, Pattern output



ARBITRARY WAVEFORM GENERATOR UNIT U8793
2ch, 10 mHz to 100 kHz function generator, arbitrary waveform generator with 2 MHz D/A refresh rate, -10 V to 15 V output

Output cable

* Please contact your local HIOKI distributor for connectors that support Model MR8791.




CONNECTION CABLE L9795-01
Maximum rated voltage to ground: 33 V AC rms or 70 V DC, SMB terminal - alligator clip, Cord length: 1.5 m (4.92 ft)




CONNECTION CABLE L9795-02
Maximum rated voltage to ground: 33 V AC rms or 70 V DC, SMB terminal - BNC terminal, Cord length: 1.5 m (4.92 ft)

Logic signal measurement



LOGIC PROBE 9327 
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 100 ns or more, miniature terminal type)



LOGIC PROBE MR9321-01 
4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)



LOGIC PROBE 9320-01
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)



CONVERSION CABLE 9323
* Used for connecting the 9320/9321/MR9321 and the 9324 to the Memory HiCorder with small logic terminal models * This cable is not required for the small-terminal types 9327, 9320-01, 9321-01 and MR9321-01.

INPUT CORD (A)

* Voltage is limited to the specifications of the input modules in use



CONNECTION CORD L9790
Flexible ϕ 4.1 mm (0.16 in) thin dia. cable allowing for up to 600 V input, 1.8 m (5.91 ft) length * The end clip is sold separately.

ALLIGATOR CLIP L9790-01
Red/black set attaches to the ends of the cables L9790

GRABBER CLIP 9790-02
Red/black set attaches to the ends of the cables L9790 * When this clip is attached to the end of the L9790, input is limited to CAT II 300 V. Red/black set.

CONTACT PIN 9790-03
Red/black set attaches to the ends of the cables L9790

INPUT CORD (B)

* Voltage is limited to the specifications of the input modules in use



CONNECTION CORD L9198
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 300 V input, 1.7 m (5.58 ft) length, small alligator clip

CONNECTION CORD L9197
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 600 V input, 1.8 m (5.91 ft) length, detachable large alligator clips are bundled

GRABBER CLIP 9243
Attaches to the tip of the banana plug cable, CAT III 1000 V, 196 mm (7.72 in) length

INPUT CORD (C)

* This probe does not expand the maximum rated voltage above ground of an isolated input.



10:1 PROBE 9665
Max. rated voltage to earth is same as for input module, max. input voltage 1 kV rms (up to 500 kHz), 1.5 m (4.92 ft) length

10:1 PROBE 9666
Max. rated voltage to earth is same as for input module, max. input voltage 5 kV peak (up to 1MHz), 1.5 m (4.92 ft) length

INPUT CORD (D)

* Voltage to ground is within this product's specifications, separate power source is also required.



DIFFERENTIAL PROBE P9000-01
(Wave Only) For Memory HiCorder, 1 kV AC, DC, Frequency band: 100 kHz

DIFFERENTIAL PROBE P9000-02
(Switch between Wave/RMS) For Memory HiCorder, 1 kV AC, DC, Frequency band: 100 kHz

AC ADAPTER Z1008
100 to 240 V AC

INPUT CORD (E)

* Voltage to ground is within this product's specifications, separate power source is also required.



DIFFERENTIAL PROBE 9322
1 kV AC, 2 kV DC, Frequency band: 10 MHz

AC ADAPTER 9418-15
100 to 240 V AC

INPUT CORD (F)

* Voltage input via banana terminals limited by the voltage specifications of the respective input unit.



CONNECTION CABLE L4940
Banana plug - banana plug, Cord length: 1.5 m (4.92 ft)

EXTENSION CABLE L4931
Extend the length of banana plug cables, Cable length: 1.5 m (4.92 ft)

ALLIGATOR CLIP L4935
Attach to the tip of banana plug cables, CAT IV 600 V, CAT III 1000 V

BUS BAR CLIP L4936
Attach to the tip of banana plug cables, CAT III 600 V

MAGNETIC ADAPTER L4937
Attach to the tip of banana plug cables, CAT III 1000 V

GRABBER CLIP 9243
Attach to the tip of banana plug cables, red/black set, full length: 196mm (7.72 in), CAT III 1000 V

INPUT CORD (G)

*For the MR8990 *Voltage is limited to the specifications of the input modules in use



TEST LEAD L2200
Cable length: 70 cm, tips interchangeable with a pin test lead or alligator clip, maximum input voltage: CAT IV 600 V, CAT III 1000 V

* You can connect up to 4 Current Unit 8971 to the Memory HiCorder main unit, allowing up to 8 current sensors to be used.
* There is no limit if you connect a current sensor to the voltage input analog unit.

Up to 200 A (High precision) *ME15W (12-pin) terminal type

High-Precision pull-through current sensors, observe waveforms from DC to distorted AC

AC/DC CURRENT SENSOR CT6862-05, 1 MHz, 50 A

AC/DC CURRENT SENSOR CT6863-05, 500 kHz, 200 A

Observe waveforms from DC to distorted AC

AC/DC CURRENT PROBE CT6841-05, 1 MHz, 20 A

AC/DC CURRENT PROBE CT6843-05, 500 kHz, 200 A

Observe waveforms of distorted AC (cannot for DC)

CLAMP ON SENSOR 9272-05, 100 kHz, 200 A

Up to 1000 A (High precision) *ME15W (12-pin) terminal type

High-Precision pull-through current sensors, observe waveforms from DC to distorted AC

AC/DC CURRENT SENSOR 9709-05, 100 kHz, 500 A

Observe waveforms from DC to distorted AC

AC/DC CURRENT PROBE CT6844-05, 200 kHz, 500 A

AC/DC CURRENT PROBE CT6845-05, 100 kHz, 500 A

AC/DC CURRENT PROBE CT6846-05, 20 kHz, 1000 A

Precautions when connecting a high-precision current sensor to a Memory HiCorder

Connecting to the MR8847A / MR8827 / MR8740

- High-precision current sensor (ME15W) + CT9901 + 9318 \rightarrow CURRENT UNIT 8971
- High-precision current sensor (ME15W) + CT955x + BNC cable \rightarrow except CURRENT UNIT 8971
- High-precision current sensor (PL23) + 9318 \rightarrow CURRENT UNIT 8971
- High-precision current sensor (PL23) + CT9900 + CT955x + BNC cable \rightarrow except CURRENT UNIT 8971

Other current sensor types

The Memory HiCorder can be used with various types of current sensors and probes. For details, see product information on Hioki's website.

10 mA class to 500 A (High speed)

CLAMP ON PROBE 3273-50
Wide DC to 50 MHz bandwidth, 10 mA-class to 30 Arms

CLAMP ON PROBE 3276
Wide DC to 100 MHz bandwidth, 10 mA-class to 30 Arms

CLAMP ON PROBE 3274
Wide DC to 10 MHz bandwidth, up to 150 A rms

CLAMP ON PROBE 3275
Wide DC to 2 MHz bandwidth, up to 500 A rms

*A separate power supply (CT9555) is required in order to use a high-precision current sensor.
*Only sensors with ME15W (12-pin) terminals (-05 type) can be connected to the CT9555.
*The separately available Conversion Cable CT9900 is required in order to use a sensor with PL23 (10-pin) terminal.

POWER SUPPLY for Current Sensors

SENSOR UNIT CT9555 1ch, with Waveform output

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length

PL23 (10-pin) - ME15W (12-pin) conversion

CONVERSION CABLE CT9900
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

*The separately available Conversion Cable CT9900 is required in order to use a high-precision current sensor equipped with a ME15W (12-pin) terminal (-05 type) with the Current Measuring Module 8971 (which is designed for use with the MR8847, MR8827, and MR8740).
*While the CT955x is not required in order to use a sensor equipped with a PL23 (10-pin) terminal with the 8971 or 8940, the Conversion Cable 9318 (which comes with the 8971) is required for that setup.

Direct connectable with the Current Sensor

CURRENT UNIT 8971 For the MR8847, MR8827, MR8740

CONVERSION CABLE 9318 For the CT6841/43 or other

ME15W (12-pin) - PL23 (10-pin) conversion

CONVERSION CABLE CT9901
Convert ME15W (12-pin) terminal to PL23 (10-pin) terminal

Power supply * Necessary for use the 3270 series current probes

POWER SUPPLY 3272
For Hioki wide bandwidth current probes
• Single sensor connectable

POWER SUPPLY 3269
Connect up to four sensors

Custom cable *For P9000. Inquire with your local Hioki distributor.

- (1) Bus powered USB cable
- (2) USB(A)- Micro B cable
- (3) 3-prong cable

The CM7290 (available separately) is required in order to use these current sensors

100 A to 2000 A (Medium speed)

AC/DC CURRENT SENSOR CT7631, (Auto zero CT7731)
DC, 1 Hz to 10 kHz (-3dB), 100 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7636, (Auto zero CT7736)
DC, 1 Hz to 10 kHz (-3dB), 600 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7642, (Auto zero CT7742)
DC, 1 Hz to 10 kHz (5 kHz), 2000 A, 1 mV/A output

DISPLAY UNIT CM7290
Provides measurement, display, and output functionality when used with the CT7000s.

DISPLAY UNIT CM7291
with built-in Bluetooth® wireless technology

500 A to 5000 A *For commercial power lines, 50/60 Hz

CLAMP ON PROBE 9018-50
Good phase characteristics. Frequency characteristics: 40 Hz to 3 kHz, 10 to 500 A AC range, output 0.2 V AC f.s.

CLAMP ON PROBE 9132-50
Frequency characteristics: 40 Hz to 1 kHz, 20 to 1000 A AC range, output 0.2 V AC f.s.

AC FLEXIBLE CURRENT SENSOR CT9667-01/-02/-03
10 Hz to 20 kHz, 5000 A/ 500 A AC, 500 mV/f.s. output, ϕ 100 to 254 mm (3.94 to 10.00 in), 3 loop diameters

Leak Current *For commercial power lines, 50/60 Hz

CLAMP ON LEAK HISTER 3283
10 mA range/10 μ A resolution to 200 A range, with monitor/analog output 1 V f.s.

OUTPUT CORD L9094
3.5 mm (0.14 in) dia. mini plug to banana, 1.5 m (4.92 ft) length

CONVERSION ADAPTER 9199
Receiving side banana, output BNC terminal

OUTPUT CORD L9095
Connect to BNC terminal, 1.5 m (4.92 ft) length

OUTPUT CORD L9096
Connect to terminal block, 1.5 m (4.92 ft) length

AC ADAPTER 9445-02 For USA, 100 to 240 V AC

AC ADAPTER 9445-03 For EU 100 to 240 V AC

Non-contact Voltage measuring

NON-CONTACT AC VOLTAGE PROBE SP3000-01
5 Vrms rated, 10 Hz to 100 kHz band width

NON-CONTACT AC VOLTAGE PROBE SP3000
Sold individually

AC VOLTAGE PROBE SP9001
Sold individually

Other options for Input

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, signal output use, 1.6 m (5.25 ft) length

CONVERSION ADAPTER 9199
Receiving side banana terminal, output BNC terminal

CONNECTION CORD 9165
Metallic BNC at both ends, for metallic BNC terminals, 1.5 m (4.92 ft), not CE marked

CONVERSION CABLE 9318
For connecting CT6841/43 and similar probes to 8971/40/51.

Temperature sensor

THERMOCOUPLE
*For reference only. Please purchase locally.

ARBITRARY WAVEFORM GENERATOR UNIT U8793

Generate and record in a single unit



2 channels, SMB terminals

2 types of output cables (sold separately) ▶

Anomaly Simulation

Reproduce and output the observed waveforms without modification. When resolving problems observed during research or development, you can reproduce such problems for efficient testing.

Recommended units

ARBITRARY WAVEFORM
GENERATOR UNIT
U8793ANALOG UNIT
8966HIGH RESOLUTION
UNIT
8968Record anomalous
waveforms

Max. 15 V output + amplifier

Reproduce and output
anomalous waveforms

- Create power supply waveforms such as power supply dips, instantaneous interruptions, and voltage fluctuations for immunity tests to regulate malfunctions in equipment caused by power supply harmonics to perform evaluation testing.

Replace multiple DMMs with a single unit

Save space by replacing multiple desktop DMM units with a single MEMORY HiCORDER. This eliminates the need to control multiple units and simplifies your system.

Recommended units

DIGITAL VOLTMETER UNIT
MR89902 channels, banana input terminal
High precision, high resolutionInstall up to 16 DVM Units to
expand up to 32 channels

DIGITAL VOLTMETER UNIT MR8990

Fine precision and resolution

Proprietary specifications for DC voltage measurements

Measure minute fluctuations in sensor output for automobiles or voltage fluctuations in batteries with high precision and at high resolution. The maximum voltage that you can input is 500 V DC. Another feature is high input resistance.

Measurement range	Effective input range (Guaranteed measurement accuracy range)	Max. resolution	Input resistance	Measurement accuracy	
				NPLC: less than 1	NPLC: 1 or more
5 mV/div (f.s. = 100 mV)	-120 mV to 120 mV	0.1 μ V	100 M Ω or more	\pm 0.01% rdg. \pm 0.015% f.s.	\pm 0.01% rdg. \pm 0.01% f.s.
50 mV/div (f.s. = 1000 mV)	-1200 mV to 1200 mV	1 μ V		\pm 0.01% rdg. \pm 0.0025% f.s.	
500 mV/div (f.s. = 10 V)	-12 V to 12 V	10 μ V	10 M Ω \pm 5%	\pm 0.025% rdg. \pm 0.0025% f.s.	
5 V/div (f.s. = 100 V)	-120 V to 120 V	100 μ V			
50 V/div (f.s. = 1000 V)	-500 V to 500 V	1 mV			

- 6.5-digit display (Resolution: 0.1 μ V), 24-bit high resolution

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HIOKI

MEMORY HiCORDER MR8740, MR8741



Fully Integrate into High-Speed, Multi-channel Measurement Systems

Multi-channel

Up to 32 + 22 channels (MR8740)

The MR8740 uses a two-block internal architecture, essentially giving it the capabilities of two MEMORY HiCORDERs.

Up to 16 channels (MR8741)

High-speed isolated measurement

20 MS/s isolated sampling

Simultaneous 20M sampling within the same block

DVM UNIT MR8990

Digital Voltage Meter

Measure minute changes in voltage at a high level of precision. Simultaneous measurement of all channels--rather than scanner-type measurement--dramatically reduces cycle times.

Systems Integration

Ideal for rack-mounting

Height of 4U (180 mm) or less
MR8740: 177 (H) × 426 (W) mm
MR8741: 160 (H) × 350 (W) mm

CE

Are you having problems with multi-channel measurement or testing?

"We're using multiple DMM units with a scanner to switch inputs. Measurement takes too long..."


Reduced cycle times

"We need to perform many different types of measurements on a large number of channels."

Measure across multiple channels at the same time

"We're using multiple measuring instruments, and it's hard to control them all. The wiring is a mess..."

Simplified systems

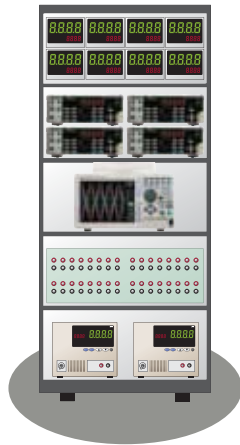

"We can't embed our oscilloscope, so we use it on a shelf. Our setup would be a lot sleeker if we could fit it in."

Rack-mountable design

"Tall, large racks are dangerous in a production setting. I wonder if our setup can be made smaller..."

Space-saving design

"I wish we could make measurements faster and at a higher level of precision."

High-speed, high-precision performance



Solve these issues with the MR8740/MR8741 Memory HiCorder.

A single-instrument solution for measuring multiple signal types and channels featuring rack-style measurement units that can be selected freely according to the target application

High precision and high resolution

DIGITAL VOLTAGE METER

DVM UNIT MR8990

The MR8990 can measure even minute voltages previously measured with a DMM. The MR8990 can capture minute voltage fluctuations as waveforms.



Features

High resolution: 24bit, 6.5-digit display

Thanks to a resolution of 0.1 μ V, the MR8990 can measure even minute fluctuations in the output voltage of sensors and other equipment.

High accuracy: $\pm 0.01\%$ rdg. $\pm 0.0025\%$ f.s.

The MR8990 performs measurements at a high precision of $\pm 0.01\%$ rdg. $\pm 0.0025\%$ f.s. and at speeds of up to 500 samples per second.


Max. allowable input: DC 500 V

The MR8990 can accommodate input ranging from minute to high voltages.

High input resistance

5mV/DIV to 500mV/DIV range: 100 M Ω or greater
5V/DIV to 50V/DIV range : 10 M Ω $\pm 5\%$

Input Unit Comparison Chart (Input Voltage and Sampling Speed)

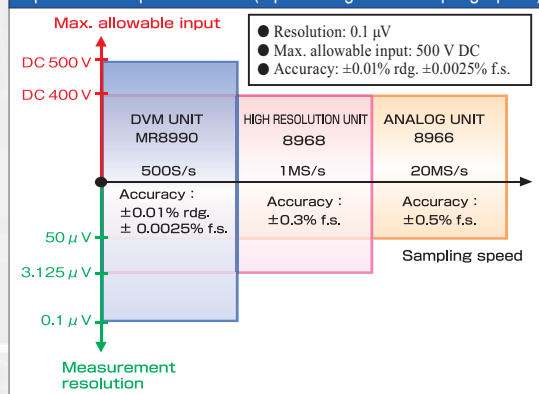

Extensive selection of Measurement or Output units

Thanks to a unit-based architecture that can accommodate voltage, current, temperature, frequency, distortion, measurement, and waveform output, the MR8740/MR8741 is a single-instrument solution for measuring multiple parameters. As a bonus, the ability to simultaneously record different signals on multiple channels cuts down on measurement times.


Ideal for rack-mounting

The MR8740/MR8741 ship standard with EIA standard-compliant rack-mounting hardware. The instruments also support JIS standard racks. Please contact HIOKI for more information.


The MR8740 is a rack-mountable instrument that can measure up to (32 + 22) channels. It uses a two-block architecture (32ch + 22ch), essentially giving it the capabilities of two Memory HiCorders.

MR8740 32ch + 22ch model

- Accommodates up to 27 measurement units.
- Two-block architecture (Block I: 16 units; block II: 11 units)
- Standard support for 16 logic channels

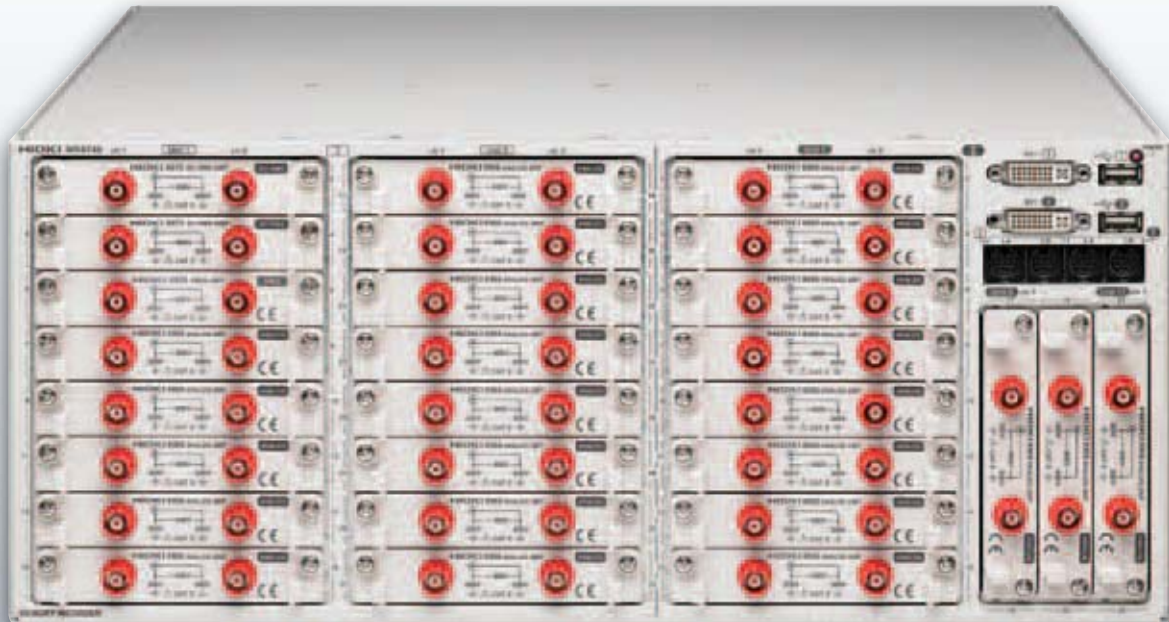

Support for multi-channel measurement of up to 54 channels. Switchable inter-block trigger synchronization

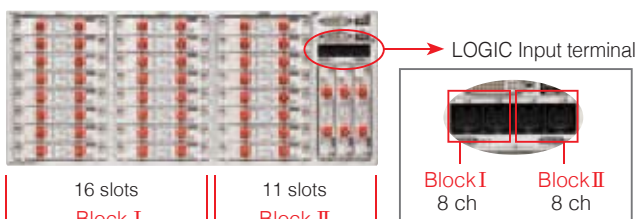

Block I : Analog 32ch, Logic 8ch
Block II : Analog 22ch, Logic 8ch

(There may be a lag of up to 1 μ s or 3 samples between blocks I and II.)

Example: Multi-channel DMM (DC V only)



By switching from a bench-type DMM to a DVM unit, you can cut down on the amount of space taken up by measuring instruments. With no need to control multiple instruments, you can also simplify your system.

Independent block operation. Support for applications using different functions

Since blocks I (32 channels) and II (22 channels) perform measurements independently, it is possible to set different function and sampling speeds for each block. Operations such as starting measurement are performed separately by each block, and different measurement data files are used by each block.

For example...

Block I : MEMORY function, 20MS/s
Block II : FFT function, 20MS/s

A single instrument supports a variety of measurements, expanding the range of applications in which the device can be used.




[Rear] LAN (100BASE-TX) and USB (type A, for USB flash memory or a mouse) connectors are standard on the rear of the instrument. The power inlet and power switch are also located here.

The MR8741 is a bench-top instrument that delivers affordable measurement performance. It features area judgment functionality and external control terminals.


MR8741 16ch model

- Accommodates up to 8 measurement units.
- Standard support for 16 logic channels
- Area judgment function and external control terminals

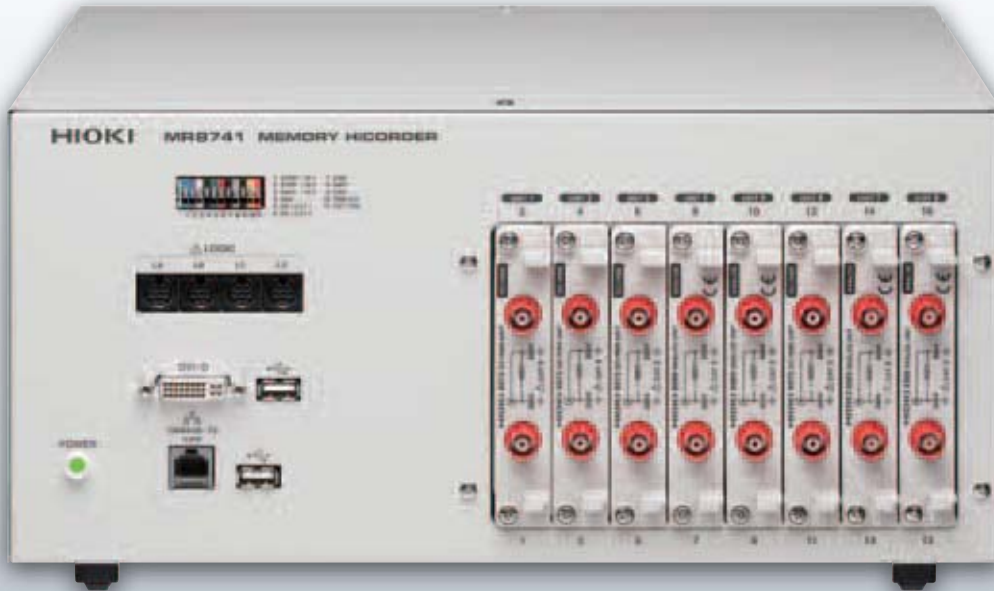

[Rear] A vent (fan), power inlet, and power switch are located on the rear of the instrument.

[Front panel]

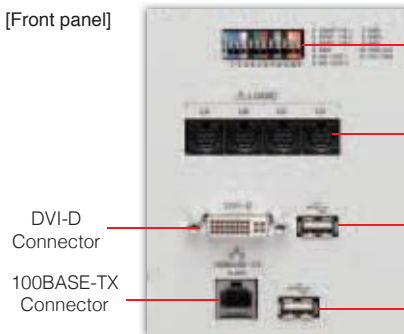

External control terminals

LOGIC terminals

DVI-D Connector
100BASE-TX Connector


USB Connector
(Type A, for USB memory stick or mouse)

Use as a multi-channel WAVE COMPARATOR.

High-speed waveform judgment function

The MR8741's waveform judgment function, which monitors whether a target waveform has diverged from an area with a safe margin, makes it easy to measure signal waveforms for which it can otherwise be difficult to make pass/fail judgments. The instrument can measure waveforms on multiple channels at the high speed of 20 MS/s, providing immediate pass/fail judgments in maintenance and production line applications.

When using a time-axis range slower than 100msec/div, measured waveforms can be compared in near real-time, enabling you to detect failures on the spot. Production can be halted in time to minimize resource waste.

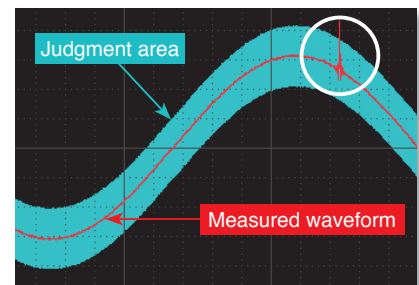

Compare captured waveform with reference area

Setting the waveform evaluation

[OUT] Return NG if any part of the waveform leaves the evaluation area.
[ALL OUT] Return NG if the entire waveform leaves the evaluation area.

Setting the GO/NG stop mode

[GO] Stop recording on GO result.
[NG] Stop recording on NG result.
[GO] Stop recording on GO or NG result.

Convenient functions


Display and mouse connectivity

Measure without using a PC.


By connecting a display and mouse to the MR8740/MR8741, you can display waveforms and operate the instrument with a mouse.

The monitor display screen uses the same layout as the MR8847 Memory HiCorder series display. A mouse can be used to operate and configure the instrument, providing a user experience that approximates use of a keyboard. (Display and mouse not included.)

Connect a display and mouse to enable standalone use.

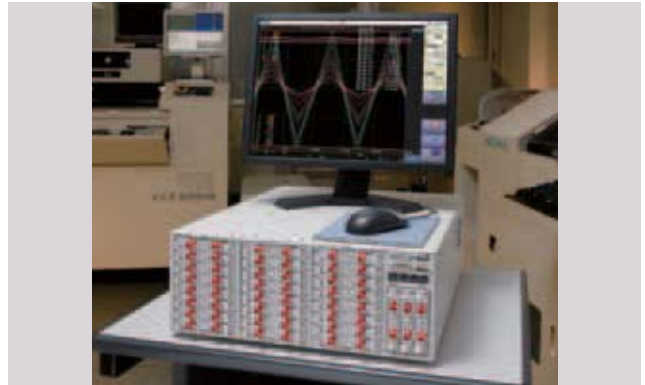

X-Y wave comparator MR8741 only

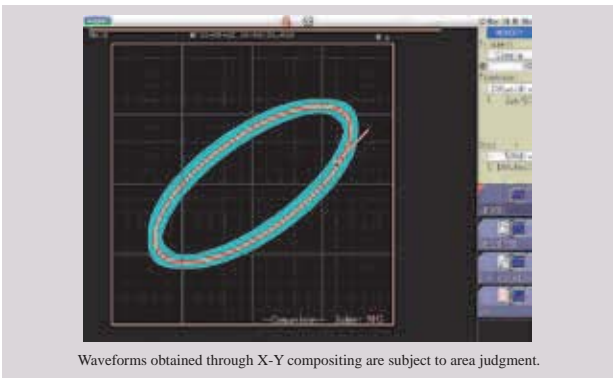

Waveforms obtained through X-Y compositing are subject to area judgment.

The MR8741 includes functionality for judging X-Y waveforms. Waveforms measured using the memory function and created with X-Y compositing are subject to area judgment.

The X-Y waveforms captured from these and many other applications can be tested against reference waveforms automatically:


- Alteration and pressure at press machines
- Pump pressure and flow

Numerical calculation function

Calculate parameter values from measured waveform


20 different built-in calculation types including effective (rms) value, peak value, and maximum value.

Multiple channels can be measured and judged at once, minimizing cycle times. Inter-channel calculations can also be performed at high speed by means of internal processing, and the results can be transferred to a computer.

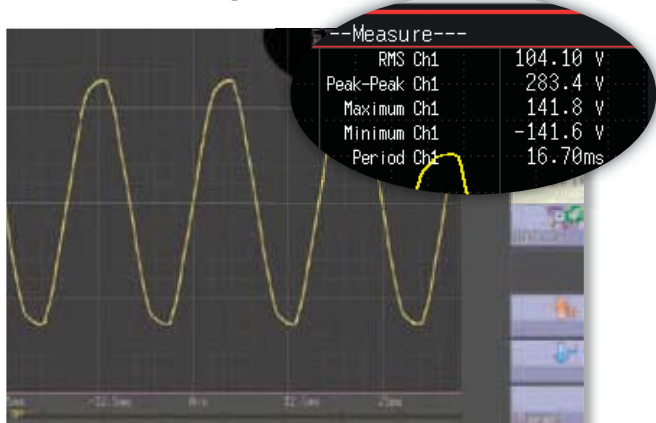


Numerical calculation results can be shown on waveform display

Value monitor (DMM display)

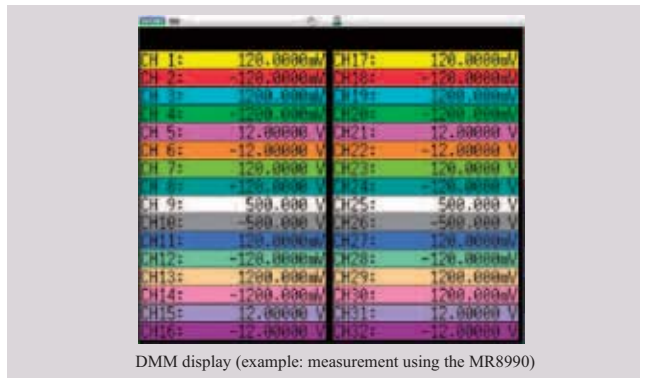



DMM display (example: measurement using the MR8990)

Input values can be monitored numerically in the manner of a digital multimeter (DMM).

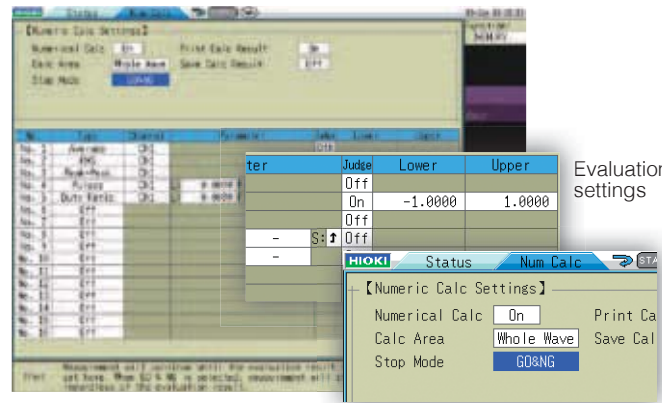

Numerical calculation settings

Evaluation settings



Signal Input and Output

The right module for your measurement needs

Inverter / UPS Test

- Operation testing and evaluation during load fluctuation
- Confirmation of UPS switching

Recommended units

ANALOG UNIT 8966
LOGIC UNIT 8973
CURRENT UNIT 8971

Perfect for inverter and UPS evaluation / start-up tests. Record using both logic (control signals) and analog (primary/secondary voltage or current for a UPS or inverter).



UPS



Inverter


Power Monitor and Logger

- Identify power fluctuations when power supply is turned ON/OFF and during load fluctuations
- Long-term fluctuations in power

Recommended units

ANALOG UNIT 8966
HIGH RESOLUTION UNIT 8968
FREQ UNIT 8970

Load the analog output for the rms (instant power / voltage / current, etc.) calculated by the power analyzer, or import the waveform output from the power analyzer to observe data for long-term tests or irregular waveforms.

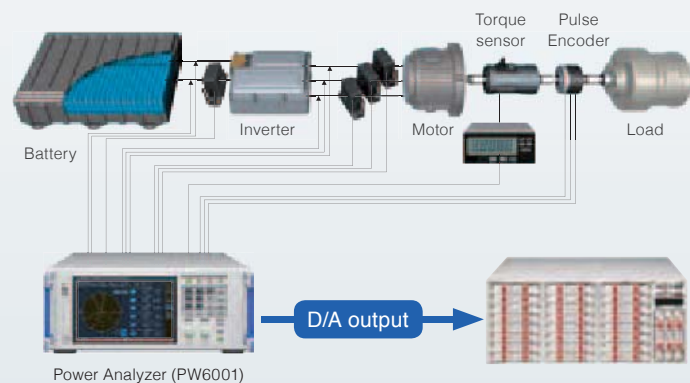

Power Analyzer (PW6001)

Control Simulation

- Generate simulated output of each type of sensor signal
- Fluctuating simulated output for 12 V DC car batteries

Recommended units

ARBITRARY WAVEFORM GENERATOR UNIT U8793
WAVEFORM GENERATOR UNIT MR8490
PULSE GENERATOR UNIT MR8791

Use actual waveforms to perform testing on control boards, such as for engine control, airbags, brake systems, power steering, and active suspension. This allows efficient simulation of actual waveforms obtained from cars.



Perfect for control testing of automobiles, high speed trains, and traditional trains

13 units to choose from

Generation	Voltage	DC voltage	Generation	Pulse	Voltage
ARBITRARY WAVEFORM GENERATOR UNIT U8793	HIGH VOLTAGE UNIT U8974	DIGITAL VOLTMETER UNIT MR8990	WAVEFORM GENERATOR UNIT MR8790	PULSE GENERATOR UNIT MR8791	ANALOG UNIT 8966
No. of channels: 2 Arbitrary waveform output	Measurement resolution: 16-bit 1/1600 of measurement range	Measurement resolution: 24-bit 1/50 000 of measurement range	No. of channels: 4 Waveform output	No. of channels: 8 Pulse output	Measurement resolution: 12-bit 20 MS/s high-speed sampling
• Output frequency range 10m Hz to 100 kHz • Max. output: 15 V	• High voltage • Commercial power supply (primary/secondary) • Power equipment characteristics testing	• Multi-channel • Minute sensor voltage • EV battery voltage	• DC output: -10 V to 10 V • Sine wave output 10 mHz to 20 kHz	• Pulse output 0.1 Hz to 20 kHz • Pattern output	• Various amps • Transducers • Sensors • Industrial meters

Abundant modules

Hioki has added new high-performance modules in response to overwhelming demand.


The Memory HiCorder now supports a wide variety of measurements.



Output and record results seamlessly


Just one MEMORY HICORDER gives you a function generator mode, arbitrary waveform generator mode, and waveform measurement mode.

This makes it easy to observe waveforms while varying test conditions, such as changing the signal's amplitude and frequency and programming various waveforms to output in order.

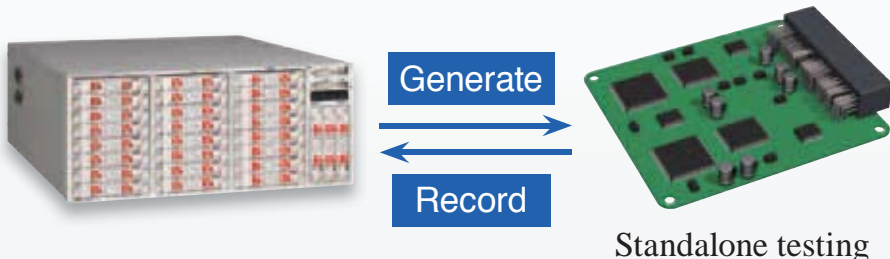


Output recorded waveforms without modification

For example, you could output actual waveforms recorded from a car without modification, and then use them for standalone testing. You can also generate isolated output of up to 15 V without a generator or amplifier, which is traditionally necessary in order to generate output while varying the signal's amplitude and frequency.

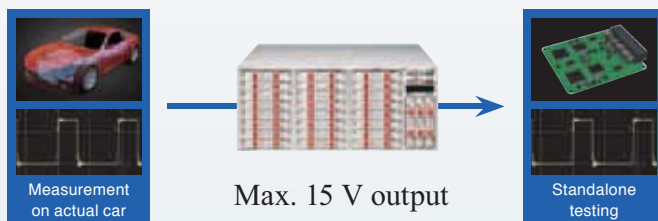


Process actual waveforms for reproducibility testing

Process and calculate signals recorded with the MEMORY HICORDER and output the arbitrary waveforms that you create.

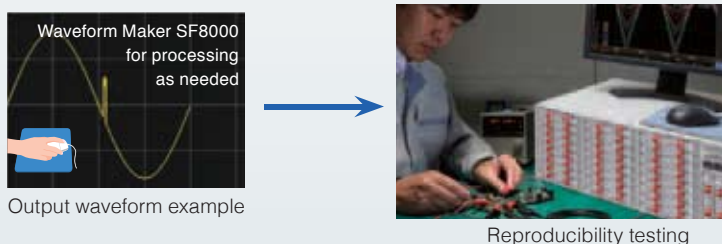


Waveform Maker Software included

After you install the included SF8000 Waveform Maker software on your computer, you can create waveforms easily by either entering them directly or by entering the functions behind them. You can also quickly add noise and multiply waveforms.

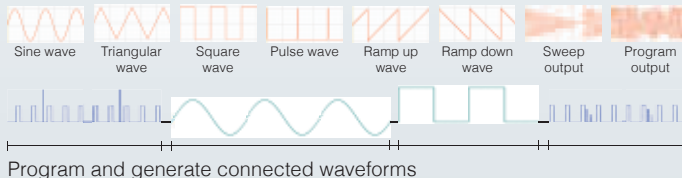

1000 V DC, 700 V AC high-voltage direct input

Since you can directly input up to 1000 V DC and 700 V AC, a differential probe is no longer necessary. Maximum rated voltage to ground is 1000 V for CAT III and 600 V for CAT IV environments.

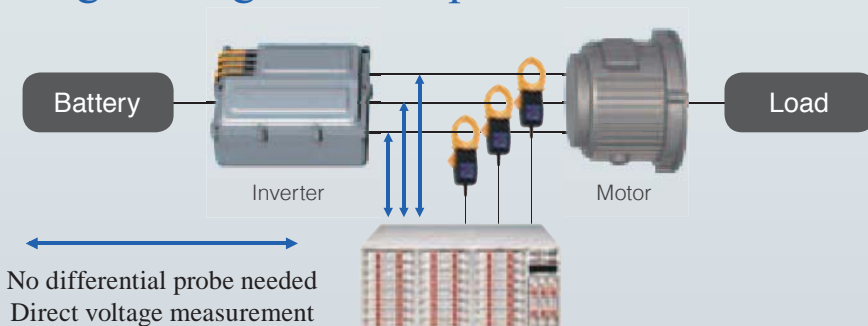

Temperature	Voltage	Distortion	Frequency, RPM	Current	Voltage	Contact
TEMP UNIT 8967	HIGH RESOLUTION UNIT 8968	STRAIN UNIT U8969	FREQ UNIT 8970	CURRENT UNIT 8971	DC/RMS UNIT 8972	LOGIC UNIT 8973
Measurement resolution: 16-bit 1/1000 of measurement range	Measurement resolution: 16-bit 1/1600 of measurement range	Measurement resolution: 16-bit 1/1250 of measurement range	Measurement resolution: 16-bit 1/2000 of measurement range	Measurement resolution: 12-bit Clamp sensor direct connection	Measurement resolution: 12-bit RMS measurement	No. of channels: 16 Observation of control signal
• Thermocouple K, J, E, T, N, R, S, B, W	• Supply voltage • Primary / secondary inverter voltage • Motor voltage, etc.	• Strain gauge converter • Dynamic strain * Vibration • Pressure * Acceleration • Weight, etc.	• Encoder • Rotating pulse	• Supply current • Inverter current • Motor current, etc.	• Supply voltage • Primary / secondary inverter voltage • Motor voltage, etc.	• Voltage / non-voltage contacts • Relay signals • AC / DC signals

Optional Specifications (sold separately)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



ANALOG UNIT 8966 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5 k/50 k/500 kHz
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	20 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% of full scale (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 5 MHz -3 dB, (with AC coupling: 7 Hz to 5 MHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 204.5 mm (8.05 in) D, approx. 240 g (8.5 oz)
Accessories: Ferrite clamp × 2



TEMP UNIT 8967 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for temperature measurement with thermocouple (voltage measurement not available)
Input terminals	Thermocouple input: plug-in connector, Recommended wire diameter: single-wire, 0.14 to 1.5 mm ² , braided wire 0.14 to 1.0 mm ² (conductor wire diameter min. 0.18 mm), AWG 26 to 16 Input impedance: min. 5 MΩ (with line fault detection ON/OFF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Temperature measurement range	10°C (50°F)/div (-100°C to 200°C (-148°F to 392°F)), 50°C (122°F)/div (-200°C to 1000°C (-328°F to 1832°F)), 100°C (212°F)/div (-200°C to 2000°C (-328°F to 3632°F)), 3 ranges, full scale: 20 div, Measurement resolution: 1/1000 of measurement range (using 16-bit A/D conversion)
Thermocouple range (JIS C 1602-1995) (ASTM E-988-96)	K: -200°C to 1350°C (-328°F to 2462°F), J: -200°C to 1100°C (-328°F to 2012°F), E: -200°C to 800°C (-328°F to 1472°F), T: -200°C to 400°C (-328°F to 752°F), N: -200°C to 1300°C (-328°F to 2372°F), R: 0°C to 1700°C (32°F to 3092°F), S: 0°C to 1700°C (32°F to 3092°F), B: 400°C to 1800°C (752°F to 3272°F), W (WR5-26): 0°C to 2000°C (32°F to 3632°F), Reference junction compensation: internal/ external (switchable), Line fault detection ON/OFF possible
Data refresh rate	3 methods, Fast: 1.2 ms (digital filter OFF), Normal: 100 ms (digital filter 50/60 Hz), Slow: 500 ms (digital filter 10 Hz)
Measurement accuracy	Thermocouple K, J, E, T, N: ±0.1% of full scale ±1°C (±1.8°F) (±0.1% of full scale ±2°C (±3.6°F) at -200°C to 0°C (-328°F to 32°F)), Thermocouple R, S, B, W: ±0.1% of full scale ±3.5°C (±6.3°F) (at 0°C (32°F) to less than 400°C (752°F)); However, no accuracy guarantee of less than 400°C (752°F) for B, ±0.1% f.s. ±3°C (±5.4°F) (at 400°C (752°F) or more) Reference junction compensation accuracy: ±1.5°C (±2.7°F) (added to measurement accuracy with internal reference junction compensation)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



HIGH RESOLUTION UNIT 8968 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5k/50k Hz
Anti-aliasing filter	Integrated filter for suppressing aliasing distortion caused by FFT processing (automatic cutoff frequency setting/OFF)
Measurement resolution	1/1600 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.3% of full scale (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 100 kHz -3 dB (with AC coupling: 7 Hz to 100 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 245 g (8.6 oz)
Accessories: Conversion cable L9769 × 2 (cable length 60 cm/1.97 ft)



STRAIN UNIT U8969 (Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less, after 30 minutes of warm-up time and auto-balance; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for distortion measurement (electronic auto-balancing, balance adjustment range within ±10 000 με or less)
Input terminals	NDIS connector EPRC07-R9FNDIS (via Conversion Cable L9769, NDIS connector PRC03-12A10-7M10.5) Max. rated voltage to ground: 30 V rms or 60 V DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Suitable transducer	Strain gauge converter, Bridge impedance: 120 Ω to 1 kΩ, Bridge voltage: 2 V ±0.05 V, Gauge rate: 2.0
Measurement range	20 με to 1000 με/div, 6 ranges, full scale: 20 div, Low-pass filter: 5/10/100 Hz, 1 kHz
Measurement resolution	1/1250 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	200 kS/s (simultaneous sampling across 2 channels)
Measurement accuracy After auto-balancing	±0.5% f.s. ±4 με (5 Hz filter ON)
Frequency characteristics	DC to 20 kHz +1/-3 dB

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



FREQ UNIT 8970 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage input based frequency measurement, rotation, power frequency, integration, pulse duty ratio, pulse width
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Frequency mode	Range: Between DC to 100 kHz (minimum pulse width 2 μs), 1 Hz/div to 5 kHz/div (full scale = 20 div), 8 settings Accuracy: ±0.1% f.s. (excluding 5 kHz/div), ±0.7% f.s. (at 5 kHz/div)
Rotation mode	Range: Between 0 to 2 million rotations/minute (minimum pulse width 2 μs), 100 (r/min)/div to 100 k (r/min)/div (full scale = 20 div), 7 settings Accuracy: ±0.1% f.s. (excluding 100 k (r/min)/div), ±0.7% f.s. (at 100 k (r/min)/div)
Power frequency mode	Range: 50 Hz (40 to 60 Hz), 60 Hz (50 to 70 Hz), 400 Hz (390 to 410 Hz) (full scale = 20 div), 3 settings Accuracy: ±0.03 Hz (50, 60 Hz), ±0.1 Hz (400 Hz range)
Integration mode	Range: 2 k counts/div to 1 M counts/div, 6 settings Accuracy: ±range/2000
Duty ratio mode	Range: Between 10 Hz to 100 kHz (minimum pulse width 2 μs), 5%/div (full scale = 20 div) Accuracy: ±1% (10 Hz to 10 kHz), ±4% (10 kHz to 100 kHz)
Pulse width mode	Range: Between 2 μs to 2 sec, 500 μs/div to 100 ms/div (full scale = 20 div), Accuracy: ±0.1% f.s.
Measurement resolution	1/2000 of range (Integration mode), 1/500 of range (exclusive integration, power frequency mode), 1/100 of range (power frequency mode)
Input voltage range and threshold level	±10 V to ±400 V, 6 settings, selectable threshold level at each range
Other functions	Slope, Level, Hold, Smoothing, Low-pass filter, Switchable DC/AC input coupling, Frequency dividing, Integration over-range keep/return

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: CONVERSION CABLE 9318 × 2 (To connect the current sensor to the 8971)



CURRENT UNIT 8971 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, Current measurement with optional current sensor,
Input terminals	Sensor connector (input impedance 1 MΩ, exclusive connector for current sensor via conversion cable the 9318, common GND with recorder)
Compatible current sensors	CT6863, CT6862, 9709, CT6841, CT6843, CT6844, CT6845, 9272-10 (To connect the 8971 via conversion cable the 9318)
Measurement range	Using 9272-10 (20 A), CT6841: 100 mA to 5 A/div (f.s. = 20 div, 6 settings) Using CT6862: 200 mA to 10 A/div (f.s. = 20 div, 6 settings) Using 9272-10 (200 A), CT6843, CT6863: 1 A to 50 A/div (f.s. = 20 div, 6 settings) Using CT6844, CT6845, 9709: 2 A to 100 A/div (f.s. = 20 div, 6 settings)
Measurement accuracy (with 5 Hz filter ON)	±0.65% f.s. RMS amplitude accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 10 kHz) RMS response time: 100 ms (rise time from 0 to 90% of full scale), Crest factor: 2 Frequency characteristics: DC to 100 kHz, ±3 dB (with AC coupling: 7 Hz to 100 kHz)
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Other functions	Input coupling: AC/DC/GND, Low-pass filter: 5, 50, 500, 5 k, 50 kHz

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



DC/RMS UNIT 8972 (Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	Number of channels: 2, for voltage measurement, DC/RMS selectable
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	5 mV to 20 V/div, 12 ranges, full scale: 20 div, AC voltage for possible measurement/display using the memory function: 280 V rms, Low-pass filter: 5/50/500 Hz, 5 k/100 kHz
Measurement resolution	1/100 of range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% of full scale (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS amplitude accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz), ±3% of full scale (1 kHz to 100 kHz) Response time: SLOW 5 s (rise time from 0 to 90% of full scale), MID 800 ms (rise time from 0 to 90% of full scale), FAST 100 ms (rise time from 0 to 90% of full scale), Crest factor: 2
Frequency characteristics	DC to 400 kHz -3 dB, (with AC coupling: 7 Hz to 400 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 190 g (6.7 oz)
Accessories: None



LOGIC UNIT 8973	
Measurement functions	Number of channels: 16 channels (4 ch/1 probe connector × 4 connectors)
Input terminals	Mini DIN connector (for HIOKI logic probes only), Compatible logic probes: 9320-01, 9327, MR9321-01

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 260 g (9.2 oz)
Accessories: None



DIGITAL VOLTMETER UNIT MR8990 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and calibration, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for DC voltage measurement
Input terminals	Banana input connectors (Input resistance: 100 MΩ or higher with 100 mV f.s. to 10 V f.s. range, otherwise 10 MΩ) Max. rated voltage to ground: 300 V AC or DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Measurement range	100 mV f.s. (5 mV/div) to 1000 V f.s. (50 V/div), 5 ranges, full scale: 20 div
Measurement resolution	1/50 000 of measurement range (using 24 bit ΔΣ modulation A/D)
Integration time	20 ms ×NPLC (during 50 Hz), 16.67 ms ×NPLC (during 60 Hz)
Response time	2 ms +2× integration time or less (rise - f.s. → + f.s., fall + f.s. → - f.s.)
Basic measurement accuracy	±0.01% rdg. ±0.0025% f.s. (at range of 1000 mV f.s.)
Maximum input voltage	500 V DC (maximum voltage that can be applied between input connectors without damage)

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)
Accessories: None



HIGH-VOLTAGE UNIT U8974 <small>(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% rh after 30 minutes of warm-up time and zero adjustment, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement functions	Number of channels: 2, for voltage measurement, DC/RMS selectable Maximum rated voltage to ground: 1000 V AC or DC (CAT III), 600 V AC or DC (CAT IV)
Input terminals	Banana input terminal (Input impedance: 4 MΩ, Input capacitance: 5 pF)
Measurement range	200 mV, 500 mV, 1, 2, 5, 10, 20, 50 V/div (DC mode) 500 mV, 1, 2, 5, 10, 20, 50 V/div (RMS mode)
Measurement resolution	1/1600 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s
Measurement accuracy	±0.25% f.s. (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS accuracy: ±1.5% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 100 kHz) Response time: High speed 150 ms, Medium speed 500 ms, Low speed 2.5 s
Frequency characteristics	DC to 100 kHz -3 dB
Input coupling	DC / GND
Maximum input voltage	1000 V DC, 700 V AC

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



ARBITRARY WAVEFORM GENERATOR UNIT U8793 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less after 30 minutes or more of warm-up time, Power supply frequency range of resolved MEMORY HICORDER at 50 Hz/60 Hz ±2 Hz, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 2, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 33 V rms AC or 70 V DC
Output voltage range	-10 V to 15 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	10 mA (Allowable load resistance: 1.5 kΩ or more)
FG function	DC, Sine wave, Square wave, Pulse wave, Triangular wave, Ramp wave, Output frequency: 0 Hz to 100 kHz
Arbitrary waveform generator mode	Waveforms measured by MR8847A, etc., generated by Hioki Model 7075 or SF8000, CSV waveforms D/A refresh rate: 2 MHz (using 16-bit D/A)
Sweep function	Frequency, Amplitude, Offset, Duty (Pulse only)
Program function	Max. 128 steps (Number of loops for each step, Number of total loops)
Other	Self-test function (Voltage), External input/output control

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)
Accessories: None



WAVEFORM GENERATOR UNIT MR8790 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh after 30 minutes of warm-up time, Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 4, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 33 V rms AC or 70 V DC
Output voltage range	-10 V to 10 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	5 mA
Output function	DC, Sine wave (Output frequency range: 0 Hz to 20 kHz)
Accuracy	Amplitude accuracy: ±0.25% of setting ±2 mV p-p (1 Hz to 10 kHz) Offset accuracy: ±3 mV DC output accuracy: ±0.6 mV
Other	Self-test function (Voltage, Current)

Dimensions and mass: approx. 106 mm (4.17 in) W x 19.8 mm (0.78 in) H x 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)
Accessories: None



PULSE GENERATOR UNIT MR8791 <small>(Accuracy at 23 ±5°C/73 ±9°F, 80% rh or less with no condensation, Accuracy guaranteed for 1 year)</small>	
Output terminal	Number of channels: 8, Connector: D-sub, half-pitch, 50-pin Max. rated voltage to ground: 33 V rms AC or 70 V DC (between unit and output channels) Logic output/Open collector output
Output mode 1	Pattern output: Read frequency: 0 Hz to 120 kHz, 2048 logic patterns Pulse output: Frequency 0 Hz to 20 kHz, Duty 0.1% to 99.9%
Output mode 2	Logic output: Output voltage level: 0 V to 5 V (H level: 3.8 V or more, L level: 0.8 V or less) Open collector output: Absolute maximum rated voltage for collector/emitter: 50 V Overcurrent protection: 100 mA
Other	Self-test function

Cable length and mass: Input side: 70 cm (2.30 ft), Output side: 1.5 m (4.92 ft), Approx. 170 g (6.0 oz)



DIFFERENTIAL PROBE P9000 <small>(Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)</small>	
Measurement modes	P9000-01: For waveform monitor output, Frequency characteristics: DC to 100 kHz -3 dB P9000-02: Switches between waveform monitor output/AC effective value output Wave mode frequency characteristics: DC to 100 kHz -3 dB, RMS mode frequency characteristics: 30 Hz to 10 kHz, Response time: Rise 300 ms, Fall 600 ms
Division ratio	Switches between 1000:1, 100:1
DC output accuracy	±0.5% f.s. (f.s. = 1.0 V, division ratio 1000:1), (f.s. = 3.5 V, division ratio 100:1)
Effective value measurement accuracy	±1% f.s. (30 Hz to less than 1 kHz, sine wave), ±3% f.s. (1 kHz to 10 kHz, sine wave)
Input resistance/capacity	H-L: 10.5 MΩ, 5 pF or less (At 100 kHz)
Maximum input voltage	1000 V AC, DC
Maximum rated voltage to ground	1000 V AC, DC (CAT III)
Operating temperature range	-40°C to 80°C (-40°F to 176°F)
Power supply	(1) AC adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter), 0.9 VA (main unit only) (2) USB bus power (5 V DC, USB micro-B connector), 0.8 VA (3) External power source 2.7 V to 15 V DC, 1 VA
Accessories	Instruction manual x1, Alligator clip x2, Carrying case x1

Cable length and mass: Main unit cable 1.3 m (4.27 ft), input section cable 46 cm (1.51 ft), approx. 350 g (12.3 oz)



DIFFERENTIAL PROBE 9322 <small>(Accuracy guaranteed for 1 year)</small>	
Functions	For high-voltage floating measurement, power line surge noise detection, RMS rectified output measurement
DC mode	For waveform monitor output, Frequency characteristics: DC to 10 MHz (±3 dB), Amplitude accuracy: ±1% of full scale (at max. 1000 V DC), ±3% of full scale (at max. 2000 V DC) (full scale: 2000 V DC)
AC mode	For detection of power line surge noise, Frequency characteristics: 1 kHz to 10 MHz ±3 dB
RMS mode	DC/AC voltage RMS output detection, Frequency characteristics: DC, 40 Hz to 100 kHz, Response speed: 200 ms or less (400 V AC), Accuracy: ±1% of full scale (DC, 40 Hz to 1 kHz), ±4% of full scale (1 kHz to 100 kHz) (full scale: 1000 V AC)
Input	Input type: balanced differential input, Input impedance/capacitance: H-L 9 MΩ/10 pF, H/L-unit 4.5 MΩ/20 pF, Max. rated voltage to ground: when using grabber clip 1500 V AC/DC (CAT II), 600 V AC/DC (CAT III), when using alligator clip: 1000 V AC/DC (CAT II), 600 V AC/DC (CAT III)
Maximum input voltage	2000 V DC, 1000 V AC (CAT II), 600 V AC/DC (CAT III)
Output	Voltage divider for 1/1000 of input, BNC connectors (output switchable for 3 modes DC, AC, RMS)
Power supply	Any of the following: (1) AC Adapte 9418-15, (2) Power Cord 9248 with Probe Power Unit 9687, (3) Power Cord 9324 + Conversion Cable 9323 with HICORDER logic terminal, (4) Power Cord 9325 with F/V Unit 8940

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 30 cm (0.98 ft), approx. 150 g (5.3 oz)
Note: The unit-side plug of the 9320-01 and 9327 is different from the 9320.



LOGIC PROBE 9320-01/9327	
Functions	Detection of voltage signal or relay contact signal for High/Low state recording
Input	4 channels (common ground between unit and channels), digital/contact input, switchable (contact input can detect open-collector signals) Input resistance: 1 MΩ (with digital input, 0 to +5 V) 500 kΩ or more (with digital input, +5 to +50 V) Pull-up resistance: 2 kΩ (contact input: internally pulled up to +5 V)
Digital input threshold	1.4 V / 2.5 V / 4.0 V
Contact input detection resistance	1.4 V: 1.5 kΩ or higher (open) and 500 Ω or lower (short) 2.5 V: 3.5 kΩ or higher (open) and 1.5 kΩ or lower (short) 4.0 V: 25 kΩ or higher (open) and 8 kΩ or lower (short)
Response speed	9320-01: 500 ns or lower, 9327: detectable pulse width 100 ns or higher
Maximum input voltage	0 to +50 V DC (the maximum voltage that can be applied across input pins without damage)

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 1 m (3.28 ft), approx. 320 g (11.3 oz)
Note: The unit-side plug of the MR9321-01 is different from the MR9321.



LOGIC PROBE MR9321-01	
Functions	Detection of AC or DC relay drive signal for High/Low state recording Can also be used for power line interruption detection
Input	4 channels (isolated between unit and channels), HIGH/LOW range switching Input resistance: 100 kΩ or higher (HIGH range), 30 kΩ or higher (LOW range)
Output (H) detection	170 to 250 V AC, ±DC 70 to 250 V (HIGH range) 60 to 150 V AC, ±DC 20 to 150 V (LOW range)
Output (L) detection	0 to 30 V AC, ±DC 0 to 43 V (HIGH range) 0 to 10 V AC, ±DC 0 to 15 V (LOW range)
Response time	Rising edge 1 ms max., falling edge 3 ms max. (with HIGH range at 200 V DC, LOW range at 100 V DC)
Maximum input voltage	250 V rms (HIGH range), 150 V rms (LOW range) (the maximum voltage that can be applied across input pins without damage)

More Functional Details

Frequency area data analysis (FFT function)

Electrical distortion analysis/mechanical vibration analysis

FFT analysis function

This function comprises single-signal FFT for tasks such as frequency component analysis, dual-signal FFT for transfer function analysis, and octave analysis for acoustic measurements. The signal source for analysis are selectable from 1,000 to 10,000 data points.

Specify an analysis point

Waveform in the MEM function



HTTP/FTP server function


A 100BASE-TX LAN port is built in as standard equipment.

<HTTP server capability>

Access the unit via a web browser running on a computer, for waveform observation and remote operation. Waveform data of the MR8740/MR8741 series can also be downloaded and pasted onto Excel.

<FTP server capability>

Copy the memory contents of the MR8740/MR8741 (USB memory, internal RAM) to a computer.

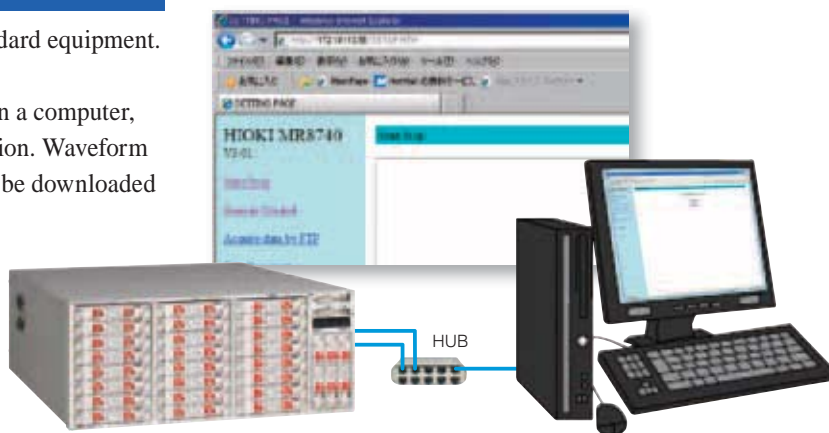

Analyzing data on a computer

● WAVE PROCESSOR 9335 (option)

- Waveform display and calculation
- Print function

● LAN COMMUNICATOR 9333 (option)

- Collect waveform data
- Remotely control Memory HiCorders with a PC
- Save data in CSV format and export to spreadsheet applications

● iPad App for Memory HiCorder HMR Terminal (option)

- Free app (exclusively for iPad) downloadable from the App Store
 - Freely control waveforms using iPad's gesture controls
 - Multi-channel support – up to 32 channels (with MR8827, MR8740) of waveform data at your fingertips
 - Operate the Memory HiCorder via network
- You can change settings, and monitor waveforms during measurement.

*New function on Ver.2.0

Data can be viewed by the iPad using Hioki's dedicated apps available from the App Store. Search for "HIOKI" and download the "HMR Terminal" app.




*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.

*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.

*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.

● Wave Viewer (Wv) Software (bundled software)

- Confirmation of binary data waveforms on a computer
- Saving data in the CSV format for transfer to spreadsheet software



■ Wave Viewer (Wv) Outline specifications (bundled software)

Operating environment	Windows 10/8/7 (32/64-bit), Vista (32-bit), XP
Functions	<ul style="list-style-type: none"> • Simple display of waveform file • Convert binary data file to text format, CSV • Scroll display, enlarge/reduce, jump to cursor/trigger position, etc.

■ 9335 Outline specifications (option)

Operating environment	Computer running under Windows 10/8/7 (32/64-bit), Vista (32-bit), XP
Functions	<ul style="list-style-type: none"> • Display: Waveform display, X-Y display, cursor function, etc. • File loading: Readable data formats (.MEM, .REC, .RMS, .POW) <p>Largest readable file: Largest file that can be saved by supported instruments (Supported file size may be limited due to computer's operating environment.)</p> <ul style="list-style-type: none"> • Data conversion: Conversion to CSV format, batch conversion of multiple files
Print	<ul style="list-style-type: none"> • Print function: Saving of print image files (with support for enhanced metafile [EMF] format) • Print format: Select from no tiling, 2 to 16 tiles, 2 to 16 rows, X/Y 1 to 4 tiles, preview/hard copy

■ 9333 Outline specifications (option)

Supported units	MR8740 (ver.3.12 or later), MR8741 (ver.2.12 or later) and similar products
Operating environment	Computer running under Windows 10/8/7 (32/64-bit), Vista (32-bit), XP <i>Note: 9333 Ver.1.09 or later</i>
Functions	<ul style="list-style-type: none"> • Auto-saves waveform data to PC, Remote control of Memory HiCorder (by sending key codes and receiving images on screen), print reports, print images from the screen, receive waveform data in same format as waveform files from the Memory HiCorder (binary only) • Waveform data acquisition: Accept auto-saves from the Memory HiCorder, same format as auto-save files of Memory HiCorder (binary only), print automatically with a Memory HiCorder from a PC. The Memory HiCorder's print key launches printouts on the PC • Waveform viewer: Simple display of waveform files, conversion to CSV format, or other

■ HMR Terminal Outline specifications (free software)

Supported units	MR8740, MR8741 and similar products *calculated waveforms and logical waveforms not supported
Operating environment	iOS on the iPad (Apple Inc.)
Functions	<ul style="list-style-type: none"> • Data acquisition: Send to iPad via FTP using a WiFi router, or load to iPad via iTunes (PC app) • Intuitively operate waveform level searches, maximum / minimum / average values, zero position adjustment, and more at your fingertips • Waveform monitoring • Meter setting <p>* Logic waveforms and computational waveforms are not supported.</p>

Specifications

Basic specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	MEMORY (high-speed recording, X-Y), RECORDER (real-time recording), FFT (frequency analysis) (Recorder functionality scheduled to be available by the end of 2012.)
Number of input units	MR8740: 27units + 16 logic channels (standard) MR8741: 8units + 16 logic channels (standard) * For analog units, channels are isolated from each other and from frame GND. For logic units and internal standard logic terminals, all channels have common GND.
Maximum sampling rate	20 MS/second (50 ns period, all channels simultaneously) External sampling (10 MS/second, 100 ns period)
Internal memory	MR8740: Block I; Total 512 M-words (16MW/ch) Block II; Total 352 M-words (16MW/ch) MR8741: Total 256 M-words (16MW/ch)
Data storage media	USB memory stick (USB 2.0)
Backup functions (At 25°C/ 77°F)	Clock and parameter setting backup: at least 10 years Waveform backup function: none
External control connectors (MR8741only)	Terminal block: External trigger input, Trigger output, External sampling input, Two external outputs (GO/NG output), Three external inputs (start, stop, save)
External interfaces	LAN: 100BASE-TX (DHCP, DNS supported, FTP server, HTTP server) USB: USB2.0 compliant, series A receptacle x2
Environmental conditions (No condensation)	Operation: 0°C (32°F) to 40°C (104°F), 20 % to 80 % rh Storage: -10°C (14°F) to 50°C (122°F), 90 % rh or less
Compliance standard	Safety: EN61010
Power supply	100 to 240 V AC, 50/60 Hz
Power consumption	MR8740: 250 VA, MR8741: 120 VA
Dimensions and mass (main unit only)	MR8740: Approx. 426 mm (16.77 in) W x 177 mm (6.97 in) H x 505 mm (19.88 in) D, 10.8 kg (381.0 oz) MR8741: Approx. 350 mm (13.78 in) W x 160 mm (6.30 in) H x 320 mm (12.60 in) D, 5.4 kg (190.5 oz)
Supplied accessories	Instruction Manual x 1, Application Disk (Wave Viewer Wv, Communication Commands table) x 1, Power cord x 1, rack-mounting hardware (EIA standard) x 1set (MR8740 only)
MEMORY (high-speed recording)	
Time axis	5 µs to 5 min/div (100 samples/div) 26 ranges, External sampling (MR8740 only), Time axis zoom: x2 to x10 in 3 stages, compression: 1/2 to 1/20,000 in 13 stages
Sampling period	1/100 of time axis range (minimum 50 ns period)
Recording length	25 to 100,000 div, or arbitrary setting in 1-div steps (max. 160,000 div)
Pre-trigger	Record data from before the trigger point at 0 to +100% or -95% of the recording length in 15 stages, or in 1 div step settings
Numerical calculation	<ul style="list-style-type: none"> Simultaneous calculation for up to 16 selected channels Average value, effective (rms) value, peak to peak value, maximum value, time to maximum value, minimum value, time to minimum value, period, frequency, rise time, fall time, standard deviation, area value, X-Y area value, specified level time, specified time level, pulse width, duty ratio, pulse count, four arithmetic operations, Time difference, phase difference, high-level and low-level Calculation result evaluation output: GO/NG Automatic storing of calculation results
Waveform processing	For up to 16 freely selectable channels, the following functions can be performed (results are automatically stored): Four arithmetic operations, absolute value, exponentiation, common logarithm, square root, moving average, differentiation (primary, secondary), integration (primary, secondary), parallel displacement along time axis, trigonometric functions, reverse trigonometric functions
Memory segmentation	Max. 1024 blocks
Other functions	<ul style="list-style-type: none"> No logging X-Y waveform synthesis (1-screen, 4-screens) Overlay (always overlay when started/overlay only required waveforms)
RECORDER (real-time recording)	
Time axis	10 ms to 1 hour/div, 19 ranges, time axis resolution 100 points/div Note: Out of data acquired at selected sampling rate, only maximum and minimum value data determined using 100 points/div units are stored. Time axis compression selectable in 13 steps, from x 1/2 to x 1/20,000
Sampling rate	1/10/100 µs 1/10/100 ms (selectable from 1/100 or less of time axis)
Recording length	Built-in presets of 25 - 50,000 div, or "Continuous" or arbitrary setting in 1-div steps (max. 80,000 div)
Waveform memory	Store data for most recent 80,000 div in memory
Auto save	Data is automatically saved in USB memory stick after measurement stops

Trigger functions	
Trigger mode	MEMORY (high-speed recording), FFT: Single, Repeat, Auto RECORDER* (real-time recording): Single, Repeat
Trigger sources	CH1 to CH16 (analog), Standard Logic 16ch + Logic Unit (Max. 3 units 48 channels), External, Timer, Manual (either ON or OFF for each source), Logical AND/OR of sources
Trigger types	<ul style="list-style-type: none"> Level: Triggering occurs when preset voltage level is crossed (upwards or downwards) Voltage drop: Triggering occurs when voltage drops below peak voltage setting (for 50/60 Hz AC power lines only) Window: Triggering occurs when window defined by upper and lower limit is entered or exited Period: Rising edge or falling edge cycle of preset voltage value is monitored and triggering occurs when defined cycle range is exceeded Glitch: Triggering occurs when pulse width from rising or falling edge of preset voltage value is under run Event setting: Event count is performed for each source, and triggering occurs when a preset count is exceeded Logic: 1, 0, or x. Pattern setting
Level setting resolution	0.1% of full scale (full scale = 20 divisions)
Trigger filter	Selectable 0.1div to 10.0div, or OFF (at MEMORY function) ON (10ms fixed) or OFF (at RECORDER function*)
Trigger output (MR8741 only)	Open collector (5 voltage output, active Low) At Level setting: pulse width (Sampling period x data number after trigger) At Pulse setting: pulse width (2ms)
Other functions	Trigger priority (OFF/ON), Pre-trigger function for capturing data from before / after trigger event (at MEMORY function), Level display during trigger standby, Start and stop trigger (At RECORDER function*), Trigger search function

FFT	
Analysis mode	Storage waveform, Linear spectrum, RMS spectrum, Power spectrum, Density of power spectrum, Cross power spectrum, Auto-correlation function, Histogram, Transfer function, Crosscorrelation function, Impulse response, Coherence function, 1/1 Octave analysis, 1/3 Octave analysis, LPC analysis, Phase spectrum
Analysis channels	Selectable from all analog input channels
Frequency range	133 mHz to 8 MHz, External, (resolution 1/400, 1/800, 1/2000, 1/4000)
Number of sampling points	1000, 2000, 5000, 10000 points
Window functions	Rectangular, Hanning, Hamming, Blackman, Blackman-Harris, Flattop, Exponential
Display format	Single, Dual, Nyquist, Running spectrum
Averaging function	Time axis / frequency axis simple averaging, Exponential averaging, Peak hold (frequency axis), Averaging times: 2 times to 10,000 times

Other functions	
Waveform judgment function (In MEMORY or FFT function) (MR8741 only)	<ul style="list-style-type: none"> Area comparison with reference waveform area for time domain waveform, X-Y waveform, or FFT analysis waveform Parameter calculated value comparison with reference value Output: GO/NG decision, Open-collector 5V, <p>Note: Judge waveforms in near real-time at samplings speeds of 100msec/div (1ms sampling) or slower.</p>

Maximum Recording Time for the internal memory (At MEMORY Function)

Time axis	5 µs/div	10 µs/div	20 µs/div	50 µs/div	100 µs/div	200 µs/div	500 µs/div	1 ms/div	2 ms/div	5 ms/div	10 ms/div	20 ms/div	50 ms/div
Sampling period	50 ns	100 ns	200 ns	500 ns	1 µs	2 µs	5 µs	10 µs	20 µs	50 µs	100 µs	200 µs	500 µs
Recording Time	0.8 s	1.6 s	3.2 s	8 s	16 s	32 s	1 min 20 s	2 min 40 s	5 min 20 s	13 min 20 s	26 min 40 s	53 min 20 s	2 h 13 min 20 s
Time axis	100 ms/div	200ms/div	500ms/div	1s/div	2s/div	5s/div	10s/div	30s/div	50s/div	1 min/div	100s/div	2min/div	5min/div
Sampling period	1 ms	2ms	5ms	10ms	20ms	50ms	100ms	300ms	500ms	600ms	1.0s	1.2s	3.0s
Recording Time	4 h 26 min 40 s	8 h 53 min 20 s	22 h 13 min 20 s	1 d 20 h 26 min 40 s	3 d 16 h 53 min 20 s	9 d 06 h 13 min 20 s	18 d 12 h 06 min 40 s	55 d 13 h 20 min 00 s	92 d 14 h 13 min 20 s	111 d 02 h 40 min 00 s	185 d 04 h 26 min 40 s	222 d 05 h 20 min 00 s	555 d 13 h 20 min 00 s

MR8741, MR8740 Options in Detail

*Input cords are not included. Please purchase them separately.
 *The 8971 use up to 4 with MR8740; not compatible with MR8741. When using the 9709 or the CT6865 with Current Unit 8971, a total of 7 current probes can be used.

Input modules

- ANALOG UNIT 8966**
2 ch, Voltage input, DC to 5 MHz bandwidth
- TEMP UNIT 8967**
2 ch, thermocouple temperature input
- HIGH RESOLUTION UNIT 8968**
2 ch, voltage input, DC to 100 kHz bandwidth
- STRAIN UNIT U8969**
2 ch, strain gauge type converter amp
- FREQ UNIT 8970**
2 ch, for measurement of frequency, rpm, pulse, etc.
- CURRENT UNIT 8971**
2 ch, for measuring current using dedicated current sensors, bundled 2 Conversion cable 9318
* The Current unit 8971 up to four module
- DC/RMS UNIT 8972**
2 ch, voltage/DC to 400 kHz, RMS rectifier, DC and 30 to 100 kHz bandwidth
- LOGIC UNIT 8973**
4 terminals, 16 ch
- DIGITAL VOLTMETER UNIT MR8990**
2 ch, high-precision DC V input, 0.1 μV resolution, high-speed sampling 500 times/s
- HIGH VOLTAGE UNIT U8974**
2ch, voltage input, max. 1000 V DC and 700 V AC

Output modules

- WAVEFORM GENERATOR UNIT MR8790**
4 ch, DC output ±10 V, Sign waveform output 10 mHz to 20 kHz
- PULSE GENERATOR UNIT MR8791**
8 ch, Pulse output 0.1 Hz to 20 kHz, Pattern output
- ARBITRARY WAVEFORM GENERATOR UNIT U8793**
2 ch, FG function 10 mHz to 100 kHz, Arbitrary waveform generator D/A refresh rate 2 MHz, Output 15 V

* Please contact your local HIOKI distributor for connectors that support Model MR8791.

- Output cable
- CONNECTION CABLE L9795-01**
Max. rated voltage to earth 33 Vrms or 70 VDC, SMB to alligator clip, 1.5 m (4.92 ft) length
 - CONNECTION CABLE L9795-02**
Max. rated voltage to earth 33 Vrms or 70 VDC, SMB to BNC terminal, 1.5 m (4.92 ft) length

*Voltage is limited to the specifications of the input modules in use

- Input cable (A)
- ALLIGATOR CLIP L9790-01**
Red/black set attaches to the ends of the cables L9790
 - CONTACT PIN 9790-03**
Red/black set attaches to the ends of the cables L9790
 - GRABBER CLIP 9790-02**
Red/black set attaches to the ends of the cables L9790
* When this clip is attached to the end of the L9790, input is limited to CAT III 300 V, Red/black set.
 - CONNECTION CORD L9790**
Flexible φ 4.1 mm (0.16 in) thin dia., cable allowing for up to 600 V input, 1.8 m (5.91 ft) length
* The end clip is sold separately.

*Voltage is limited to the specifications of the input modules in use

- Input cable (B)
- CONNECTION CORD L9198**
φ 5.0 mm (0.20 in) dia., cable allowing for up to 300 V input, 1.7 m (5.58 ft) length, small alligator clip
 - CONNECTION CORD L9197**
φ 5.0 mm (0.20 in) dia., cable allowing for up to 600 V input, 1.8 m (5.91 ft) length, a detachable large alligator clips are bundled
 - GRABBER CLIP 9243**
Attaches to the tip of the banana plug cable, CAT III 1000 V, 196 mm (7.72 in) length

* This probe does not expand the maximum rated voltage above ground of an isolated input.

- Input cord (C)
- 10:1 PROBE 9665**
Note: This probe does not expand the maximum rated voltage above ground of an isolated input. Max. rated voltage to earth is same as for input module, max. input voltage 1 kV rms (up to 500 kHz), 1.5 m (4.92 ft) length
 - 100:1 PROBE 9666**
Note: This probe does not expand the maximum rated voltage above ground of an isolated input. Max. rated voltage to earth is same as for input module, max. input voltage 5 kV peak (up to 1 MHz), 1.5 m (4.92 ft) length

* Voltage to ground is within this product's specifications, separate power source is also required.

- Input cord (D)
- DIFFERENTIAL PROBE P9000-01**
Waveform only, up to 1 kV AC/DC, band width up to 100kHz
 - DIFFERENTIAL PROBE P9000-02**
Waveform/RMS value switchable, up to 1 kV AC/DC, band width up to 100kHz
 - AC ADAPTER Z1008**
100 to 240 V AC



*Voltage to ground is within this product's specifications. Separate power source is also required.

- Input cable (E)
- DIFFERENTIAL PROBE 9322**
For up to 1kV AC or 2kV DC, frequency band width up to 10MHz
 - AC ADAPTER 9418-15**
100 to 240 V AC.

* Voltage input via banana terminals limited by the voltage specifications of the respective input unit.

- Input cable (F)
- CONNECTION CABLE L4940**
Banana plug - banana plug, 1.5 m (4.92 ft) length, red/black each 1
 - EXTENSION CABLE L4931**
Expands the length of the cable with banana plug, 1.5 m (4.92 ft) length
 - ALLIGATOR CLIP L4935**
Attaches to the tip of the banana plug cable, CAT IV 600V, CAT III 1000V
 - BUS BAR CLIP L4936**
Attaches to the tip of the banana plug cable, CAT III 600V
 - MAGNETIC ADAPTER L4937**
Attaches to the tip of the banana plug cable, CAT III 1000V
 - GRABBER CLIP 9243**
Attaches to the tip of the connection cable, 196 mm (7.72 in) length, CAT III 1000 V

* For the MR8990 *Voltage is limited to the specifications of the input modules in use

- Input cable (G)
- TEST LEAD L2200**
70 cm (2.30ft) length, detachable large alligator clips or needle tips are bundled, CAT IV 600V, CAT III 1000V

- Other options for input
- CONNECTION CORD L9217**
Cord has insulated BNC connectors at both ends, for signal output, 1.6 m (5.25 ft) length
 - CONVERSION ADAPTER 9199**
Receiving side banana, output BNC terminal
 - CONNECTION CORD 9165**
Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft) length
 - CONVERSION CABLE 9318**
To connect the CT6841-6846, CT6865/63, 9277/78/79, 9270/71/72 to the 8971-40/51, 38 cm (14.96 in) length

*For reference only. Please purchase locally.

- Temperature sensor
- Thermocouple**

* Only the small terminal types can be used. * The 9323 is not required for the small-terminal types 9327, 9320-01, 9321-01 and MR9321-01.

- Logic signal measurement
- LOGIC PROBE 9327**
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 100 ns or more, miniature terminal type)
 - LOGIC PROBE MR9321-01**
4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)
 - LOGIC PROBE 9320-01**
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)
 - CONVERSION CABLE 9323**
*Used for connecting the 9320/9321/MR9321 and the 9324 to the Memory HiCorder with small logic terminal models

- PC Software
- WAVE PROCESSOR 9335**
Convert data, print and display waveforms
 - LAN COMMUNICATOR 9333**
• Waveform data collect function
• Remote control with the PC

- iPad App for MEMORY HiCORDER HMR Terminal**
Download from the App Store Free (exclusively for Apple Inc. iPad)

- LAN CABLE 9642**
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft) length

Custom cable *For P9000. Inquire with your Hioki distributor.
 (1) Bus powered USB cable, (2) USB(A)- Micro B cable, (3) 3-prong cable

Model : MEMORY HiCORDER MR874x

Model No. (Order Code) (Note)

- MR8740** (Max. 54ch, 864MW memory, main unit only)
- MR8741** (Max. 16ch, 256MW memory, main unit only)

Main unit MR8740/MR8741 cannot operate alone. The 8971 use up to 4 with MR8740; not compatible with MR8741.

*A separate power supply (CT9355) is required in order to use a high-precision current sensor.
 *Only sensors with ME15W (12-pin) terminals (-05 type) can be connected to the CT9355.
 *The separately available Conversion Cable CT9900 is required in order to use a sensor with PL23 (10-pin) terminal.

- POWER SUPPLY for Current Sensors
- SENSOR UNIT CT9355** 1ch, with Waveform output
 - CONNECTION CORD L9217**
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length

- PL23 (10-pin) - ME15W (12-pin) conversion
- CONVERSION CABLE CT9900**
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

- Up to 1000 A (High precision) *ME15W (12-pin) terminal type
- High-precision pull-through type, monitor the waveforms of DC to distorted AC current
 - AC/DC CURRENT SENSOR 9709-05**, 100 kHz band width, 500A
 - Monitor the waveforms of DC to distorted AC current
 - AC/DC CURRENT PROBE CT6844-05**, 200 kHz band width, 500A
 - AC/DC CURRENT PROBE CT6845-05**, 100 kHz band width, 500A
 - AC/DC CURRENT PROBE CT6846-05**, 200 kHz band width, 1000A

*The separately available Conversion Cable CT9901 is required in order to use a high-precision current sensor equipped with a ME15W (12-pin) terminal (-05 type) with the Current Measuring Module 8971 (which is designed for use with the MR8847, MR8827, and MR8740).
 *While the CT9355 is not required in order to use a sensor equipped with a PL23 (10-pin) terminal with the 8971 or 8940, the Conversion Cable 9318 (which comes with the 8971) is required for that setup.

- Direct connectable with the Current Sensor
- CURRENT UNIT 8971** For the MR8847, MR8827, MR8740
 - CONVERSION CABLE 9318** For the CT6841/43 or other

- ME15W (12-pin) - PL23 (10-pin) conversion
- CONVERSION CABLE CT9901**
Convert ME15W (12-pin) terminal to PL23 (10-pin) terminal

Precautions when connecting a high-precision current sensor to a Memory HiCorder
Connecting to the MR8847A / MR8827 / MR8740
 • High-precision current sensor (ME15W) + CT9901 + 9318 + CURRENT UNIT 8971
 • High-precision current sensor (ME15W) + CT9355 + BNC cable → except CURRENT UNIT 8971
 • High-precision current sensor (PL23) + 9318 → CURRENT UNIT 8971
 • High-precision current sensor (PL23) + CT9900 + CT9355 + BNC cable → except CURRENT UNIT 8971

Connecting to the MR8741
 • High-precision current sensor (ME15W) + CT9355 + BNC cable → except CURRENT UNIT 8971
 • High-precision current sensor (PL23) + CT9900 + CT9355 + BNC cable → except CURRENT UNIT 8971
 Note: CURRENT UNIT 8971 is not compatible with the MR8741

Other current sensor types

The Memory HiCorder can be used with various types of current sensors and probes. For details, see product information on Hioki's website.

The CM7290 (available separately) is required in order to use these current sensors

- 100 A to 2000 A (Medium speed)
- AC/DC CURRENT SENSOR CT7631**, (Auto zero CT7731)
DC, 1 Hz to 10 kHz (-3dB), 100 A, 1 mV/A output
 - AC/DC CURRENT SENSOR CT7636**, (Auto zero CT7736)
DC, 1 Hz to 10 kHz (-3dB), 600 A, 1 mV/A output
 - AC/DC CURRENT SENSOR CT7642**, (Auto zero CT7742)
DC, 1 Hz to 10 kHz (5 kHz), 2000 A, 1 mV/A output
 - DISPLAY UNIT CM7290**
Provides measurement, display, and output functionality when used with the CT7000s.
 - DISPLAY UNIT CM7291**
with built-in Bluetooth® wireless technology
 - OUTPUT CORD L9095**
Connect to BNC terminal, 1.5 m (4.92 ft) length

- Non-contact Voltage measuring
- NON-CONTACT AC VOLTAGE PROBE SP3000-01**
5 Vrms rated, 10 Hz to 100 kHz band width
 - NON-CONTACT AC VOLTAGE PROBE SP3000**
Sold individually
 - AC VOLTAGE PROBE SP9001**
Sold individually



Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

MEMORY HiCORDER MR6000

NEW


Exceed All Limits

Fast and powerful - the best specs in the history of Memory HiCorders



Measurement

Blazing fast, never-fail sampling
High-speed isolation measurement at 200 MS/s

Storage

Superior processing capacity lets you save data while measuring
Save data in real time, 32 times faster than conventional models

Usability

User-friendly design for accurate and smooth operation
Intuitive operation via large 12.1-inch touch screen

Overwhelming high speed technology A revolutionary approach to measurement, recording and analysis

MEMORY HiCORDER MR6000

The MR6000 overcomes all barriers to reach new ground and meet challenges that are yet to be seen.

World class specifications, operability and design - Hioki's newest memory recorder has been re-engineered from top to bottom, delivering unprecedented performance that will change how you look at waveform recording.

Redefining the world standard for recorders - that is the Hioki MR6000.

200MS/s

*High-speed
optical isolated
measurement*

Instant saving

Real-time save

Intuitive operation

Touch screen



Increased efficiency of inverters and improved performance of energy-saving technologies have been achieved in the power electronics, renewable energy, and automotive industries.

We have drastically improved the technology used in our Memory HiCorders, developing the MR6000 Memory HiCorder to meet the advanced demands of all industries.





Series-Leading Measurement Performance

High-speed isolated measurement at 200 MS/s

Up to 32 ch in the analog unit and up to 128 ch in the logic unit

The Hioki Memory HiCorder lineup now includes a powerful input unit that unlocks the full measuring potential of the MR6000. The HIGH SPEED ANALOG UNIT U8976 boasts the highest sampling rate in its entire series, an order of magnitude faster than conventional models, enabling the unit to perform isolated measurement at 200 MS/s. Combine multiple modules of the 4ch ANALOG UNIT U8975, which provides 4 channels of input with a speed of 5 MS/s at 16 bits, to perform multi-channel measurements up to 32 channels. Make the most of the Memory HiCorder's capabilities as we continue its development to meet your advanced measurement needs.



Blazing fast, never-fail sampling Record high-precision waveforms




NEW HIGH SPEED ANALOG UNIT U8976

You need accurate detection of switching waveforms in inverter evaluation tests, which requires a high level of efficiency. We developed the HIGH SPEED ANALOG UNIT U8976 to meet those needs. In addition to high-speed sampling at 200 MS/s, the unit supports frequency bands up to 30 MHz. Adapted to the Memory HiCorder's direct input feature, it supports inputs up to 400 V DC.


Available recording duration **5-second continuous recording at 200 MS/s**

Sampling rate	1 ch	2 ch	3 to 4 ch	5 to 8 ch	9 to 16 ch
200 MS/s	5 s	2.5 s	1 s	0.5 s	0.25 s
100 MS/s	10 s	5 s	2 s	1 s	0.5 s
50 MS/s	20 s	10 s	4 s	2 s	1 s
20 MS/s	50 s	25 s	10 s	5 s	2.5 s
⋮	⋮	⋮	⋮	⋮	⋮

*Internal memory used *U8976 installed in 8 slots

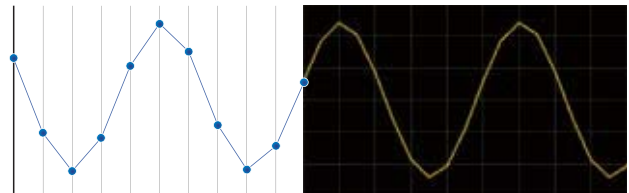

Conventional sampling (20 MS/s)

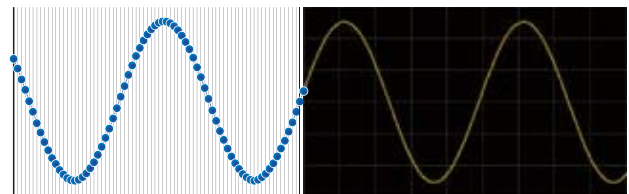

200 MS/s High-speed sampling



Isolated input with optical isolation devices


Connections between analog input channels, and between the input channel and the main unit, are fully isolated. This means that, unlike an oscilloscope, measurements can be made without concern with negative effects from potential differences.

Install up to 8 units with 4 channels each Measure multiple points simultaneously



NEW 4ch ANALOG UNIT U8975

Our lineup now includes a 4ch Analog Unit with 4-channel input on a single unit, improving the multi-channel measurement performance of the Memory HiCorder. The unit supports direct inputs up to 200 V DC, and its sampling rate is five times faster than conventional models. In addition, its high 16-bit resolution allows you to measure voltage with superior accuracy.

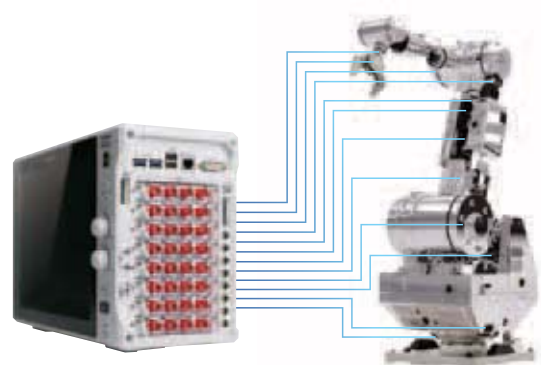

Simultaneous measurement of multiple locations in 32 channels at 5 MS/s



A rich unit lineup for detecting a wide range of phenomena

Combine multiple units to record a range of phenomena.

A high-voltage unit with a direct input of 1000 V DC is ideal for measuring global power lines, including uninterruptible power supplies (UPS) and commercial power supplies.

Use multiple logic units to measure relay ON/OFF signals or PLC (programmable logic controller) signals across up to 128 channels simultaneously.

Unit interchangeability

The unit types compatible with the MR6000 are identical to the ones compatible with the MEMORY HiCORDER MR8827, MR8847A, MR8740, and MR8741. Use any of the 12 types listed in the unit selection guide below. However, the U8975 and U8976 can only be used with the MR6000.

Unit selection guide (All 12 types)

Measured signal	Model	Description	No. of channels	Fastest sampling	Bandwidth	A/D resolution	DC accuracy	Max. input voltage	Sensitivity (#1)	Max. sensitivity range	Isolation	Supplement
Voltage (high speed)	U8976	High-Speed Analog Unit	2ch	200MS/s	DC to 30MHz	12bit	±0.5%f.s.	400V DC / 1000V DC (#2)	0.0625mV	100mVf.s.	Yes	n/a
Voltage	8966	Analog Unit	2ch	20MS/s	DC to 5MHz	12bit	±0.5%f.s.	400V DC	0.05mV	100mVf.s.	Yes	n/a
Voltage (4ch)	U8975	4ch Analog Unit	4ch	5MS/s	DC to 2MHz	16bit	±0.1%f.s.	200V DC	0.125mV	4Vf.s.	Yes	n/a
Voltage (high resolution)	8968	High Resolution Unit	2ch	1MS/s	DC to 100kHz	16bit	±0.3%f.s.	400V DC	3.125µV	100mVf.s.	Yes	with AAF
Voltage (DC, RMS)	8972	DC/RMS Unit	2ch	1MS/s	DC to 400kHz	12bit	±0.5%f.s.	400V DC	0.05mV	100mVf.s.	Yes	with RMS
Voltage (high voltage)	U8974	High Voltage Unit	2ch	1MS/s	DC to 100kHz	16bit	±0.25%f.s.	1000V DC / 700V AC	0.125mV	4Vf.s.	Yes	CAT IV 600V
Voltage (high resolution)	MR8990	Digital Voltmeter Unit	2ch	2ms	n/a	24bit	±0.01%rdg. ±0.0025%f.s.	500V DC	0.1µV	100mVf.s.	Yes	CAT II 300V
Current	8971	Current Unit	2ch	1MS/s	DC to 100kHz	12bit	±0.65%f.s.	Current sensor only	Depends on current sensor	n/a	n/a	with RMS Max. 4 Units
Temperature	8967	Temperature Unit	2ch	1.2ms	DC	16bit	Detailed reference	Thermocouples only	0.01°C	200°Cf.s.	Yes	n/a
Strain	U8969	Strain Unit	2ch	200kS/s	DC to 20kHz	16bit	±0.5%f.s. ±4µε	Strain only	0.016µε	400µεf.s.	Yes	n/a
Frequency	8970	Frequency Unit	2ch	200kS/s	DC to 100kHz (#3)	16bit	n/a	400V DC	0.002Hz	Depending mode	Yes	n/a
Logic	8973	Logic Unit	4 probes (16ch)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	Requires 9320-01,9327 or MR9320-01

(#1) Minimum resolution shows the highest sensitivity resolution (#2) When using the 9665 (#3) Min. pulse width 2µs

Concentration of sensing technologies with superior accuracy: A rich set of functions suitable for all measuring purposes


The sensing technology that serves as the inlet for measurement data is essential for detecting various phenomena in multiple channels. The MR6000 is a high-spec model that fully utilizes the capacity of Hioki's high-precision sensors.



Compatible with high-precision sensors for measuring large currents

Combine the CURRENT UNIT 8971 and a current probe or current sensor designed and manufactured by Hioki to use the system within a wide temperature range or measure large currents with a high level of precision at solar power plants or development sites for EVs/HEVs. The convenient, built-in sensor identification function lets you simply connect the sensor to easily configure the scaling settings through automatic recognition.


Combine the HIGH SPEED ANALOG UNIT U8976 and a Hioki current probe or clamp-on probe for high-precision wideband observation of current waveforms. Furthermore, install the optional PROBE POWER UNIT Z5021 to drive these probes from the MR6000 main unit.

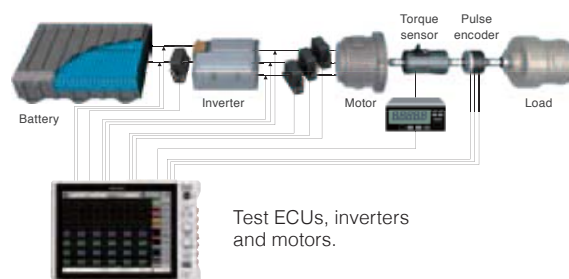

Triggers that detect targeted events

Set triggers on any channel to record data whenever an event occurs.

Level trigger	Compares to one voltage value.
Window trigger	Compares to two voltage values.
Voltage drop trigger	Detects voltage drops in commercial power lines.
Period trigger	Monitors periods.
Glitch trigger	Detects anomalies in pulses.
Pattern trigger	Compares when the logic signal is ON/OFF.

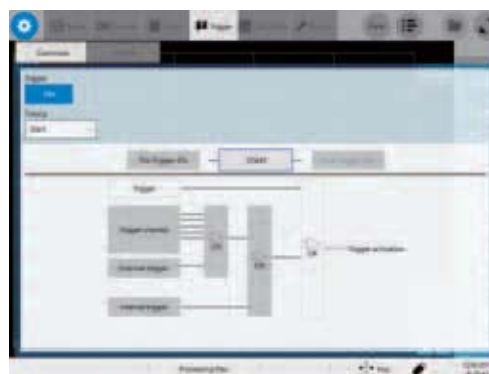


Clear trigger system diagram

Setting multiple triggers for a single channel

Set up to 4 triggers for a single channel.

If, for instance, you set the glitch, level, window-in, and window-out triggers for the same input waveform, that waveform is monitored according to the set trigger conditions.

Various triggers × Up to 4 Settable for any channel

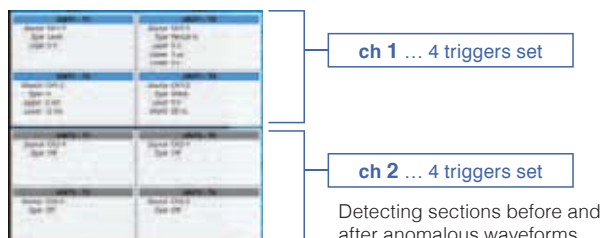

Observe long-term fluctuations without any sampling rate losses


The system uses the envelope measurement method to record maximum and minimum values at set intervals while performing oversampling at 100 MS/s.

The internal memory has a capacity of 1 G-words, which ensures that the measuring process continues for a long time without any data losses. Save data in real time while measuring.

Over sampling speed	Recording intervals	1 ch	...	9 to 16 ch
100 MS/s	10 MS/s	50 s	...	2 s
	1 MS/s	8 m 20 s	...	20 s
	100 kS/s	1 h 23 m 20 s	...	3 m 20 s
	10 kS/s	13 h 53 m 20 s	...	33 m 20 s
	1 kS/s	5 d 18 h 53 m 20 s	...	5 h 33 m 20 s

	20 S/s	289 d 8 h 26 m 40 s	...	11 d 13 h 46 m 40 s
...	

*Without the U8975, MR8990, or real-time waveform processing calculations

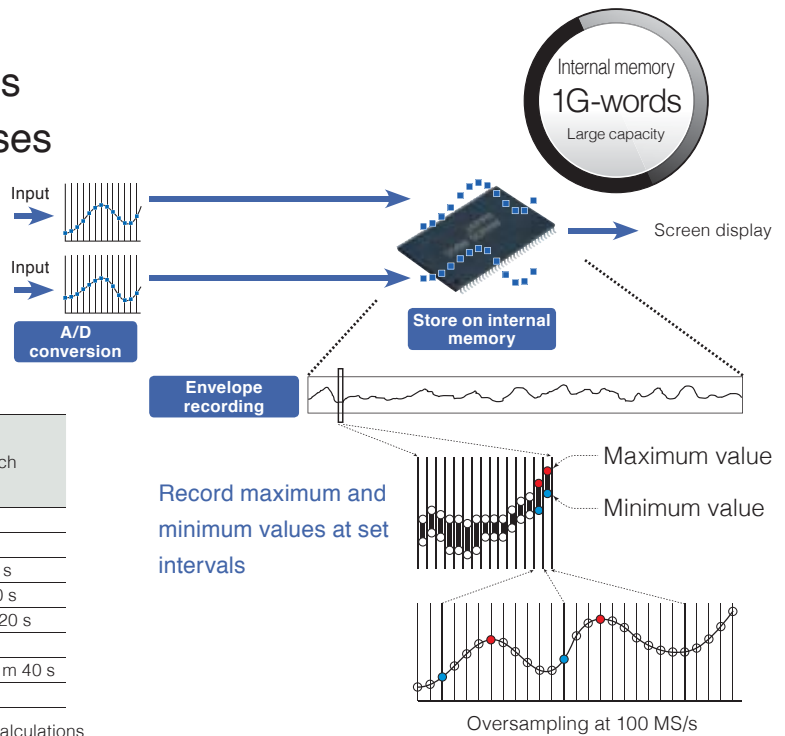

Numerical calculation function boasting high analytical performance

ALL Installed in MR6000, MR6000-01

The measured waveforms are analyzed with numerical parameters.

The MR6000 features some new numerical calculations including overshoot and undershoot calculations. In addition to analog and logic channels, this model performs calculations on real-time waveform processing channels. It also features the numerical judgment function.

ONLY Installed in MR6000-01

Calculate measurement data during measurement :
Real-time waveform processing

The MR6000-01 features powerful optional equipment for real-time waveform processing. This function performs the four arithmetic operations (addition, subtraction, multiplication, and division), differentiation calculations, or integration calculations during the measuring process. This lets you use waveforms to check the calculation results while measuring. The equipment also saves and computes the calculation results numerically after the measuring process.

ONLY Installed in MR6000-01

Observe clear waveforms without noise :
Digital filter calculation

This function removes harmonic noise or specific frequency noise from measurement data. Use it to eliminate the noise that cannot be resolved with the standard filter installed in the unit.

Simultaneous calculations of up to 16 out of a total of 33 computations


Average value	Rise time	Duty ratio	Amplitude
RMS value	Fall time	Pulse count	Overshoot
Peak to peak value	Standard deviation	Four arithmetic operations	Undershoot
Maximum value	Area value	Time difference	+Width
Time to maximum value	X-Y area value	Phase difference	-Width
Minimum value	Specified level time	High-level	Burst width
Time to minimum value	Specified time level	Low-level	Integration values
Period	Pulse width	Median value	XY waveform angle
Frequency			




Simple setting method



Optional equipment for real-time waveform processing



Digital filter disabled




Digital filter enabled

Highest Transfer Speed in the Entire Series

Data transfer up to 32 times faster compared to conventional models
 Outstanding real-time save function that saves data during measurement


The MR6000 features a brand new interface that makes data transfer up to 32 times faster.

In addition, faster internal processing allows data to be saved to external media in real time during measurement.

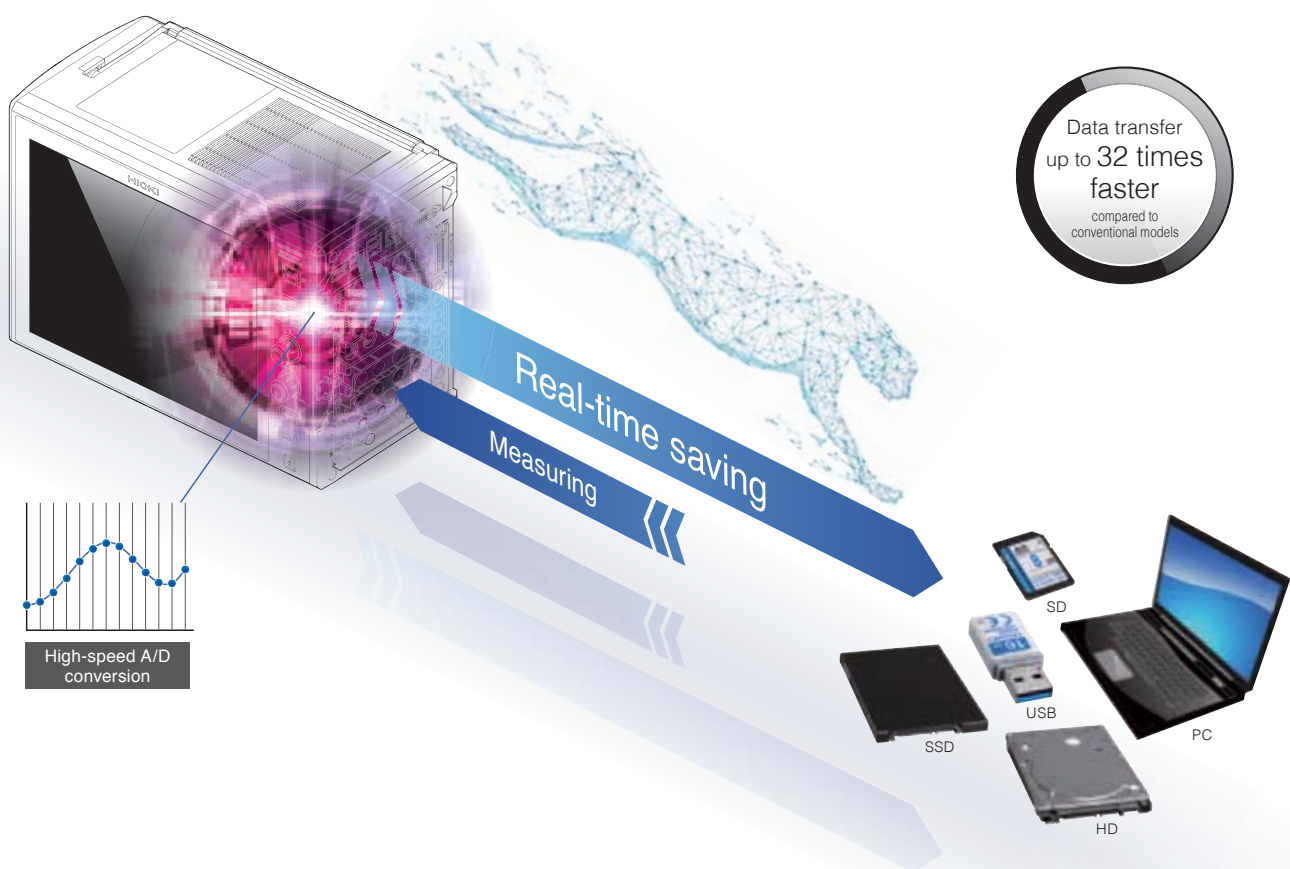

Drastically increased data transfer speed


Data transfer to storage devices is now up to 32 times faster. While conventional models transferred data at 1 MS/s in a single channel, the MR6000 transfers data for 32 channels.

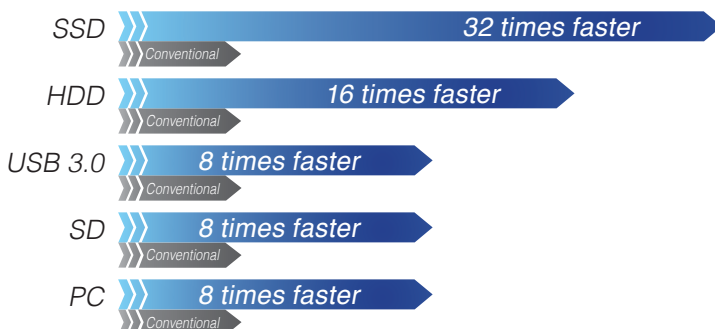

*Compared to other recorders in the Hioki Memory HiCorder series.
 *Results vary according to measurement conditions.

Saving data directly to your PC




Transfer measurement data directly to your PC by using the FTP sending function together with the real-time save function. This makes it easier to observe data after the measuring process.

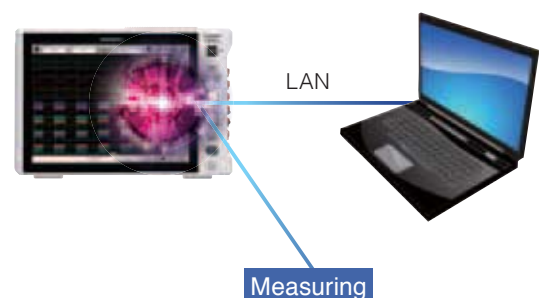

Longest Continuous Recording in the Entire Series

Long-term recording and high-speed sampling in multiple channels All in a single measurement

The real-time save function controls the available measurement duration without relying on the capacity of the internal storage memory. For long-term recording, we recommend a high-capacity SSD or HD unit. You can also use a more convenient USB memory stick or SD memory card. All phenomena can be recorded at a high sampling rate over a long period of time. This feature is ideal for situations where it is hard to predict the nature of a phenomenon or for measurements that can only be performed once. When saved in real time, data is split into several 512 MB files.

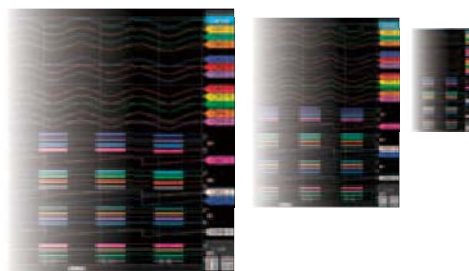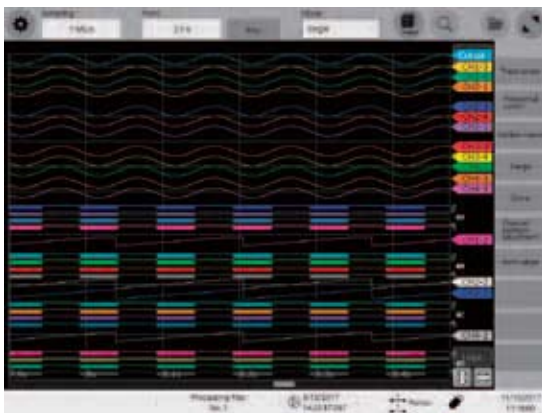

1 hour of continuous recording across as many as 32 channels at 1 MS/s

Available real-time save duration for various media

Save destination	Sampling speed	Number of channels	Available measurement duration	Maximum sampling rate for real-time save *1
SSD UNIT U8332 (256 GB)	1 MS/s	32 ch	Approx. 1 h	20 MS/s
HD UNIT U8333 (320 GB)	1 MS/s	16 ch	Approx. 2 h 40 min	10 MS/s
USB DRIVE Z4006 (16 GB)	1 MS/s	8 ch	Approx. 16 min	5 MS/s *2
SD MEMORY CARD Z4003 (8 GB)	1 MS/s	8 ch	Approx. 8 min	5 MS/s
PC	1 MS/s	8 ch	Depends on PC capacity	5 MS/s

*1: For 2 channels (no settings for 1 channel) *2: When using the USB 3.0 connector


Maximum recording duration for real-time save with an SSD UNIT U8332/Reference values

d: days h: hours min: minutes s: seconds


Sampling rate	Number of channels used				
	2	4	8	16	32
20 MS/s	53 min 20 s	-	-	-	-
10 MS/s	1 h 46 min 40 s	53 min 20 s	-	-	-
5 MS/s	3 h 33 min 20 s	1 h 46 min 40 s	53 min 20 s	-	-
2 MS/s	8 h 53 min 20 s	4 h 26 min 40 s	2 h 13 min 20 s	1 h 6 min 40 s	-
1 MS/s	17 h 46 min 40 s	8 h 53 min 20 s	4 h 26 min 40 s	2 h 13 min 20 s	1 h 6 min 40 s
500 kS/s	1 d 11 h 33 min 20 s	17 h 46 min 40 s	8 h 53 min 20 s	4 h 26 min 40 s	2 h 13 min 20 s
200 kS/s	3 d 16 h 53 min 20 s	1 d 20 h 26 min 40 s	22 h 13 min 20 s	11 h 6 min 40 s	5 h 33 min 20 s
100 kS/s	7 d 9 h 46 min 40 s	3 d 16 h 53 min 20 s	1 d 20 h 26 min 40 s	22 h 13 min 20 s	11 h 6 min 40 s
50 kS/s	14 d 19 h 33 min 20 s	7 d 9 h 46 min 40 s	3 d 16 h 53 min 20 s	1 d 20 h 26 min 40 s	22 h 13 min 20 s
20 kS/s	37 d 0 h 53 min 20 s	18 d 12 h 26 min 40 s	9 d 6 h 13 min 20 s	4 d 15 h 6 min 40 s	2 d 7 h 33 min 20 s
10 kS/s	74 d 1 h 46 min 40 s	37 d 0 h 53 min 20 s	18 d 12 h 26 min 40 s	9 d 6 h 13 min 20 s	4 d 15 h 6 min 40 s
5 kS/s	148 d 3 h 33 min 20 s	74 d 1 h 46 min 40 s	37 d 0 h 53 min 20 s	18 d 12 h 26 min 40 s	9 d 6 h 13 min 20 s
2 kS/s	∴	185 d 4 h 26 min 40 s	92 d 14 h 13 min 20 s	46 d 7 h 6 min 40 s	23 d 3 h 33 min 20 s
1 kS/s	∴	∴	185 d 4 h 26 min 40 s	92 d 14 h 13 min 20 s	46 d 7 h 6 min 40 s
500 S/s			∴	185 d 4 h 26 min 40 s	92 d 14 h 13 min 20 s
200 S/s				∴	231 d 11 h 33 min 20 s
100 S/s					∴

Long-term measurements for more efficient testing

The real-time save function boasts high-speed sampling and multi-channel measurements. Perform an approximately 1-hour measurement at 20 MS/s in 2 channels or 1 MS/s in 32 channels.

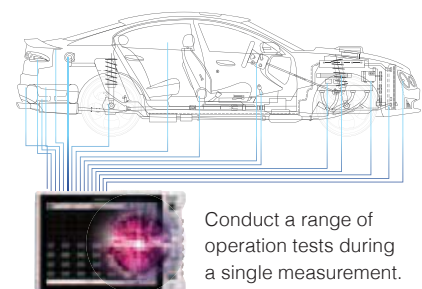

Conduct a range of operation tests during a single measurement.

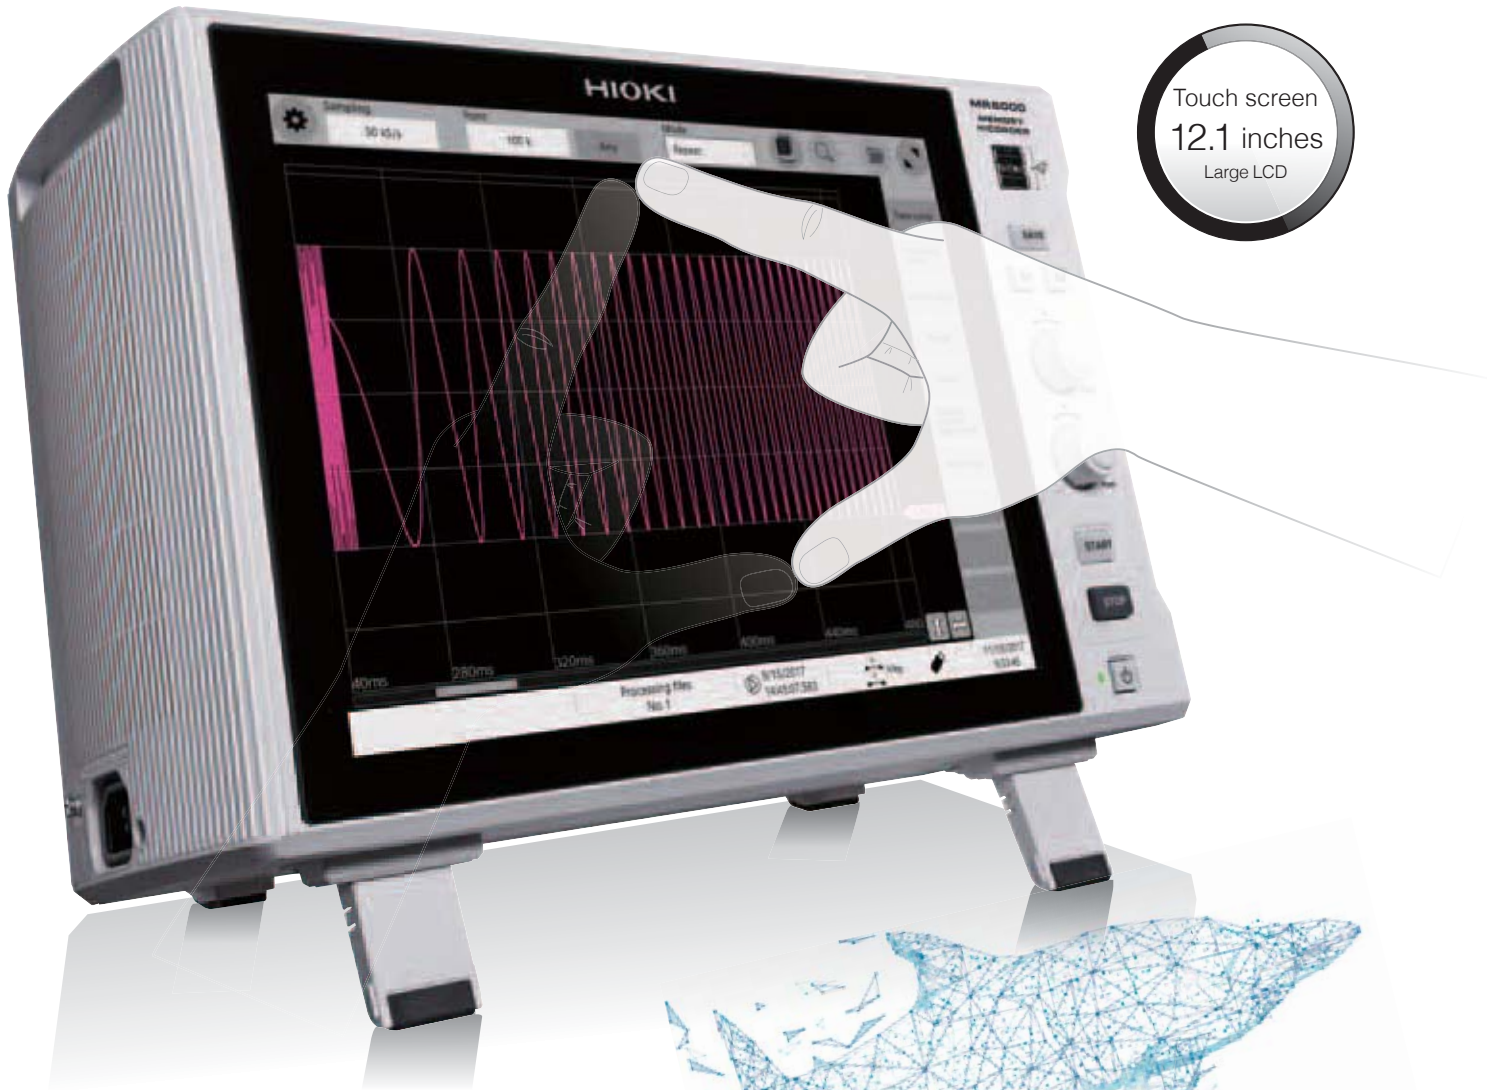


User-Friendly Flexible Design

Fast and convenient touch screen Operation as smooth as silk

The capacitive touch screen delivers intuitive operability.

Select a setting item directly by tapping the screen, and use your fingers to enlarge the part you want to see.

The new user interface makes setting measurement items for multiple channels easier compared to the more complicated conventional models where you had to press the keys several times to configure a setting.

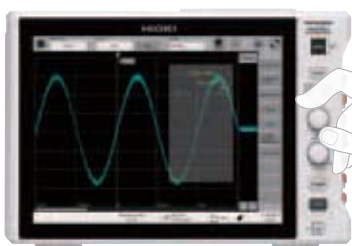

▲ Use the rotary knobs to move the tracing cursor.



▲ Simply tap the screen to switch between the items you want to set.


Easy method for pinpointing a specific waveform within large amounts of measurement data

Set the peak values or trigger conditions you want to search for to have the relevant data retrieved and displayed automatically. Our new Memory HiCorder Concierge function automatically calculates the characteristics of the reference waveform you have set and searches all of the measured data to detect and array any waveforms with low similarity as anomalous waveforms. This drastically reduces the amount of time required to search for anomalies by eliminating the need to scroll through measured waveforms and check them visually.

Memory HiCorder Concierge

Use the Concierge to look for anomalous waveforms.

A new waveform search function finds anomalous waveforms in all of the measured data. This function is ideal for situations where it is difficult to set the right triggers before measuring because the nature of potential anomalies cannot be predicted.

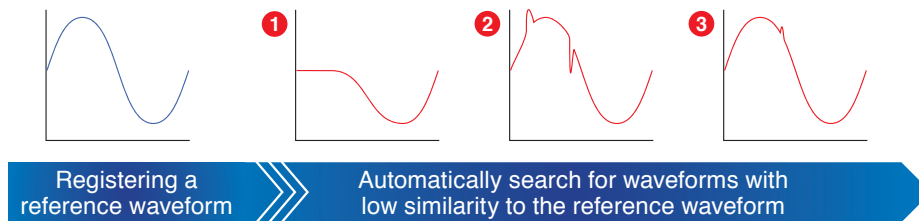

Rich set of search functions

Peak search

Search for the maximum value, minimum value, local maxima, or local minima in all of the measured data, and mark the search point in the waveform.

Trigger search

Set trigger conditions for all of the measured data again to search for points where the conditions are fulfilled, even if no triggers were set during the measuring process.


Jump

Jump to an event mark you made while measuring, to the cursor position on the display, or to the location measured at a specified time.

Radically improved data saving time

Transferring very large amounts of data measured over a long period of time used to be very time-consuming. The MR6000 features a brand new interface and faster internal processing, reducing the time required to save measurement data to media. This saves you the trouble of waiting for data to be saved and improves work efficiency.

USB 2.0	Existing models		
	MR6000		◀ Reduced to 1/5
USB 3.0	MR6000		◀ Further reduced to 1/10
HD	Existing models		
	MR6000		◀ Reduced to 1/20
SSD	MR6000		◀ Further reduced to 1/30

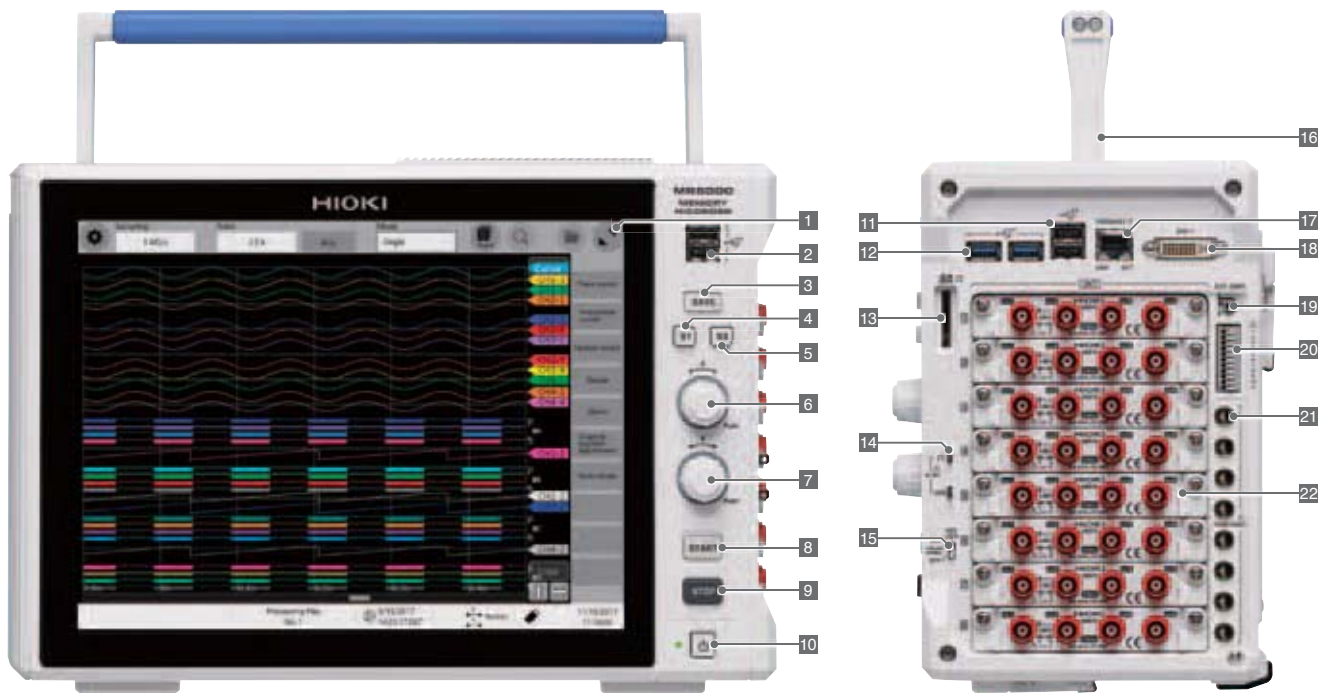

Multifunctional Interface

Only 6 keys in total New recorder design

Use the touch screen to configure all the basic settings.



Open or close the top panel of the main unit.
Z4006 USB DRIVE installable.

<p>1 Display 12.1-inch capacitive touch screen TFT color LCD display</p>	<p>9 STOP button For importing the set recording length and stopping the measuring process</p>	<p>17 1000 BASE-T connector For connecting to the network via LAN cable</p>
<p>2 USB 2.0 connector x2 For connecting a USB memory stick, USB mouse, or USB keyboard</p>	<p>10 Power button For turning the power on or off</p>	<p>18 DVI terminal For outputting the screen display</p>
<p>3 SAVE button For displaying the manual save dialog box</p>	<p>11 USB 2.0 connector x2 For connecting a USB memory stick, USB mouse, or USB keyboard</p>	<p>19 External sampling terminal For inputting various external sampling signals</p>
<p>4 Shortcut button 1 For registering frequently used settings</p>	<p>12 USB 3.0 connector x2 For connecting a USB memory stick, USB mouse, or USB keyboard</p>	<p>20 External control terminal For inputting various external signals to control the device</p>
<p>5 Shortcut button 2 For registering frequently used settings</p>	<p>13 SD MEMORY CARD slot For inserting SD memory cards</p>	<p>21 Dedicated power supply terminal for current clamp For supplying power to the current sensor (Option)</p>
<p>6 Rotary knob X For moving the tracing cursor and scrolling or zooming the waveform in and out</p>	<p>14 Output terminal for probe compensation signals For outputting 10:1 or 100:1 PROBE compensation signals</p>	<p>22 Various units Install input units appropriate for the measurement target</p>
<p>7 Rotary knob Y For changing the position and zooming the waveform in and out</p>	<p>15 KEY LOCK For disabling the touch screen and buttons</p>	<p>23 Air inlet For reducing the internal temperature</p>
<p>8 START button To begin the measuring process</p>	<p>16 Handle For carrying the device</p>	<p>24 Media box For USB 3.0 connectors (USB memory sticks only)</p>

Operability and visibility suited for a variety of work environments





17°

Ergonomical operating angle

Our search for a touch screen with the best operability and visibility angle led us to develop retractable feet that maximize those two important attributes. Tilting the MR6000 with the feet reduces the strain on your wrists when you use the device on a desk, and keeps your line of sight at a natural level. The rear side also features the same retractable feet, making it easy to use the device on the floor.

Easy multi-touch

Horizontal and vertical

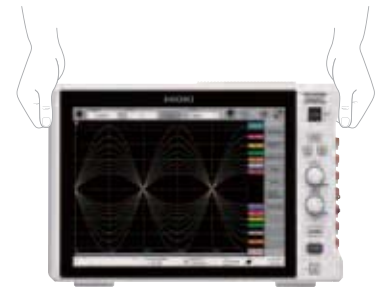


Convenient long handle

Robust design

Easy handling

The rubber handle boasts excellent grip and makes it easy to carry the device with either one or both hands. The grips on either side of the device can also be used to lift it with both hands.

Simple protectors on the top and bottom right side of the device protect the interface and unit input terminals from sudden physical shocks.

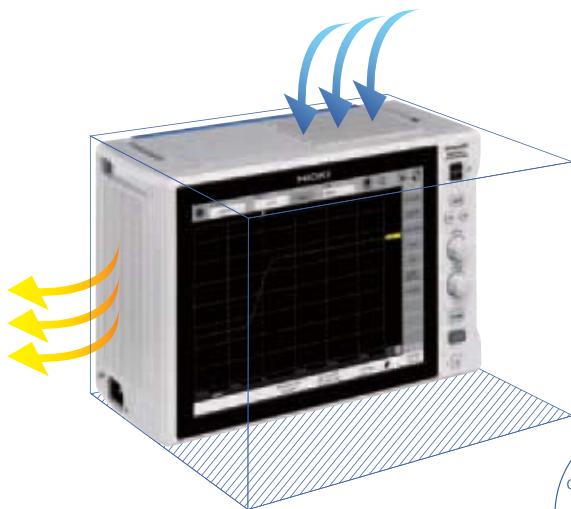

Space-saving size

We have achieved a design that is compact while still delivering blazing fast processing speeds by using thermal liquid analysis to optimally position the air inlets, heating components, and cooling fans. The smaller form factor requires less space for installation, making the device just right for tight workspaces.

Compared to conventional models

1/2 size

When compared to 8861-50

Sleek details

The bevelled chassis edges give the device a compact and sleek look. The left side is slightly curved with slits to match the mesh of the air outlet. The air outlet is therefore in harmony with the design of the flat and solid-looking chassis. The simple and refined appearance achieved by these efforts well suits a device used for R&D purposes.

Refined attractive shape

Simple design



Product Specifications

Basic specifications (Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)		
Recording method	Normal: Regular waveform recording Envelope: Periodically recording maximum and minimum values *Envelope setting not available with external sampling	
No. of channels	Analog with up to 32 channels (with 4ch ANALOG UNIT U8975) Logic with up to 128 channels (LOGIC UNIT 8973) *Common GND for the logic probe input connector and main unit	
Maximum sampling rate	200 MS/s (all channels at the same time) (with HIGH SPEED ANALOG UNIT U8976) External sampling (10 MS/s)	
Memory capacity	1 G-words	
Operating environment	Indoors, pollution degree 2, altitude up to 2000 m (6562.20 ft)	
Operating temperature and humidity range	0°C to 40°C (32°F to 104°F), less than 80% RH (no condensation)	
Storage temperature and humidity range	-10°C to 50°C (14°F to 122°F), 80% RH or less (no condensation)	
Compliance standards	Safety: EN61010, EMC EN61326	
Power supply	Rated supply voltage: AC 100 V to 240 V (consider ±10% voltage fluctuations for rated supply voltage) Rated power supply frequency: 50 Hz / 60 Hz Anticipated transient overvoltage: 2500 V	
Max. power consumption	300 VA	
Clock	Auto-calendar, leap-year correcting 24-hour clock	
Backup battery life	Approx. 10 years (at 23°C (73°F)) for clock and settings	
PC interface (overview)	LAN, USB, SD, SATA, monitor	
External dimensions	353 mm (13.90 in) W x 235 mm (9.25 in) H x 154.8 mm (6.09 in) D (excluding protrusions)	
Mass	6.5 kg (229.3 oz) (main unit only) 6.7 kg (236.3 oz) (with Z5021, U8332, or U8333 installed) 6.9 kg (313.9 oz) (with HIGH SPEED ANALOG UNIT U8976 installed)	
Accessories	Power cord, Quick Start Manual (booklet), operating precautions (booklet), application disk (CD-R), Instruction Manual (detailed edition) (CD-R), Instruction Manual (calculation edition) (CD-R), blank panel (blank slot only)	
Accuracy		
Accuracy guarantee conditions	Temperature and humidity range: 23°C ±5°C (73°F ±9°F), 80% RH or less	
Time axis accuracy	±0.0005%	
Display		
Display type	12.1 inch XGA TFT color LCD (1024 x 768 dots) with capacitive touch screen	
LAN interface		
Compatibility specifications	IEEE 802.3 Ethernet 1000BASE-T, 100BASE-TX, 10BASE-T	
Functions	DHCP, DNS, FTP, HTTP, e-mail sending function	
Connector	RJ-45	
USB interface		
Compatibility specifications	USB 3.0 compliant x 3, USB 2.0 compliant x 4	
Host	Connector: Series A receptacle Connected devices: Keyboard, mouse, USB memory stick	
Available options	Z4006 USB MEMORY STICK (16 GB)	
SD card slot		
Compatibility specifications	Compliant with SD standards x 1 (compatible with SD, SDHC, SDXC memory cards)	
Available options	Z4001 SD MEMORY CARD (2 GB), Z4003 SD MEMORY CARD (8 GB)	
SATA interface		
Compatibility specifications	Serial ATA Revision 3.0 compliant x 1	
Available options	U8332 SSD UNIT (256 GB), U8333 HD UNIT (320 GB)	
Monitor output		
Connector	DVI-I	
Output type	Digital output for external displays 1024 x 768 (XGA)*Not compatible with dual link	
External sampling terminal		
Connector	SMB	
Maximum input voltage	10 V DC	
Input voltage	2.5 V to 10 V for high level, 0 V to 0.8 V for low level	
Response pulse width	50 ns or more during high periods, 50 ns or more during low periods	
Maximum input frequency	10 MHz	
Functions	External sampling clock input, rising/falling selection possible	
External control terminals		
Terminal block	Push-button type	
External input	Maximum input voltage	10 V DC
	Input voltage	2.5 V to 10 V for high level, 0 V to 0.8 V for low level
	Response pulse width	50 ms or more during high periods, 50 ms or more during low periods
	Pulse interval	200 ms or greater
	Number of terminals	2
External output	Functions	START, STOP, START/STOP, SAVE, ABORT, event
	Output type	Open drain output (active low, with 5 V voltage output)
	Output voltage	4.0 V to 5.0 V for high level, 0 V to 0.5 V for low level
	Maximum input voltage	50 V DC, 50 mA, 200 mW
	Number of terminals	2
External trigger	Functions	Judgment (PASS), judgment (FAIL), occurrence of errors, busy, trigger standby
	Maximum input voltage	10 V DC
	External trigger filter	ON / OFF
	Response pulse width	External trigger filter OFF: 1 ms or more during high periods, 2 us or more during low periods External trigger filter ON: 2.5 ms or more during high periods, 2.5 ms or more during low periods
	Functions	Rising/falling selection possible Rising: Triggering occurs when the voltage rises from low (0 V to 0.8 V) to high (2.5 V to 10 V). Falling: Triggering occurs when the voltage falls from high (2.5 V to 10 V) to low (0 V to 0.8 V) or when a terminal short circuit occurs. *Trigger timing: With the START&STOP option, rising/falling can be selected for either START or STOP.

Trigger output	Output type	Open drain output (active low, with 5 V voltage output)	
	Output voltage	4.0 V to 5.0 V for high level, 0 V to 0.5 V for low level	
	Maximum input voltage	50 V DC, 50 mA, 200 mW	
	Output pulse width	Level or pulse selection possible Level: Sampling period x data number after trigger Pulse: 2 ms ±1 ms	
Output terminal for probe correction signals			
Output signals	0 V to 5 V ±10%, 1 kHz ±1% square waves		
Functions	9665 10:1 PROBE, 9666 100:1 PROBE correction		
Dedicated power supply terminal for current sensor (Option to be specified upon order placement (with Z5021 PROBE POWER UNIT installed))			
Number of terminals	8		
Output voltage	±12 V ±0.5 V DC		
Trigger *Not available when the real-time save function is used			
Trigger type	Digital comparison type		
Trigger conditions	AND or OR condition for trigger sources and interval trigger		
Trigger source	Analog, logic, real-time waveform processing When START or STOP is selected: Up to 32 channels *Up to 4 analog triggers can be set for each analog channel. *Up to 4 logic triggers can be set for each logic probe. *Up to 2 analog triggers can be set for each real-time waveform processing channel. When START&STOP is selected: Up to 16 channels / group Analog: Up to 16 channels / group (Up to 2 channels per unit can be selected.) Logic: Up to 16 probes / group (Up to 2 probes per unit can be selected.) Real-time waveform processing: Up to 16 calculations / group *Up to 2 trigger types from each group can be set for each analog channel. *Up to 2 logic triggers from each group can be set for each logic probe. External trigger The free run function is activated if all trigger sources are turned off.		
	Level trigger	Triggering occurs when the set level rises (falls).	
	Voltage drop trigger	Triggering occurs when peak voltage drops below the set level. (For a 50 Hz / 60 Hz commercial power supply only) *Disabled when sampling rate is set to 200 MS/s. *Not available with MR8990 or 8970 *Not available with envelope setting	
	Window trigger	Sets the upper and lower limit for trigger level. Triggering occurs when leaving (OUT) or entering (IN) the area. *Disabled when sampling rate is set to 200 MS/s.	
	Period trigger	Sets the period reference value and cycle range. Triggering occurs when the rising (falling) reference value period is measured and determined to be outside or within the cycle range. *Disabled when sampling rate is set to 200 MS/s. *Not available with MR8990 or 8970 *Not available with envelope setting	
Analog triggers	Glitch trigger	Sets the reference value and pulse width (glitch width). Triggering occurs if the value is below the set pulse width from rising or falling of the reference value. *Disabled when sampling rate is set to 200 MS/s. *Not available with MR8990 *Not available with envelope setting	
	Specifying events	Specifying events (1 to 4000) Counts the number of times conditions were fulfilled for each trigger source. Triggering occurs when the set number of times is reached. *Not available when the trigger conditions are set to AND	
	Logic trigger	Pattern trigger using 1, 0, or x	
Forcible trigger	Included (Forcible triggering can be prioritized over all trigger sources.)		
Interval trigger	Recording possible at specified measuring intervals (hours, minutes, or seconds) The trigger conditions are fulfilled when the measuring process starts. Afterwards, the trigger conditions are met at the set measuring intervals.		
Trigger filter	Normal	OFF, 10, 20, 50, 100, 150, 200, 250, 500, 1000, 2000, 5000, 10,000 samples	
	Envelope	OFF, 1 ms, 10 ms	
Level setting resolution	1 LSB		
Pre-trigger	0% to 100% (any value set in 1% steps available), displaying the recording time for pre-trigger		
Post-trigger	0% to 40%, displaying the recording time for post-trigger		
Trigger priority	ON / OFF		
Trigger mark	Displays trigger marks for the positions where triggers are set.		
Trigger timing	START, STOP, START&STOP		
Waveform monitoring display	Displays the waveform monitor in the trigger standby state. (The display can be turned off.)		
Waveform screen			
Numerical display format	Waveform display in chronological order	1 screen, 2 screens, 4 screens, 8 screens, 16 screens *Displays up to 64 channels per sheet. *Multiple sheets can be set for the same channel.	
Sheet function	Up to 16 sheets	*The display format can be selected for each sheet.	
Zoom display	ON / OFF (Waveforms are displayed in chronological order in the top part of the waveform screen, whereas the zoomed waveforms are displayed in the bottom part.)		
Full screen display	Displays waveforms over the entire waveform screen.		
Waveform display	Waveform color	Fixed colors (32 colors)	
	Interpolation	Linear	
	Variable display	Always ON	
	Vernier	Adjustable input waveform (Adjustment range: 50% to 200% of the input)	
	Grid	OFF / ON	
Enlarge / Reduce	Logic display width	Wide / Standard / Narrow	
	Waveform inversion	Displays waveforms upside down. *Not available with 8967, 8970, and 8973	
	Waveform scrolling	Allows you to adjust the zoom ratio as necessary by pinching in or out.	
Roll display mode	Scroll left or right by swiping the screen and scroll back while measuring.		
Waveform monitoring function	Always displays the latest data by following the measuring process. The drawing start position (left or right edge) can be selected. *The roll cannot be displayed when the overlay function is turned on.		
Overlay	ON / OFF (The monitor can also be displayed in the trigger standby state.)		
Cursor	The OFF, automatic, or manual option can be selected. *The roll cannot be displayed when the overlay function is turned on.		
	Tracing cursor	Up to 8 cursors can be displayed. *Displays potential, time from trigger, time difference between cursors, and potential difference.	
	Horizontal cursor	Up to 8 cursors can be displayed. *Displays potential and potential difference.	
	Gauge	Up to 8 gauges can be displayed.	
	Specifying segments	Segment cursor 1 / Segment cursor 2 *Specifies the calculation range, saving range, and search range.	
Event mark	Jump	Tap the screen to jump to the specified location.	
	Input available during the measuring process (up to 1000 marks) Use the start button or external input terminal for input.		

Setting screen	
Sampling rate	Normal 200 M, 100 M, 50 M, 20 M, 10 M, 5 M, 2 M, 1 M 500 k, 200 k, 100 k, 50 k, 20 k, 10 k, 5 k, 2 k, 1 k 500, 200, 100, 50, 20, 10, 5, 2, 1 [S/s] *The speed for real-time waveform processing can be set from 100 MS/s. External sampling: Depending on the input signal of the external sampling terminal Up to 10 MHz
	Envelope 10 M, 5 M, 2 M, 1 M 500 k, 200 k, 100 k, 50 k, 20 k, 10 k, 5 k, 2 k, 1 k 500, 200, 100, 50, 20, 10, 5, 2, 1 [S/s] 30, 12, 6, 2, 1 [S/min] *Calculation speed for maximum and minimum values *Oversampling rate: 100 MS/s
	For real-time saving *The values in () indicate the number of channels used. Maximum available sampling rate [Save destination: SSD] 20 MS/s (2 channels), 10 MS/s (4 channels), 5 MS/s (8 channels), 2 MS/s (16 channels), 1 MS/s (32 channels), 500 kS/s (64 channels) [Save destination: HDD] 10 MS/s (2 channels), 5 MS/s (4 channels), 2 MS/s (8 channels), 1 MS/s (16 channels), 500 kS/s (32 channels), 200 kS/s (64 channels) [Save destination: SD memory card, USB memory stick, sending to FTP] 5 MS/s (2 channels), 2 MS/s (4 channels), 1 MS/s (8 channels), 500 kS/s (16 channels), 200 kS/s (32 channels), 100 kS/s (64 channels) *Guaranteed only when the available option is specified for the save destination.
Maximum recording length	Normal [Built-in presets] 20 M (32 channels), 50 M (16 channels), 100 M (8 channels), 200 M (4 channels), 500 M (2 channels), 1 G (1 channel) [Point] [Arbitrary recording length] 33554400 (32 channels), 67108800 (16 channels), 134217700 (8 channels), 268435400 (4 channels), 536870900 (2 channels), 1073741800 (1 channel) [Point] *Setting is possible in units of 100 points.
	Envelope [Built-in presets] 10 M (32 channels), 20 M (16 channels), 50 M (8 channels), 100 M (4 channels), 200 M (2 channels), 500 M (1 channel) [Point] [Arbitrary recording length] 16777200 (32 channels), 33554400 (16 channels), 67108800 (8 channels), 134217700 (4 channels), 268435400 (2 channels), 536870900 (1 channel) [Point] *Setting is possible in units of 100 points.
	For real-time saving Determined according to the amount of free space in the save destination, file system, and number of measurement channels *The values in () indicate the number of channels used. In U8975, CH1/CH2 or CH3/CH4 count as a single channel. Each real-time waveform processing operation counts as a single channel. *In U8975, MR8990, or real-time waveform processing, the maximum recording length at a sampling rate of 10 MS/s or less is half the length or less compared to the values listed above.
Repeated measurements	Single, repeated, specified number of times *Repeated measurements cannot be set and the number of times cannot be specified for real-time saving.
Waveform monitoring function	Displayed on the channel setting screen
Scaling	Conversion ratio and offset / 2-point input / Model / Output rate / dB / Rating *Model: Select a model to configure the scaling settings automatically. *Automatic detection and automatic scaling are available when a current unit is used.
Comments	Title comments, channel comments Channel numbers and channel comments are added on the setting screen and waveform screen.
Digital filter *MR6000-01 only (Option to be specified upon order)	Calculation formulas 32 formulas
	Calculation targets Measurement channels in 8966, 8967, 8968, U8969, 8970, 8971, 8972, U8974, U8975, U8976 *The 8973 and MR8990 measurement channels are not targeted.
	Calculation update rate 10 M / 1 M / 100 k / 10 k / 1 k / 100 / 10 / 1 [S/s] *Up to 8 calculations can be set for 10 MS/s. *Up to 16 calculations can be set for 1 MS/s.
	Calculation delay Calculation update rate 10 MS/s 1 MS/s 100 kS/s 10 kS/s or less Calculation delay 6.2 or 6.3 us 5 us 20 us Calculation update rate period
Filter types	FIR (LPF / HPF / BPF / BSF), IIR (LPF / HPF / BPF / BSF), moving average, delay device
Saving	
Save destination	SD MEMORY CARD Z4001 (2 GB), Z4003 (8 GB)
	USB MEMORY STICK Z4006 (16 GB)
	SSD U8332 SSD UNIT (256 GB)
	HDD U8333 HD UNIT (320 GB)
	Sending via FTP PC with a LAN connection
File format	FAT, FAT32, NTFS, exFAT
Filename	Alphanumeric and Japanese input
Processing identical filenames	Adding a serial number at the beginning before saving
Auto saving	ON / OFF *Automatically saves the data obtained for the recording length at the end of a measuring process. *Settings files are not supported. *This function is not available when real-time saving is selected.
Real-time saving	ON / OFF *Saves the waveform data (binary) obtained during the measuring process directly to the save destination. *The auto saving function is not available. File division Files are divided for approx. every 512 MB of data.
Deleting and saving	Deletes the files with the oldest creation dates and saves data when there is no free space left on the specified media at the save destination. *Enabled for auto saving and real-time saving.
Types of saved data	Settings data SET
	Measurement data Binary format (.MEM, .REC, .FLT), text format (.CSV)
	Index Divided saving (.IDX)
	Displayed images .BMP, .PNG, .JPG
	Numerical calculation results .CSV
	Startup (STARTUP.SET)
Saving channels	Select a channel from all the channels available or from the displayed channels when saving measurement data.
Culled data saving	Measurement data (text format) is culled according to the specified culling value (from 2 to 1000) before saving.
File division *Real-time saving excluded	Types of saved data Division method
	Binary format OFF / Every 16 MB of data / Every 32 MB of data / Every 64 MB of data
	Text format OFF / Every 60,000 points of data / Every 1,000,000 points of data
Specifying files	Numerical calculation results OFF / By the calculation number
	New files / Existing files *Enabled when numerical calculation results are saved. *Select whether to create a new file or add data to an existing file when starting to measure.

SAVE button operation	Instant saving	Press the SAVE button to save data to a save destination, under a filename, and with saving settings that have been pre-set.
	Saving range	Select the full range or a specific segment. *Enabled only when data is saved with the SAVE key.
Loading data		
Loading source	SD MEMORY CARD	Z4001 (2 GB), Z4003 (8 GB)
	USB MEMORY STICK	Z4006 (16 GB)
	SSD	U8332 SSD UNIT (256 GB)
	HDD	U8333 HD UNIT (320 GB)
Types of loaded data	Settings data (.SET) Measurement data Binary format (.MEM, .REC) Index Divided saving (.IDX) Startup (STARTUP.SET)	
Numerical calculations		
Maximum number of calculations	16 items x Measurement channels	
Calculation range	Full range / Specified segments	
Calculation items	Normal	Peak to peak value, maximum value, minimum value, high-level, low-level, average value, effective (RMS) value, standard deviation, rise time (°), fall time (°), frequency (°), period (°), duty ratio (°), pulse count, area value, X-Y area value, time difference (°), phase difference (°), time to maximum value, time to minimum value, specified level time, specified time level, pulse width (°), four arithmetic operations, median value, amplitude, integration value, burst width (°), X-Y waveform angle, overshoot, undershoot, +width (°), -width (°) *Statistical function available for: Beginning, average, maximum, minimum
Numerical judgment	Targeted waveforms	Analog channels, logic channels, real-time waveform processing channels
	Judgment settings	ON / OFF
	Stop conditions	PASS, FAIL, PASS&FAIL
Real-time waveform processing *Option to be specified upon order placement (MR6000-01)		
Maximum number of calculations	16 formulas	
Calculation targets	Measurement channels in 8966, 8967, 8968, U8969, 8970, 8971, 8972, 8973, U8974, MR8990 (°), U8975, U8976 *The MR8990 DVM UNIT performs calculations only for the top 16 bits of the 24-bit AD resolution.	
Calculation update rate	10 M, 1 M, 100 k, 10 k, 1 k, 100, 10, 1 [S/s] *Up to 8 calculations can be set for 10 MS/s. *Some types of calculations cannot be set with certain calculation update rates.	
Calculation delay	Calculation update rate	10 MS/s 1 MS/s 100 kS/s 10 kS/s or less
	Calculation delay	6.2 or 6.3 us 5 us 20 us Calculation update rate period
Calculation type	Add the delay times listed below when real-time waveform processing channels are selected for calculation.	
	Calculation update rate	10 MS/s 1 MS/s 100 kS/s 10 kS/s or less
Calculation type	Added calculation delay	
	Calculation delay	1.6 us 2 us 10 us Calculation update rate period
Calculation type	Addition, subtraction, multiplication, division, four arithmetic operations with coefficients, quartic equations, monomials, polynomial addition and subtraction, differentiation, integrals, integration, FIR (LPF / HPF / BPF / BSF), IIR (LPF / HPF / BPF / BSF), moving average, delay device	
Waveform search *Disabled with envelope setting (only jump enabled)		
Search mode	Trigger	Level, window-in, window-out Logic trigger search is available when a logic channel is selected as the targeted channel.
	Peak	Maximum value, minimum value, local maxima, local minima
	CONCIERGE	Histogram, standard deviation *Select whether to compare each value to the reference waveform or to the directly preceding waveform.
	Jump	Event mark, cursor, time (absolute time, relative time, or time specified by the number of points)
Search range	Full range	All of the data stored in the internal memory
	Specifying segments	Select either the range specified for segment 1 or the one specified for segment 2.
Search method	Full search	Searches through all of the search ranges at once. Up to 1000 data points can be searched.
	Partial search	Searches from the beginning (middle) of the search range. The search operation continues until the specified number of values are found, after which the results are displayed.
Display method	Specify a search location to display the data.	
Other		
Auto setup	Available (Start the unit by loading the settings data (STARTUP.SET) saved in advance after the power is turned on.) *Save destinations are searched for on the HDD/SSD first, followed by the SD and USB memory stick.	
Rotary knobs	X	In the horizontal direction, the sampling rate, compression rate, or display position can be changed and the cursor can be moved.
	Y	In the vertical direction, the measurement range, compression rate, or display position can be changed and the cursor can be moved.
Shortcut button	S1, S2	A function can be allocated.
Auto range	Available (The optimal sampling rate and measurement range for the input waveform are automatically set.) *Not available for envelope, real-time saving, or external sampling.	
Key lock	Three levels of settings are available: OFF, touch screen only, or touch screen and hard buttons.	
Beep sound	OFF / Alarm only / Alarm and operation	
Sending e-mails	Sending e-mails via SMTP	
	Sending timing	Automatic saving, saving with the SAVE button
Initialization	Sent data Attach data specified in the main text or files specified by a type of saved data.	
Self-check	Waveform data initialization, setting initialization, complete initialization	
Language	Memory, LCD, buttons, LAN, media, touch screen	
Error and warning display	English, Japanese	
Touch keyboard	Displays the details of errors and warnings when they occur.	
Time value display	Displays the on-screen keyboard.	
Zero position display	Hours, sexagesimal time, date, data values	
Waveform screen background color	ON / OFF	
Restart permission	Black or white	
Display settings	Permitted / Not permitted *Permitted: If settings are changed during the measuring process, the unit is restarted. *Not permitted: Settings cannot be changed during the measuring process.	
Time settings	Adjust brightness or set the display to turn off automatically.	
System protection function	Set the date and time.	
Number of current sensor connections	ON / OFF Protects the system against unintentional power shutdowns. (However, we recommend turning off the system protection function and mounting an external UPS when using the unit continuously for long periods of time.)	
Unit installation restrictions	Up to 8 connections altogether on the PROBE POWER UNIT Z5021 and CURRENT UNIT 8971	
	Up to 4 slots	

Option Specifications (sold separately)

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 280 g (9.9 oz)

Accessories: None



HIGH SPEED ANALOG UNIT U8976	
Measurement functions	No. of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 22 pF) Max. rated voltage to ground: 1000 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	100, 200, 400 mV f.s. 1, 2, 4, 10, 20, 40, 100, 200, 400 V f.s., 12 ranges AC voltage for possible measurement/display: 280 V rms Low-pass filter: 5/500/5 k/1 MHz
Measurement resolution	1/1600 of measurement range (using 12-bit A/D conversion)
Maximum sampling rate	200 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% f.s. (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 30 MHz -3 dB (with AC coupling: 7 Hz to 30 MHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (with direct input), 1000 V DC (with 9665)

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)

Accessories: None



DC/RMS UNIT 8972	
Measurement functions	No. of channels: 2, for voltage measurement, DC/RMS selectable
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF) Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	100, 200, 400 mV f.s. 1, 2, 4, 10, 20, 40, 100, 200, 400 V f.s., 12 ranges AC voltage for possible measurement/display: 280 V rms Low-pass filter: 5/50/500/5 k/100 kHz
Measurement resolution	1/2000 of measurement range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% f.s. (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz) ±3% f.s. (1 kHz to 100 kHz) Response time: SLOW 5 s (rise time from 0 to 90% of full scale), MID 800 ms (rise time from 0 to 90% of full scale), FAST 100 ms (rise time from 0 to 90% of full scale) Crest factor: 2
Frequency characteristics	DC to 400 kHz -3 dB (with AC coupling: 7 Hz to 400 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (the maximum voltage that can be applied across input pins without damage)

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)

Accessories: None



ANALOG UNIT 8966	
Measurement functions	No. of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF) Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	100, 200, 400 mV f.s. 1, 2, 4, 10, 20, 40, 100, 200, 400 V f.s., 12 ranges AC voltage for possible measurement/display: 280 V rms Low-pass filter: 5/50/500/5 k/50 k/500 kHz
Measurement resolution	1/2000 of measurement range (using 12-bit A/D conversion)
Maximum sampling rate	20 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% f.s. (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 5 MHz -3 dB (with AC coupling: 7 Hz to 5 MHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (the maximum voltage that can be applied across input pins without damage)

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 230 g (8.1 oz)

Accessories: None



HIGH-VOLTAGE UNIT U8974	
Measurement functions	No. of channels: 2, for voltage measurement, DC/RMS selectable Max. rated voltage to ground: 1000 V AC, DC for measurement category IV
Input terminals	Banana input terminal (input impedance: 4 MΩ, input capacitance: 5 pF)
Measurement range	4, 10, 20, 40, 100, 200, 400, 1000 V f.s. (DC mode), 8 ranges 10, 20, 40, 100, 200, 400, 1000 V f.s. (RMS mode), 7 ranges Low-pass filter: 5/50/500/5 k/50 kHz
Measurement resolution	1/32,000 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s
Measurement accuracy	±0.25% f.s. (with filter 5 Hz, zero position accuracy included)
RMS measurement	RMS accuracy: ±1.5% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 100 kHz) Response time: High speed 150 ms, medium speed 500 ms, low speed 2.5 s
Frequency characteristics	DC to 100 kHz -3 dB
Input coupling	DC / GND
Maximum input voltage	1000 V DC, 700 V AC

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)

Accessories: None



4ch ANALOG UNIT U8975	
Measurement functions	No. of channels: 4, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF) Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	4, 10, 20, 40, 100, 200 V f.s., 6 ranges AC voltage for possible measurement/display: 140 V rms Low-pass filter: 5/500/5 k/200 kHz
Measurement resolution	1/32,000 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	5 MS/s (simultaneous sampling in 4 channels)
Measurement accuracy	±0.1% f.s. (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 2 MHz -3 dB
Input coupling	DC / GND
Maximum input voltage	200 V DC (the maximum voltage that can be applied across input pins without damage)

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 260 g (9.2 oz)

Accessories: None



DIGITAL VOLTMETER UNIT MR8990	
Measurement functions	No. of channels: 2, for DC voltage measurement
Input terminals	Banana input connectors (Input impedance: 100 MΩ or higher with 100 mV f.s. to 10 V f.s. range, otherwise 10 MΩ) Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	100, 1000 mV f.s. 10, 100, 1000 V f.s., 5 ranges
Measurement resolution	1/1,000,000 of measurement range (using 24-bit ΔΣ modulation A/D)
Integration Time	20 ms × NPLC (during 50 Hz), 16.67 ms × NPLC (during 60 Hz)
Response time	2 ms + 2 x integration time or less (rise - f.s. → + f.s., fall + f.s. → - f.s.)
Basic measurement accuracy	±0.01% rdg. ±0.0025% f.s. (at range of 1000 mV f.s.)
Maximum input voltage	500 V DC (the maximum voltage that can be applied across input pins without damage)

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)

Accessories: None



HIGH RESOLUTION UNIT 8968	
Measurement functions	No. of channels: 2, for voltage measurement
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF) Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Measurement range	100, 200, 400 mV f.s. 1, 2, 4, 10, 20, 40, 100, 200, 400 V f.s., 12 ranges AC voltage for possible measurement/display: 280 V rms Low-pass filter: 5/50/500/5 k/50 kHz
Anti-aliasing filter	Integrated filter for suppressing aliasing distortion caused by FFT processing (automatic cutoff frequency setting/OFF)
Measurement resolution	1/32,000 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.3% f.s. (with filter 5 Hz, zero position accuracy included)
Frequency characteristics	DC to 100 kHz -3 dB (with AC coupling: 7 Hz to 100 kHz -3 dB)
Input coupling	AC/DC/GND
Maximum input voltage	400 V DC (the maximum voltage that can be applied across input pins without damage)

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 245 g (8.6 oz)

Accessories: CONVERSION CABLE L9769 x2 (Cable length: 60 cm)



STRAIN UNIT U8969	
Measurement functions	No. of channels: 2, for distortion measurement (electronic auto-balancing, balance adjustment range within ±10,000 με or less)
Input terminals	NDIS connector EPRC07-R9FNDIS (via CONVERSION CABLE L9769, NDIS connector PRC03-12A10-7M10.5) Max. rated voltage to ground: 30 V AC rms or 60 V DC (with input isolated from the main unit, the maximum voltage that can be applied between input channel and chassis, and between input channels without damage)
Suitable transducer	Strain gauge converter, Bridge impedance: 120 Ω to 1 kΩ, Bridge voltage: 2 V ±0.05 V, Gauge rate: 2.0
Measurement range	400, 1000, 2000, 4000, 10,000, 20,000 με f.s., 6 ranges Low-pass filter: 5/10/100/1 kHz
Measurement resolution	1/25,000 of measurement range (using 16-bit A/D conversion)
Maximum sampling rate	200 kS/s (simultaneous sampling in 2 channels)
Measurement accuracy	±0.5% f.s. ±4 με (5 Hz filter ON)
Frequency characteristics	DC to 20 kHz +1/-3 dB

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: CONVERSION CABLE 9318 x 2 (To connect the current sensor to the 8971)



Cable length and mass: Input side: 70 cm (2.30 ft), Output side: 1.5 m (4.92 ft), approx. 170 g (6.0 oz)

CURRENT UNIT 8971	
(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% RH after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	No. of channels: 2, Current measurement with optional current sensor
Input terminals	Sensor connector (input impedance 1 MΩ, exclusive connector for current sensor via the CONVERSION CABLE 9318, common GND with recorder)
Compatible current sensors	CT6862, CT6863, 9709, CT6865, CT6841, CT6843, CT6844, CT6845, CT6846, 9272-10 (To connect to the 8971 via the CONVERSION CABLE 9318)
Measurement range	Using 9272-10 (20 A), CT6841: 2 A to 100 A f.s., 6 ranges Using CT6862: 4 A to 200 A f.s., 6 ranges Using 9272-10 (200 A), CT6843, CT6863: 20 A to 1000 A f.s., 6 ranges Using CT6844, CT6845, 9709, CT6846*1, CT6865*1: 40 A to 2000 A f.s., 6 ranges *1: The conversion ratio needs to be set to 2 for scaling.
Measurement accuracy (with 5 Hz filter ON) Note: Add the accuracy and attributes of the current sensor being used.	±0.65% f.s. RMS accuracy: ±1% f.s. (DC, 30 Hz to 1 kHz), ±3% f.s. (1 kHz to 10 kHz) RMS response time: 100 ms (rise time from 0 to 90% of full scale) Crest factor: 2 Frequency characteristics: DC to 100 kHz ±3 dB (with AC coupling: 7 Hz to 100 kHz)
Measurement resolution	1/2000 of measurement range (using 12-bit A/D conversion)
Maximum sampling rate	1 MS/s (simultaneous sampling in 2 channels)
Other functions	Input coupling: AC/DC/GND, Low-pass filter: 5/50/500/5 k/50 kHz

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 204.5 mm (8.05 in) D, approx. 240 g (8.5 oz)
Accessories: Ferrite clamp x 2



Cable length and mass: Main unit cable 1.3 m (4.27 ft), input section cable 46 cm (1.51 ft), approx. 350 g (12.3 oz)



TEMP UNIT 8967	
(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% RH after 30 minutes of warm-up time and zero adjustment; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	No. of channels: 2, for temperature measurement with thermocouple (voltage measurement not available)
Input terminals	Thermocouple input: Push-button terminal block, Recommended wire diameter: single-wire 0.14 to 1.5 mm ² , braided wire 0.14 to 1.0 mm ² (conductor wire diameter φ0.18 mm or more), AWG 26 to 16 Input impedance: min. 5 MΩ (with line fault detection ON/OFF) Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Temperature measurement range Note: Upper and lower limit values depend on the thermocouple	200°C (392°F) f.s. (-100°C to 200°C (-148°F to 392°F)), 1000°C (1832°F) f.s. (-200°C to 1000°C (-328°F to 1832°F)), 2000°C (3632°F) f.s. (-200°C to 2000°C (-328°F to 3632°F)), 3 ranges Measurement resolution: 1/20,000 of measurement range (using 16-bit A/D conversion)
Thermocouple range (JIS C 1602-1995) (ASTM E-988-96)	K: -200°C to 1350°C (-328°F to 2462°F), J: -200°C to 1100°C (-328°F to 2012°F), E: -200°C to 800°C (-328°F to 1472°F), T: -200°C to 400°C (-328°F to 752°F), N: -200°C to 1300°C (-328°F to 2372°F), R: 0°C to 1700°C (32°F to 3092°F), S: 0°C to 1700°C (32°F to 3092°F), B: 400°C to 1800°C (752°F to 3272°F), W (WRεS-26): 0 to 2000°C (32°F to 3632°F) Reference junction compensation: internal/ external (switchable), line fault detection ON/OFF possible
Data refresh rate	3 methods, Fast: 1.2 ms (digital filter OFF), Normal: 100 ms (digital filter 50/60 Hz), Slow: 500 ms (digital filter 10 Hz)
Measurement accuracy	Thermocouple K, J, E, T, N: ±0.1% f.s. ±1°C (±1.8°F), (±0.1% f.s. ±2°C (±3.6°F) at -200°C to 0°C (-328°F to 32°F)) Thermocouple R, S, B, W: ±0.1% f.s. ±3.5°C (±6.3°F) (at 0°C (32°F) to less than 400°C (752°F)); However, no accuracy guarantee at less than 400°C (752°F) for B, ±0.1% f.s. ±3°C (±5.4°F) (at 400°C (752°F) or more) Reference junction compensation [RJC] accuracy: ±1.5°C (±2.7°F) (added to measurement accuracy with internal reference junction compensation)

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 250 g (8.8 oz)
Accessories: None



Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 30 cm (0.98 ft), approx. 150 g (5.3 oz)
Note: The unit-side plug of the 9320-01 and 9327 is different from that of the 9320.



FREQ UNIT 8970	
(Accuracy at 23 ±5°C/73 ±9°F, 20 to 80% RH after 30 minutes of warm-up time; Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year)	
Measurement functions	No. of channels: 2, for voltage input based frequency measurement, rotation, power frequency, integration, pulse duty ratio, pulse width
Input terminals	Isolated BNC connector (input impedance 1 MΩ, input capacitance 30 pF), Max. rated voltage to ground: 300 V AC, DC (with input isolated from the unit, the maximum voltage that can be applied between input channel and chassis and between input channels without damage)
Frequency mode	Measurement range: Between DC to 100 kHz (minimum pulse width 2 μs), 20 Hz to 100 kHz f.s., 8 ranges Accuracy: ±0.1% f.s. (exclude 100 kHz range), ±0.7% f.s. (100 kHz range)
Rotation mode	Measurement range: Between 0 to 2 million rotations/minute (minimum pulse width 2 μs), 2 kr/min to 2 Mr/min f.s., 7 ranges Accuracy: ±0.1% f.s. (exclude 2 Mr/min range), ±0.7% f.s. (2 Mr/min range)
Power frequency mode	Measurement range: 50 Hz (40 to 60 Hz), 60 Hz (50 to 70 Hz), 400 Hz (390 to 410 Hz), 3 ranges Accuracy: ±0.03 Hz (50, 60 Hz), ±0.1 Hz (400 Hz range)
Integration mode	Measurement range: 40 k-counts f.s. to 20 M-counts f.s. 6 ranges Accuracy: ±0.0025% f.s.
Duty ratio mode	Measurement range: Between 10 Hz to 100 kHz (minimum pulse width 2 μs), 100% f.s. Accuracy: ±1% (10 Hz to 10 kHz), ±4% (10 kHz to 100 kHz)
Pulse width mode	Measurement range: Between 2 μs to 2 s, 10 ms to 2 s f.s. Accuracy: ±0.1% f.s.
Measurement resolution	0.0025% f.s. (Integration mode), 0.01% f.s. (exclude integration, power frequency mode), 0.01 Hz (power frequency mode)
Input voltage range and threshold level	±10 V to ±400 V, 6 ranges, selectable threshold level at each range
Other functions	Slope, Level, Hold, Smoothing, Low-pass filter, Switchable DC/AC input coupling, Frequency dividing, Integration over-range keep/return

Dimensions/mass: approx. 106 mm (4.17 in) W × 19.8 mm (0.78 in) H × 196.5 mm (7.74 in) D, approx. 190 g (6.7 oz)
Accessories: None



LOGIC PROBE 9320-01/9327	
Functions	Detection of voltage signal or relay contact signal for High/Low state recording 4 channels (common ground between unit and channels), digital/contact input, switchable (contact input can detect open-collector signals)
Input	Input impedance: 1 MΩ (with digital input, 0 to +5 V) 500 kΩ or higher (with digital input, +5 to +50 V) Pull-up resistance: 2 kΩ (contact input: internally pulled up to +5 V)
Digital input threshold	1.4 V / 2.5 V / 4.0 V
Contact input detection resistance	1.4 V: 1.5 kΩ or higher (open) and 500 Ω or lower (short) 2.5 V: 3.5 kΩ or higher (open) and 1.5 kΩ or lower (short) 4.0 V: 25 kΩ or higher (open) and 8 kΩ or lower (short)
Response speed	9320-01: 500 ns or lower, 9327: detectable pulse width 100 ns or higher
Maximum input voltage	0 to +50 V DC (the maximum voltage that can be applied across input pins without damage)

Cable length and mass: Main unit cable 1.5 m (4.92 ft), input section cable 1 m (3.28 ft), approx. 320 g (11.3 oz)
Note: The unit-side plug of the MR9321-01 is different from that of the MR9321.



LOGIC UNIT 8973	
Measurement functions	No. of channels: 16 channels (4 ch/1 probe connector × 4 connectors)
Input terminals	Mini DIN connector (for HIOKI logic probes only) Compatible logic probes: 9320-01, 9327, MR9321-01


LOGIC PROBE MR9321-01	
Functions	Detection of AC or DC relay drive signal for High/Low state recording Can also be used for power line interruption detection
Input	4 channels (isolated between unit and channels), HIGH/LOW range switching Input impedance: 100 kΩ or higher (HIGH range), 30 kΩ or higher (LOW range)
Output (H) detection	170 to 250 V AC, ±DC 70 to 250 V (HIGH range) 60 to 150 V AC, ±DC 20 to 150 V (LOW range)
Output (L) detection	0 to 30 V AC, ±DC 0 to 43 V (HIGH range) 0 to 10 V AC, ±DC 0 to 15 V (LOW range)
Response time	Rising edge 1 ms max., falling edge 3 ms max. (with HIGH range at 200 V DC, LOW range at 100 V DC)
Maximum input voltage	250 V rms (HIGH range), 150 V rms (LOW range) (the maximum voltage that can be applied across input pins without damage)

System Chart of Options

Model: MEMORY HiCORDER MR6000

Model No.
(Order code) (Specifications)


MR6000 (Main unit only, install up to 8 optional input modules)
MR6000-01 (Real-time waveform processing and other functions included)



Note: The main unit cannot operate alone. You must install one or more optional input modules in the unit. The Z5021, U8332, and U8333 are factory built-in options and cannot be installed by the user.


Factory-installed option A *Must specify when ordering

*Power can be supplied to up to 8 current sensors, including the current sensors connected to the CURRENT UNIT 8971.




PROBE POWER UNIT Z5021
Specified upon order, DC ±12 V, supply for up to 8 units

Factory-installed option B *Must specify when ordering



SSD UNIT U8332
Specified upon order; built-in type, 256 GB


Factory-installed option C *Must specify when ordering




HD UNIT U8333
Specified upon order; built-in type, 320 GB

Storage media


*Use only the storage media sold by HIOKI. Compatibility and performance are not guaranteed for storage media made by other manufacturers. You may be unable to read from or save data to such media.



SD MEMORY CARD Z4001
2 GB




SD MEMORY CARD Z4003
8 GB



USB DRIVE Z4006
16 GB
Using highly durable and reliable SLC flash memory

PC Software



Waveform Viewer Wv Standard accessory
Software for checking waveforms with binary data on a PC, saving data in CSV format, and transferring to spreadsheet programs

Operating environment:
Windows 10/8/7 (32/64-bit), Vista (32-bit), XP

Functions:
- Simple display of waveform files
- Convert binary data files to text format, CSV, etc.
- Scroll function, enlarge/reduce display, jump to cursor/trigger position, etc.


Case




CARRYING CASE C1010
Hard trunk type for storing the MR6000 with its optional devices

Input modules


*Input cords not included. Please purchase separately. *When using 9709 with CURRENT UNIT 8971, a total of 7 current probes can be used.




HIGH SPEED ANALOG UNIT U8976
2 ch, voltage input, 200 MS/s, (DC to 30 MHz)




ANALOG UNIT 8966
2 ch, voltage input, 20 MS/s, (DC to 5 MHz)




4ch ANALOG UNIT U8975
4 ch, voltage input, 5 MS/s, (DC to 2 MHz)




HIGH RESOLUTION UNIT 8968
2 ch, voltage input, 1 MS/s (DC to 100 kHz)




DC/RMS UNIT 8972
2 ch, voltage/1 MS/s, (DC to 400 kHz)
RMS rectifier (DC, 30 to 100 kHz)




HIGH-VOLTAGE UNIT U8974
2 ch, voltage input, max. 1000 V DC and 700 V AC




DIGITAL VOLTMETER UNIT MR8990
2 ch, high-precision DC voltage, 0.1 μV resolution, maximum sampling rate 500 times/s




CURRENT UNIT 8971
2 ch, for measuring current using dedicated current sensors, 2 CONVERSION CABLES 9318 included, for use with up to 4 units




TEMP UNIT 8967
2 ch, thermocouple temperature input




STRAIN UNIT U8969
2 ch, strain gauge type converter amp



CONVERSION CABLE L9769
(for STRAIN UNIT U8969 only, included)




FREQ UNIT 8970
2 ch, for measurement of frequency, RPM, pulse, etc.




LOGIC UNIT 8973
4 terminals, 16 ch, installable in all 8 slots


Logic signal measurement



LOGIC PROBE 9327
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 100 ns or more, miniature terminal type)




LOGIC PROBE MR9321-01
4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)




LOGIC PROBE 9320-01
4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)

External sampling measurement



CONNECTION CABLE L9795-01
Max. rated voltage to ground: 33 V AC rms or 70 V DC, SMB terminal to alligator clip, 1.5 m (4.92 ft)



CONNECTION CABLE L9795-02
Max. rated voltage to ground: 33 V AC rms or 70 V DC, SMB terminal to BNC terminal, 1.5 m (4.92 ft)

INPUT CORD (A) *Voltage is limited to the specifications of the input modules in use.



CONNECTION CORD L9790
Flexible ϕ 4.1 mm (0.16 in) thin dia. cable allowing for up to 600 V input, 1.8 m (5.91 ft) length
*The end clip is sold separately.

ALLIGATOR CLIP L9790-01
Red/black set attaches to the ends of the cables L9790

GRABBER CLIP 9790-02
*When this clip is attached to the end of the L9790, input is limited to CAT II 300 V. Red/black set.

CONTACT PIN 9790-03
Red/black set attaches to the ends of the cables L9790

INPUT CORD (B) *Voltage is limited to the specifications of the input modules in use.



CONNECTION CORD L9198
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 300 V input, 1.7 m (5.58 ft) length, small alligator clip

CONNECTION CORD L9197
 ϕ 5.0 mm (0.20 in) dia., cable allowing for up to 600 V input, 1.8 m (5.91 ft) length, detachable large alligator clips are bundled

GRABBER CLIP 9243
Attaches to the tip of the L9197, red/black set, full length: 196 mm (7.72 in)

INPUT CORD (C) *Voltage is limited to the specifications of the input modules in use.



10: 1 PROBE 9665
Max. rated voltage to ground is same as for input module, max. input voltage 1 kV rms (up to 500 kHz), 1.5 m (4.92 ft) length

100: 1 PROBE 9666
Max. rated voltage to ground is same as for input module, max. input voltage 5 kV peak (up to 1 MHz), 1.5 m (4.92 ft) length

INPUT CORD (D) *Voltage to ground is within this product's specifications. *Separate power source is also required.



DIFFERENTIAL PROBE P9000-01
(Wave Only) For Memory HiCorder, 1 kV AC, DC, Frequency band: 100 kHz

DIFFERENTIAL PROBE P9000-02
(Switch between Wave/RMS) For Memory HiCorder, 1 kV AC, DC, Frequency band: 100 kHz

AC ADAPTER Z1008
100 to 240 V AC

INPUT CORD (E) *Voltage to ground is within this product's specifications. *Separate power source is also required.



DIFFERENTIAL PROBE 9322
1 kV AC, 2 kV DC, Frequency band: 10 MHz

AC ADAPTER 9418-15
100 to 240 V AC

INPUT CORD (F) *Voltage input via banana terminals limited by the voltage specifications of the respective input unit.



CONNECTION CABLE L4940
Banana plug - banana plug, Cord length: 1.5 m (4.92 ft)

EXTENSION CABLE L4931
Extend the length of banana plug cables, Cable length: 1.5 m (4.92 ft)

ALLIGATOR CLIP L4935
Attach to the tip of banana plug cables, CAT IV 600 V, CAT III 1000 V

BUS BAR CLIP L4936
Attach to the tip of banana plug cables, CAT III 600 V

MAGNETIC ADAPTER L4937
Attach to the tip of banana plug cables, CAT III 1000 V

GRABBER CLIP 9243
Attach to the tip of banana plug cables, red/black set, full length: 196 mm (7.72 in), CAT III 1000 V

INPUT CORD (G) *For the MR8990 *Voltage is limited to the specifications of the input modules in use.



TEST LEAD L2200
Cable length: 70 cm, tips interchangeable with a pin test lead or alligator clip, maximum input voltage: CAT IV 600 V, CAT III 1000 V

Up to 200 A (High precision) *ME15W (12-pin) terminal type

High-precision pull-through current sensors, observe waveforms from DC to distorted AC

AC/DC CURRENT SENSOR CT6862-05, 1 MHz, 50 A
AC/DC CURRENT SENSOR CT6863-05, 500 kHz, 200 A

Observe waveforms from DC to distorted AC

AC/DC CURRENT PROBE CT6841-05, 1 MHz, 20 A
AC/DC CURRENT PROBE CT6843-05, 500 kHz, 200 A

Observe AC waveforms (cannot observe DC)

CLAMP ON SENSOR 9272-05, 100 kHz, 200 A

Up to 1000 A (High precision) *ME15W (12-pin) terminal type

High-precision pull-through current sensors, observe waveforms from DC to distorted AC

AC/DC CURRENT SENSOR 9709-05, 100 kHz, 500 A
AC/DC CURRENT SENSOR CT6865-05, 20 kHz, 1000 A

Observe waveforms from DC to distorted AC

AC/DC CURRENT PROBE CT6844-05, 200 kHz, 500 A
AC/DC CURRENT PROBE CT6845-05, 100 kHz, 500 A
AC/DC CURRENT PROBE CT6846-05, 20 kHz, 1000 A

Precautions for connecting high-precision current sensors

- High-precision current sensor (ME15W) + CT9901 + 9318 → CURRENT UNIT 8971
- High-precision current sensor (ME15W) + CT955x + BNC cable → except CURRENT UNIT 8971
- High-precision current sensor (PL23) + 9318 → CURRENT UNIT 8971
- High-precision current sensor (PL23) + CT9900 + CT955x + BNC cable → except CURRENT UNIT 8971

*The 9318 comes with the CURRENT UNIT 8971.

Other current sensor types

The MEMORY HiCORDER can be used with various types of current sensors and probes.

For details, see product information on Hioki's website.

10 mA class to 500 A (High speed)

CURRENT PROBE CT6700
Frequency characteristics: DC to 50 MHz wideband response, 1 mA-class up to 5 A rms

CURRENT PROBE CT6701
Frequency characteristics: DC to 120 MHz wideband response, 1 mA-class up to 5 A rms

CLAMP ON PROBE 3273-50
Frequency characteristics: DC to 50 MHz wideband response, 10 mA-class up to 30 A rms

CLAMP ON PROBE 3276
Frequency characteristics: DC to 100 MHz wideband response, 10 mA-class up to 30 A rms

CLAMP ON PROBE 3274
Frequency characteristics: DC to 10 MHz wideband response, up to 150 A rms

CLAMP ON PROBE 3275
Frequency characteristics: DC to 2 MHz wideband response, up to 500 A rms

Custom cable For P9000. Inquire with your local Hioki distributor.

- (1) Bus powered USB cable
- (2) USB(A)- Micro B cable
- (3) 3-prong cable

Non-contact voltage measuring

NON-CONTACT AC VOLTAGE PROBE SP3000-01
5 V rms rated, 10 Hz to 100 kHz band width

NON-CONTACT AC VOLTAGE PROBE SP3000
Sold individually

AC VOLTAGE PROBE SP9001
Sold individually

Other options for input

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, signal output use, 1.6 m (5.25 ft) length

CONVERSION ADAPTER 9199
Receiving side banana terminal, output BNC terminal

Temperature sensor

THERMOCOUPLE (K) 9810
Tolerance class: 2, Cable length: 5 m (16.41 ft), Wire diameter: ϕ 0.32 mm (0.01 in), 5/set

THERMOCOUPLE (T) 9811
Tolerance class: 2, Cable length: 5 m (16.41 ft), Wire diameter: ϕ 0.32 mm (0.01 in), 5/set

*A separate power supply (CT9555) is required in order to use a high-precision current sensor.
*Only sensors with ME15W (12-pin) terminals (-05 type) can be connected to the CT9555.
*The separately available CONVERSION CABLE CT9900 is required in order to use a sensor with a PL23 (10-pin) terminal.

POWER SUPPLY for Current Sensors

SENSOR UNIT CT9555,
1 ch, with waveform output
CONNECTION CORD L9217
Both cord ends are isolated BNC, 1.6 m (5.25 ft)

PL23 (10-pin) - ME15W (12-pin) conversion

CONVERSION CABLE CT9900
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

*The separately available CONVERSION CABLE CT9901 is required in order to use a high-precision current sensor equipped with a ME15W (12-pin) terminal (-05 type) with the CURRENT UNIT 8971.

*While the CT955x is not required in order to use a sensor equipped with a PL23 (10-pin) terminal with the 8971, the CONVERSION CABLE 9318 (which comes with the 8971) is required for that setup.

Directly connectable with the Current Sensor

CURRENT UNIT 8971

CONVERSION CABLE 9318
For connecting CT6841/43 and similar probes to 8971.

ME15W (12-pin) - PL23 (10-pin) conversion

CONVERSION CABLE CT9901
Convert ME15W (12-pin) terminal to PL23 (10-pin) terminal

Precautions for connecting current sensors and current probes

*Some combinations may not allow the devices to be connected simultaneously.
*Up to 4 CURRENT UNITS 8971 can be connected to the MEMORY HiCORDER main unit, and up to 8 current sensors can be used, including those connected to the PROBE POWER UNIT Z5021.
*There is no limit if you connect a current sensor to the voltage input analog unit.

Leak Current

*For commercial power lines, 50/60 Hz

CLAMP ON LEAK HITESTER 3283
10 mA range / 10 μ A resolution to 200 A range, with monitor / analog output 1 V f.s.

OUTPUT CORD L9094
3.5 mm (0.14 in) dia. mini plug to banana terminal, 1.5 m (4.92 ft) length

CONVERSION ADAPTER 9199
Receiving side banana terminal, output BNC terminal

OUTPUT CORD L9095
Connect to BNC terminal, 1.5 m (4.92 ft) length

OUTPUT CORD L9096
Connect to terminal block, 1.5 m (4.92 ft) length

AC ADAPTER 9445-02
100 to 240 V AC, 9 V / 1 A

R&D Tests and Critical Analyses

Meeting the High Demands of a Broad Range of Industries



High-speed 200 MS/s measurement of inverter waveforms

Perform high-speed isolated recording across 16 channels at 200 MS/s by installing 8 units of U8976.

MEMORY HiCORDER	MR6000	1 unit
HIGH SPEED ANALOG UNIT	U8976	8
10:1 PROBE	9665	16



Multi-channel measurement for ECU development

Perform multi-channel recording across 32 channels at 5 MS/s by installing 8 units of U8975.

MEMORY HiCORDER	MR6000	1 unit
4ch ANALOG UNIT	U8975	8
CONNECTION CORD	L9790	32
ALLIGATOR CLIP	L9790-01	32

Perform mixed multi-channel measurements across 16 analog and 64 logic channels by installing 4 units of U8975 and 4 units of 8973.

MEMORY HiCORDER	MR6000	1 unit
4ch ANALOG UNIT	U8975	4
CONNECTION CORD	L9790	16
ALLIGATOR CLIP	L9790-01	16
LOGIC UNIT	8973	4
LOGIC PROBE	9327	16



Remove harmonic noise

The MR6000-01 comes with a digital filter calculation function that removes specific frequency noise from measurement data.

MEMORY HiCORDER	MR6000-01	1 unit
ANALOG UNIT	8966	8
CONNECTION CORD	L9790	16
ALLIGATOR CLIP	L9790-01	16

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

TECNOLOGIA

HIOKI

Le tecnologie di misura Hioki sono ampiamente e globalmente utilizzate per manutenzione, controllo qualità, ricerca e sviluppo, in ambito industriale, aziendale e delle infrastrutture, contribuendo alla sicurezza ed alla protezione del nostro vivere quotidiano.

L'azienda supporta inoltre lo sviluppo delle tecnologie di nuova generazione nei settori automotive ed energie rinnovabili, favorendo la diffusione di prodotti di elevata qualità a prezzi competitivi.

La mission di Hioki è di produrre e divulgare tecnologie di misura volte a proteggere la sicurezza delle persone e consentire, attraverso il supporto alla ricerca, il progresso della scienza e della tecnica.



I numeri:

10% del fatturato investito in R&S

250 ingegneri impiegati nella ricerca

30 nuovi prodotti all'anno

100 brevetti depositati all'anno

1200 prodotti a catalogo

800.000 pezzi venduti all'anno

50 ppm (pezzi per milione) indice di difettosità

10.000 prove di apertura e chiusura per testare la durata dei toroidi

1 metro di caduta per testare la resistenza degli strumenti

Made in Japan



asita
TECNOLOGIE DI MISURA



s.r.l

Via Malpighi, 170
48018 Faenza (RA) - Italy
www.asita.com
asita@asita.com
+39 0546 620559
P.IVA 00202980397